



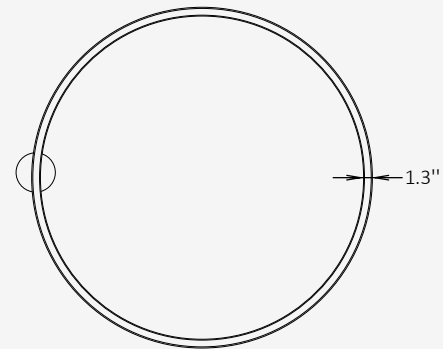

GENERAL INFORMATION

The Orbita Halo Circle is a striking circular pendant luminaire designed to deliver clean, uniform downlight with contemporary elegance. Engineered from precision-formed aluminum and equipped with an integrated LED module, it provides high-performance illumination ideal for hospitality, commercial, and modern residential applications. Available in multiple diameters and finishes, the fixture's slim, minimalist profile makes it a refined solution for open spaces, conference rooms, and statement installations.

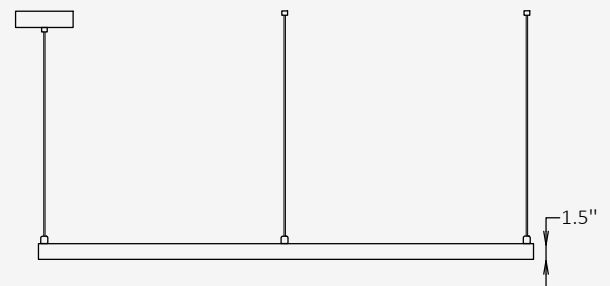


← $\varnothing 23.6'' / 35.4'' / 47.2'' / 59.1'' / 78.7'' / 98.4'' / 118.1'' / 157.5'' / 196.9''$ →

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59.1" / 78.7" / 98.4" / 118.1" / 157.5" / 196.9"
Profile Height	1.5"
Profile Width	1.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 50W / 80W / 100W / 120W / 160W / 200W / 300W / 400W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

OTHER VERSIONS AVAILABLE

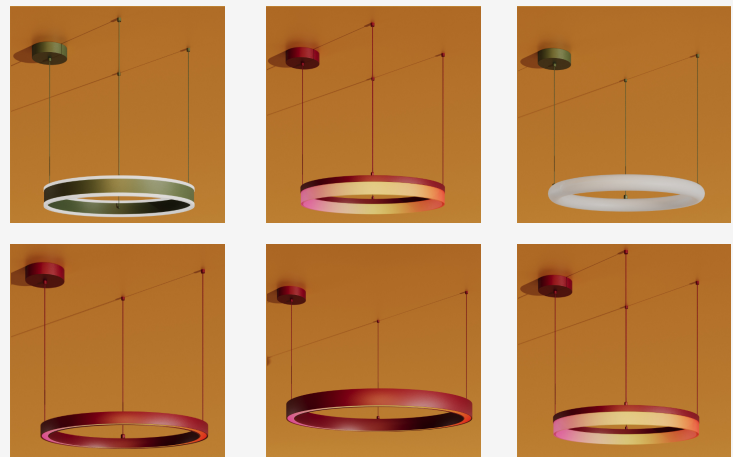

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> OTH Circle / Pendant	<input type="checkbox"/> 23 23.6" / 40 W / 3400 lm	<input type="checkbox"/> 98 98.4" / 160 W / 13,600 lm	<input type="checkbox"/> 30 3000K
	<input type="checkbox"/> 35 35.4" / 50 W / 4250 lm	<input type="checkbox"/> 118 118" / 200 W / 17,000 lm	<input type="checkbox"/> 35 3500K
	<input type="checkbox"/> 47 47.2" / 80 W / 6800 lm	<input type="checkbox"/> 157 157.5" / 300 W / 25,500 lm	<input type="checkbox"/> 40 4000K
	<input type="checkbox"/> 59 59.1" / 100 W / 8500 lm	<input type="checkbox"/> 196 196.9" / 400 W / 34,000 lm	
	<input type="checkbox"/> 78 78.7" / 120 W / 10,200 lm		
Light Distribution	Dimming	CRI	Profile Finish Option
<input checked="" type="checkbox"/> BD Beam Down	<input type="checkbox"/> NN Non-Dimmable	<input checked="" type="checkbox"/> CR9 90	<input type="checkbox"/> SW Satin White
	<input type="checkbox"/> DM 0-10V		<input type="checkbox"/> SB Satin Black
			<input type="checkbox"/> RAL RAL Finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
<input type="checkbox"/> WH White	<input type="checkbox"/> SVW White	<input type="checkbox"/> CT Central Canopy Suspension	<input type="checkbox"/> L6 59" (adjustable)
<input type="checkbox"/> BL Black	<input type="checkbox"/> SVB Black	<input type="checkbox"/> MO Multi-Point Suspension	<input type="checkbox"/> Cus Custom on request
<input type="checkbox"/> RAL RAL Finishes		<small>*Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"</small>	

Finishes


Standard finishes



RAL finishes



Cord finishes



RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Project

Notes

Photometric Data

