




GENERAL INFORMATION

The TELA pendant combines acoustic comfort with refined architectural lighting. Constructed from lightweight aluminum and 100% PET felt, it delivers both efficient illumination and superior sound absorption. With a minimalist geometric form and wide light distribution, TELA is ideal for restaurants, offices, and open spaces requiring both visual and acoustic balance.

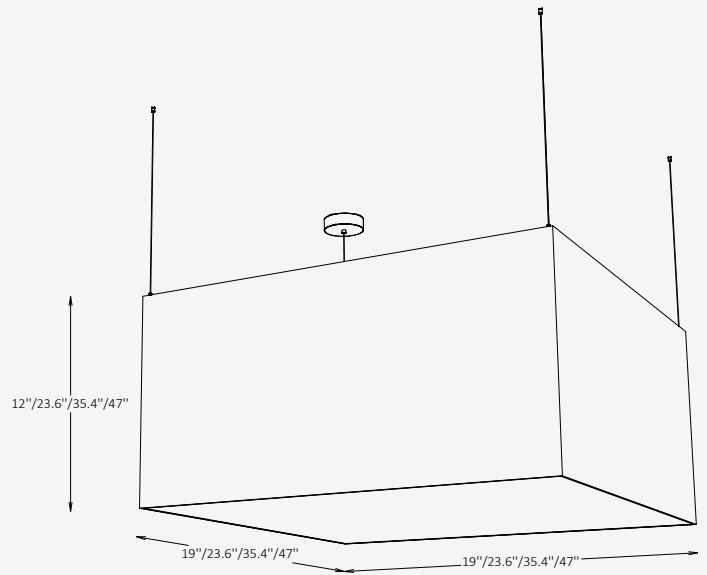

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length / Width	19" / 23.6" / 35.4" / 47"
Height	12" / 23.6" / 35.4" / 47"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	25W / 40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° (Direct)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE



CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width / Height / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> TLA Acoustic / Pendant	<input type="checkbox"/> 25-1 19" / 19" / 12" / 25 W / 2125 lm	<input type="checkbox"/> 90-1 35.4" / 35.4" / 12" / 90 W / 7650 lm	<input type="checkbox"/> 30 3000K
	<input type="checkbox"/> 25-2 19" / 19" / 23.6" / 25 W / 2125 lm	<input type="checkbox"/> 90-2 35.4" / 35.4" / 23.6" / 90 W / 7650 lm	<input type="checkbox"/> 35 3500K
	<input type="checkbox"/> 25-3 19" / 19" / 35.4" / 25 W / 2125 lm	<input type="checkbox"/> 90-3 35.4" / 35.4" / 35.4" / 90 W / 7650 lm	<input type="checkbox"/> 40 4000K
	<input type="checkbox"/> 25-4 19" / 19" / 47" / 25 W / 2125 lm	<input type="checkbox"/> 90-4 35.4" / 35.4" / 47.2" / 90 W / 7650 lm	
	<input type="checkbox"/> 40-1 23.6" / 23.6" / 12" / 40 W / 3400 lm	<input type="checkbox"/> 180-1 47.2" / 47.2" / 12" / 180 W / 15,300 lm	
	<input type="checkbox"/> 40-2 23.6" / 23.6" / 23.6" / 40 W / 3400 lm	<input type="checkbox"/> 180-2 47.2" / 47.2" / 23.6" / 180 W / 15,300 lm	
	<input type="checkbox"/> 40-3 23.6" / 23.6" / 35.4" / 40 W / 3400 lm	<input type="checkbox"/> 180-3 47.2" / 47.2" / 35.4" / 180 W / 15,300 lm	
	<input type="checkbox"/> 40-4 23.6" / 23.6" / 47" / 40 W / 3400 lm	<input type="checkbox"/> 180-4 47.2" / 47.2" / 47" / 180 W / 15,300 lm	
Dimming	Acoustic Fiber Finish Option	Canopy Finish Option	Cord Finish Option
<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> AF Acoustic fibers	<input type="checkbox"/> ST Standard	<input type="checkbox"/> SVW White
<input type="checkbox"/> DM 0-10V			<input type="checkbox"/> SVB Black
			<input type="checkbox"/> SVT Transparent
Cord Length			
<input type="checkbox"/> L11 118" (adjustable)			
<input type="checkbox"/> Cus Custom on request			

Photometric Data

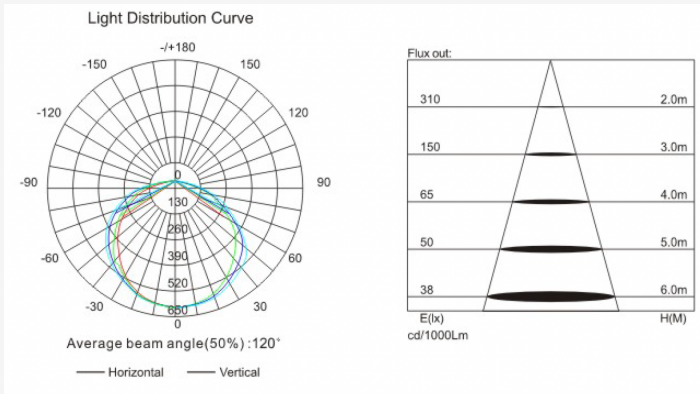

Project

Notes

Finishes

Acoustic fiber finishes



Standard finishes



Cord finishes




DBI MILK

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



DBI