




GENERAL INFORMATION

The ELIXA is a streamlined ceiling-mounted luminaire designed to deliver uniform, diffused illumination through its seamless polycarbonate lens and minimalist geometric housing. Its slim, contemporary profile integrates effortlessly into modern interiors, offering multiple lengths, outputs, and finish options to suit both residential and commercial applications. Engineered for visual comfort and design flexibility, ELIXA provides clean, consistent light distribution ideal for corridors, living spaces, hospitality environments, and architectural settings.

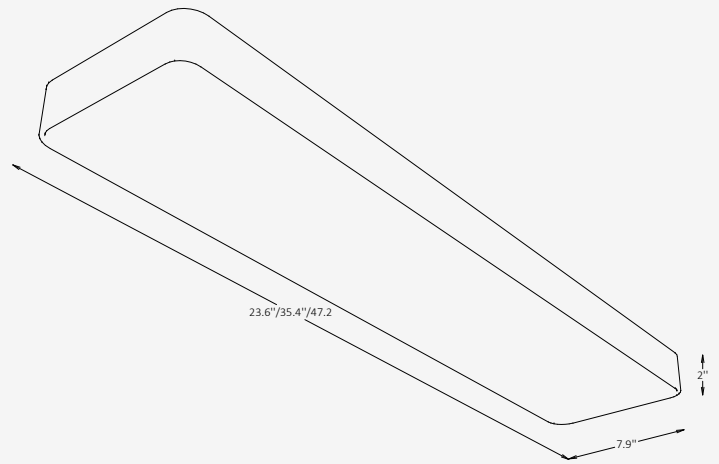

SPECIFICATIONS

Material	Metal
Lens	Polycarbonate
Length	23.6" / 35.4" / 47.2"
Height	2"
Width	7.9"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	20W / 30W / 40W / 50W
LED Output	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° Diffused Downlight
IP Rating	IP 20
Warranty	5 years
Finishes	28 RAL finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE



CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Profile Length	Profile Height	Profile Width
<input checked="" type="checkbox"/> ELX Ceiling	<input type="checkbox"/> 23 23.6" <input type="checkbox"/> 35 35.4" <input type="checkbox"/> 47 47.2" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 2 2" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 8 7.9" <input type="checkbox"/> Cus Custom on request
Wattage / Lumens	CCT	Dimming	Profile Finish Option
<input type="checkbox"/> 14 20W / 1400 lm <input type="checkbox"/> 21 30W / 2100 lm <input type="checkbox"/> 28 40W / 2800 lm <input type="checkbox"/> 35 50W / 3500 lm <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request
Mounting Type	Cord Finish Option	Cord Length	
<input type="checkbox"/> SFM Surface-mounted <input type="checkbox"/> SM Suspended-mounted	<input type="checkbox"/> ST Standard Vinyl <input type="checkbox"/> DB Decorative Braided <input type="checkbox"/> Cus Custom on request <p>Available only for the Suspended-mounted type*</p>	<input type="checkbox"/> L11 118" (adjustable) <input type="checkbox"/> Cus Custom on request <p>Available only for the Suspended-mounted type*</p>	

Project

Notes

Finishes


Standard finishes

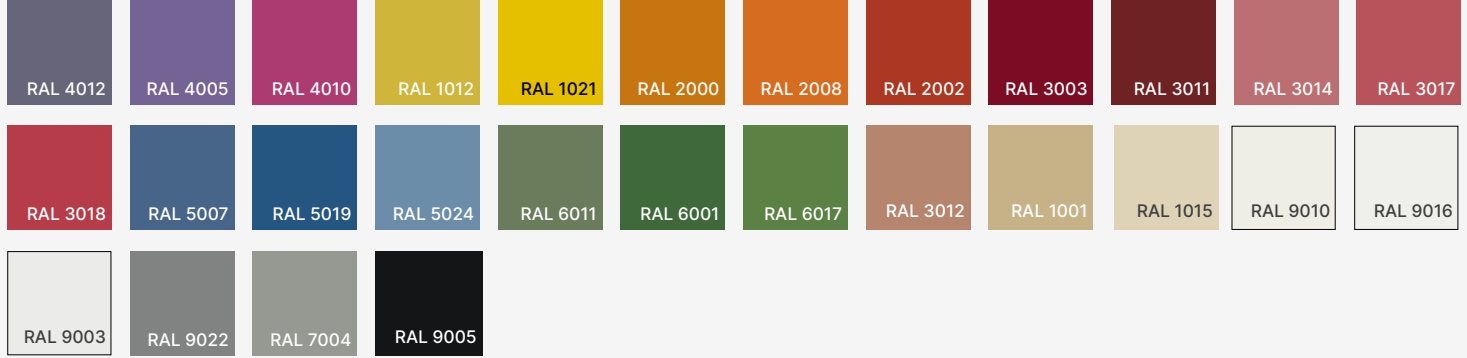

Wood-effect finishes



Metallic finishes



Cord finishes

Standard Vinyl

Decorative Braided



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

