




GENERAL INFORMATION

The TUNERA acoustic pendant merges modern geometry with high-performance illumination and sound absorption. Crafted from 100% P.E.T. felt and aluminum, its sculptural form reduces ambient noise while delivering either direct or bi-directional (direct + indirect) lighting. Available in multiple sizes and finishes, TUNERA is ideal for contemporary commercial and hospitality interiors where acoustics, efficiency, and aesthetics are equally prioritized.

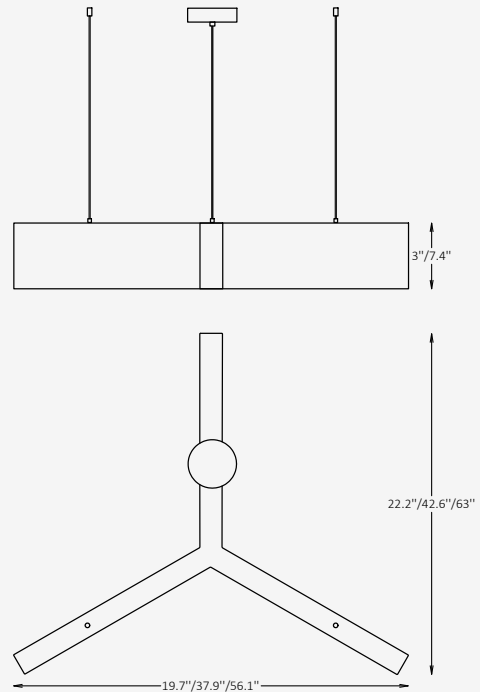

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length	19.7" / 37.9" / 56.1"
Width	22.2" / 42.6" / 63"
Height	3" / 7.4"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 80W / 120W (Direct) 50W / 100W / 140W (Direct + Indirect)
LED Output	105 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct / Direct + Indirect
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Length / Width / Wattage / Lumens		Profile Height
<input checked="" type="checkbox"/> TNR Acoustic / Pendant	<input type="checkbox"/> 42-DR 19.7" / 22.2" / 40 W / 4200 lm↓	<input type="checkbox"/> 52-DI 19.7" / 22.2" / 50 W / 5250 lm↑↓	<input type="checkbox"/> 3 3"
	<input type="checkbox"/> 84-DR 37.9" / 42.6" / 80 W / 8400 lm↓	<input type="checkbox"/> 105-DI 37.9" / 42.6" / 100 W / 10,500 lm↑↓	<input type="checkbox"/> 7 7.4"
	<input type="checkbox"/> 126-DR 56.1" / 63" / 120 W / 12,600 lm↓	<input type="checkbox"/> 147-DI 56.1" / 63" / 140 W / 14,700 lm↑↓	
	*Light Distribution - 120° Direct		*Light Distribution - 2 x 120° Direct / Indirect
CCT	Dimming	Acoustic Fiber Finish Option	Canopy Finish Option
<input type="checkbox"/> 30 3000K	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> AF Acoustic fibers	<input type="checkbox"/> ST Standard
<input type="checkbox"/> 35 3500K	<input type="checkbox"/> DM 0-10V		<input type="checkbox"/> RAL RAL finishes
<input type="checkbox"/> 40 4000K			
Cord Finish Option	Cord Length		
<input type="checkbox"/> SVW White	<input type="checkbox"/> L5 59" (adjustable)		
<input type="checkbox"/> SVB Black	<input type="checkbox"/> Cus Custom on request		
<input type="checkbox"/> SVT Transparent			

Finishes

Acoustic fiber finishes



Standard finishes



Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

