




## GENERAL INFORMATION

The RESONO acoustic pendant merges high-performance lighting with sound-absorbing functionality, offering a refined solution for modern interior environments. Crafted from durable aluminum and premium polyester acoustic fiber, it provides both direct or bi-directional illumination while contributing to improved acoustic comfort. Ideal for offices, hospitality, and open-plan spaces, RESONO brings together form, function, and sustainability in a clean architectural profile.

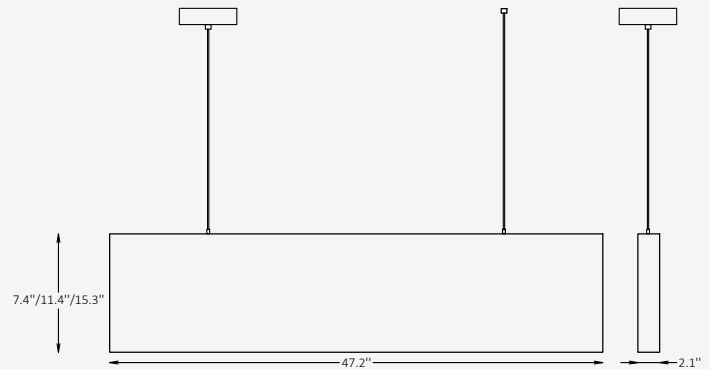

## SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length	47.2"
Width	2.1"
Height	7.4" / 11.4" / 15.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W - Direct / 50W - Direct + Indirect
LED Output	105 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct / Direct + Indirect
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



# Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Height	Wattage / Lumens	CCT
<input checked="" type="checkbox"/> <b>RSO</b> Acoustic / Pendant	<input type="checkbox"/> <b>7</b> 7.4"	<input type="checkbox"/> <b>40-DR</b> 40 W / 4200 lm↓	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>11</b> 11.4"	<input type="checkbox"/> <b>50-DI</b> 36 W / 3780 lm↓ 14 W / 1470 lm↑	<input type="checkbox"/> <b>35</b> 3500K
	<input type="checkbox"/> <b>15</b> 15.3"		<input type="checkbox"/> <b>40</b> 4000K
Dimming	Acoustic Fiber Finish Option	Canopy Finish Option	Cord Finish Option
<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>AF</b> Acoustic fibers	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>SVW</b> White
<input type="checkbox"/> <b>DM</b> 0-10V		<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>SVB</b> Black
			<input type="checkbox"/> <b>SVT</b> Transparent
Cord Length			
<input type="checkbox"/> <b>L5</b> 59" (adjustable)			
<input type="checkbox"/> <b>Cus</b> Custom on request			

# Finishes

## Acoustic fiber finishes



## Standard finishes




## Cord finishes




**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



# Photometric Data

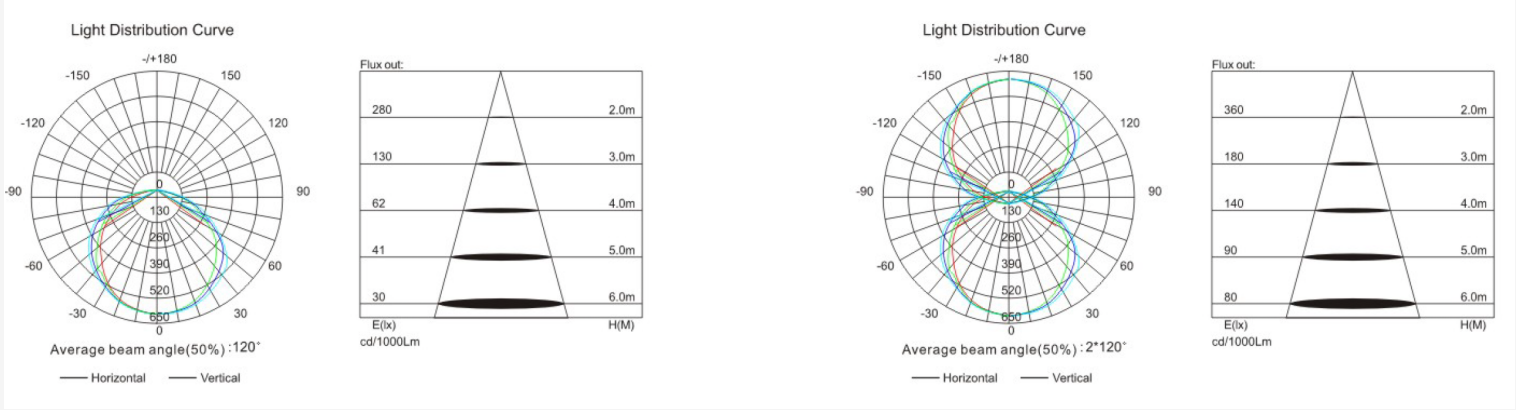

DBI  
MILK