




## GENERAL INFORMATION

The AURALIS pendant delivers expansive 300° beam coverage with a sleek, ultra-slim profile, seamlessly combining acoustic absorption and functional illumination. Crafted from 100% P.E.T. felt and polycarbonate, its refined design makes it ideal for modern commercial, educational, and hospitality spaces seeking both visual comfort and sound control. Offered in multiple sizes and finishes, AURALIS balances performance and aesthetics in open environments.

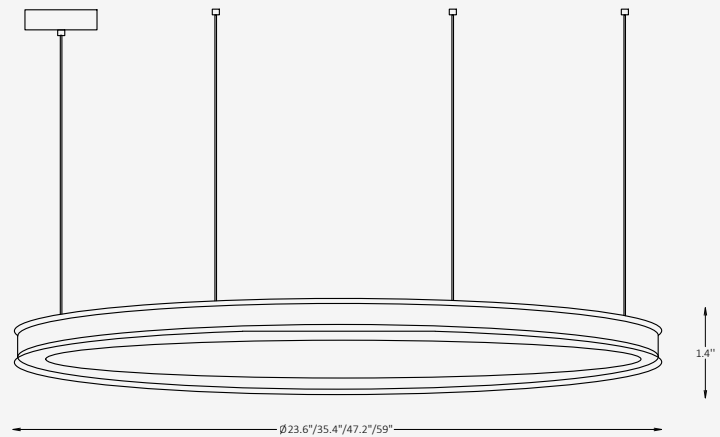

## SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59"
Height	1.4"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	32W / 40W / 70W / 80W
LED Output	70 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	300° (Beam Out)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



# Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>ALS</b> Acoustic / Pendant	<input type="checkbox"/> <b>22</b> 23.6" / 32 W / 2240 lm	<input type="checkbox"/> <b>49</b> 47.2" / 70 W / 4900 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>28</b> 35.4" / 40 W / 2800 lm	<input type="checkbox"/> <b>56</b> 59" / 80 W / 5600 lm	<input type="checkbox"/> <b>35</b> 3500K
			<input type="checkbox"/> <b>40</b> 4000K
Light Distribution	Dimming	Acoustic Fiber Finish Option	Profile Finish Option
<input checked="" type="checkbox"/> <b>BO</b> 300° (Beam Out)	<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>AF</b> Acoustic fibers	<input type="checkbox"/> <b>ST</b> Standard
	<input type="checkbox"/> <b>DM</b> 0-10V		<input type="checkbox"/> <b>RAL</b> RAL finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>SVW</b> White	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension	<input type="checkbox"/> <b>L5</b> 59" (adjustable)
<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>SVB</b> Black	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension	
	<input type="checkbox"/> <b>SVT</b> Transparent		

# Finishes

## Acoustic fiber finishes



## Standard finishes



## Cord finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

