




## GENERAL INFORMATION

The TELA pendant combines acoustic comfort with refined architectural lighting. Constructed from lightweight aluminum and 100% PET felt, it delivers both efficient illumination and superior sound absorption. With a minimalist geometric form and wide light distribution, TELA is ideal for restaurants, offices, and open spaces requiring both visual and acoustic balance.

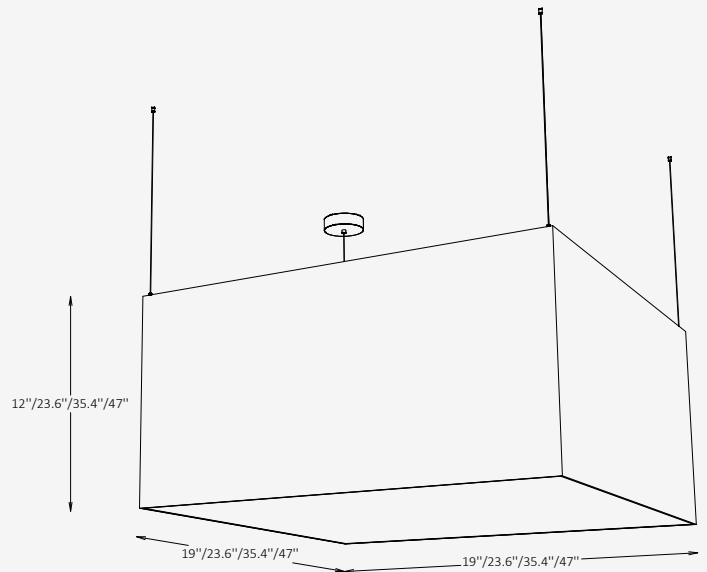

## SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length / Width	19" / 23.6" / 35.4" / 47"
Height	12" / 23.6" / 35.4" / 47"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	25W / 40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° (Direct)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

## OTHER VERSIONS AVAILABLE



## CERTIFICATION




# Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width / Height / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>TLA</b> Acoustic / Pendant	<input type="checkbox"/> <b>25-1</b> 19" / 19" / 12" / 25 W / 2125 lm	<input type="checkbox"/> <b>90-1</b> 35.4" / 35.4" / 12" / 90 W / 7650 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>25-2</b> 19" / 19" / 23.6" / 25 W / 2125 lm	<input type="checkbox"/> <b>90-2</b> 35.4" / 35.4" / 23.6" / 90 W / 7650 lm	<input type="checkbox"/> <b>35</b> 3500K
	<input type="checkbox"/> <b>25-3</b> 19" / 19" / 35.4" / 25 W / 2125 lm	<input type="checkbox"/> <b>90-3</b> 35.4" / 35.4" / 35.4" / 90 W / 7650 lm	<input type="checkbox"/> <b>40</b> 4000K
	<input type="checkbox"/> <b>25-4</b> 19" / 19" / 47" / 25 W / 2125 lm	<input type="checkbox"/> <b>90-4</b> 35.4" / 35.4" / 47.2" / 90 W / 7650 lm	
	<input type="checkbox"/> <b>40-1</b> 23.6" / 23.6" / 12" / 40 W / 3400 lm	<input type="checkbox"/> <b>180-1</b> 47.2" / 47.2" / 12" / 180 W / 15,300 lm	
	<input type="checkbox"/> <b>40-2</b> 23.6" / 23.6" / 23.6" / 40 W / 3400 lm	<input type="checkbox"/> <b>180-2</b> 47.2" / 47.2" / 23.6" / 180 W / 15,300 lm	
	<input type="checkbox"/> <b>40-3</b> 23.6" / 23.6" / 35.4" / 40 W / 3400 lm	<input type="checkbox"/> <b>180-3</b> 47.2" / 47.2" / 35.4" / 180 W / 15,300 lm	
	<input type="checkbox"/> <b>40-4</b> 23.6" / 23.6" / 47" / 40 W / 3400 lm	<input type="checkbox"/> <b>180-4</b> 47.2" / 47.2" / 47" / 180 W / 15,300 lm	
<b>Dimming</b>	<b>Acoustic Fiber Finish Option</b>	<b>Canopy Finish Option</b>	<b>Cord Finish Option</b>
<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>AF</b> Acoustic fibers	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>SVW</b> White
<input type="checkbox"/> <b>DM</b> 0-10V		<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>SVB</b> Black
			<input type="checkbox"/> <b>SVT</b> Transparent
<b>Cord Length</b>			
<input type="checkbox"/> <b>L11</b> 118" (adjustable)			
<input type="checkbox"/> <b>Cus</b> Custom on request			

# Photometric Data

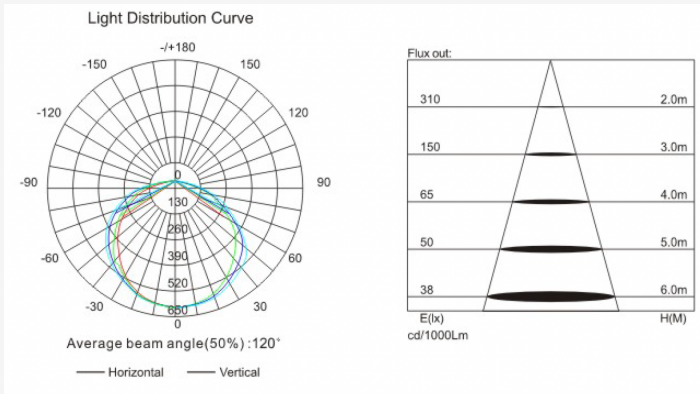

Project


Notes

# Finishes

## Acoustic fiber finishes



## Standard finishes



## Cord finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS):** RAL \_ \_ \_ \_

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

