



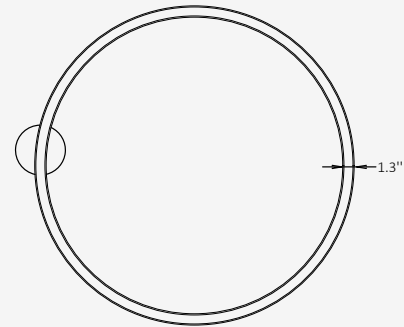

## GENERAL INFORMATION

The VIBRA is a contemporary acoustic pendant designed to elevate both lighting performance and spatial comfort. Its streamlined circular form integrates high-density acoustic fiber with a refined aluminum frame, delivering effective sound absorption while providing soft, controlled illumination. Engineered for modern hospitality, workspace, and residential environments, VIBRA offers multiple diameters, color temperatures, and finish options—allowing it to adapt seamlessly to projects that demand both visual elegance and acoustic enhancement.

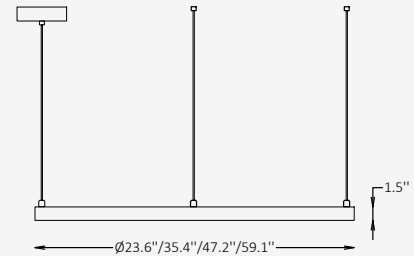

## SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59"
Height	1.5"
Width	1.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 50W / 80W / 100W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° (Beam Down)
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>VBR</b> Acoustic / Pendant	<input type="checkbox"/> <b>34</b> 23.6" / 40 W / 3400 lm	<input type="checkbox"/> <b>68</b> 47.2" / 80 W / 6800 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>42</b> 35.4" / 50 W / 4250 lm	<input type="checkbox"/> <b>85</b> 59" / 100 W / 8500 lm	<input type="checkbox"/> <b>35</b> 3500K
			<input type="checkbox"/> <b>40</b> 4000K
Light Distribution	Dimming	Profile Finish Option	Acoustic Fiber Finish Option
<input checked="" type="checkbox"/> <b>BD</b> 120° (Beam Down)	<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>AF</b> Acoustic fibers
	<input type="checkbox"/> <b>DM</b> 0-10V	<input type="checkbox"/> <b>RAL</b> RAL finishes	
Canopy Finish Option	Cord Length	Cord Finish Option	Mounting
<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>L5</b> 59" (adjustable)	<input type="checkbox"/> <b>SVW</b> White	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension
<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>SVB</b> Black	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension
		<input type="checkbox"/> <b>SVT</b> Transparent	

## Finishes

### Acoustic fiber finishes



### Standard finishes



### Cord finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

