




## GENERAL INFORMATION

PLIN is an outdoor bollard luminaire defined by a clean cylindrical form and a durable die-cast aluminum body with a clear acrylic diffuser. The minimalist design delivers a balanced visual presence while ensuring long-lasting performance in outdoor environments. Its refined geometry integrates naturally into contemporary architectural and landscape settings. Designed to provide uniform 360° symmetrical illumination, PILL is well suited for pathways, walkways, gardens, and public outdoor spaces where reliable and visually comfortable lighting is required.

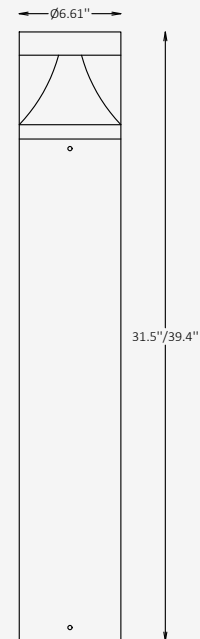

## SPECIFICATIONS

<b>Material</b>	Die-cast aluminium + PMMA
<b>Lens</b>	Clear, Acrylic
<b>Diameter</b>	6.6"
<b>Total Height</b>	31.5" / 39.4"
<b>Light Source Type</b>	LED
<b>Power</b>	20W / 25W / 30W
<b>Input Voltage</b>	110-277V, 50-60 Hz
<b>LED Output</b>	70 lm/W
<b>CCT</b>	2200K / 2700K / 3000K / 4000K / 5000K
<b>CRI</b>	80
<b>Dimming &amp; Driver</b>	Integral, 0-10V / PWM / DALI
<b>Light Distribution</b>	Type V 360° symmetrical light distribution
<b>IP Rating</b>	IP 65
<b>IK Rating</b>	IK 08
<b>Warranty</b>	1 years
<b>Finishing</b>	Black (smooth glossy)

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> <b>PLN-B</b> Bollard	<input checked="" type="checkbox"/> <b>6</b> 6.6"	<input type="checkbox"/> <b>31</b> 31.5" <input type="checkbox"/> <b>39</b> 39.4"	<input checked="" type="checkbox"/> <b>AL</b> Die-cast aluminium
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> <b>22</b> 2200K	<input type="checkbox"/> <b>14</b> 20 W / 1400 lm	<input checked="" type="checkbox"/> <b>LD5</b> Type V 360° symmetrical light distribution	<input type="checkbox"/> <b>NN</b> Non-Dimmable
<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>17</b> 25 W / 1750 lm		<input type="checkbox"/> <b>DM</b> 0-10V
<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>21</b> 30 W / 2100 lm		<input type="checkbox"/> <b>PWM</b> PWM
<input type="checkbox"/> <b>40</b> 4000K			<input type="checkbox"/> <b>DL</b> DALI
<input type="checkbox"/> <b>50</b> 5000K			
Appliance Class	Body Finish Option	Mounting	
<input type="checkbox"/> <b>AC-I</b> Class I	<input checked="" type="checkbox"/> <b>RAL 9005</b> RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> <b>SM</b> Surface-mounted	
<input type="checkbox"/> <b>AC-II</b> Class II			

## Finishes

### Standard finishes



RAL 9005