




## GENERAL INFORMATION


PARK is an architectural outdoor bollard luminaire defined by its bold cantilevered form and clear directional intent. The solid stainless-steel body and sharp horizontal overhang create a confident, sculptural presence while emphasizing durability and material integrity. Designed to deliver controlled, downward illumination with a symmetrical Type V distribution, PARK is ideal for pathways, public spaces, and landscape applications where clear visual guidance, glare control, and a strong contemporary identity are required.

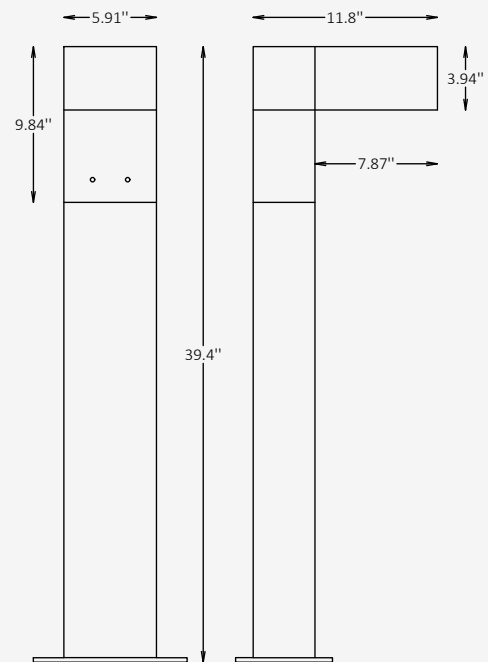

## SPECIFICATIONS

Material	Aluminium + PMMA
Lens	Acrylic
Total Height	39.4"
Length	5.91"
Light Source Type	LED
Power	20W / 25W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	110 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 66
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)

## OTHER VERSIONS AVAILABLE

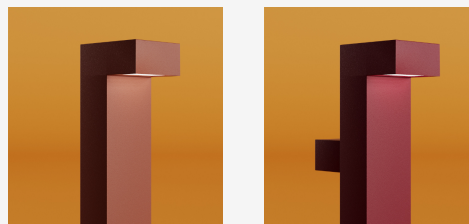

## CERTIFICATION



Project

Notes

## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length	Material	CCT
<input checked="" type="checkbox"/> <b>TDN-B</b> Bollard	<input checked="" type="checkbox"/> <b>23</b> 39.4" / 5.91"	<input checked="" type="checkbox"/> <b>AL</b> Aluminium	<input type="checkbox"/> <b>22</b> 2200K <input type="checkbox"/> <b>27</b> 2700K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>50</b> 5000K
Wattage / Lumens	Light Distribution	Dimming	Appliance Class
<input type="checkbox"/> <b>22</b> 20 W / 2200 lm <input type="checkbox"/> <b>27</b> 25 W / 2750 lm <input type="checkbox"/> <b>33</b> 30 W / 3300 lm	<input checked="" type="checkbox"/> <b>LD5</b> Type V – symmetrical, downward	<input type="checkbox"/> <b>NN</b> Non-Dimmable <input type="checkbox"/> <b>DM</b> 0-10V	<input checked="" type="checkbox"/> <b>AC-I</b> Class I
Body Finish Option	Mounting		
<input checked="" type="checkbox"/> <b>RAL 9005</b> RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> <b>SM</b> Surface-mounted		

## Finishes

### Standard finishes

RAL 9005