




## GENERAL INFORMATION


TALUS is a compact outdoor bollard luminaire characterized by its bold linear profile and pronounced cantilevered head, creating a confident architectural expression with clear directional intent. The solid aluminum construction and crisp geometry emphasize material strength while ensuring durability in demanding exterior conditions. Designed to provide controlled, downward illumination with a symmetrical Type V distribution, TALUS is well suited for pathways, entrances, and landscape environments where precise light placement, visual comfort, and a strong contemporary identity are essential.

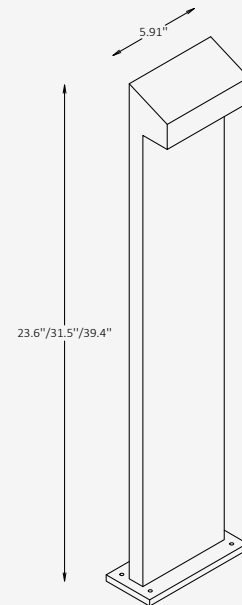

## SPECIFICATIONS

|                    |                                |
|--------------------|--------------------------------|
| Material           | Aluminium                      |
| Lens               | Tempered glass                 |
| Height             | 23.6" / 31.5" / 39.4"          |
| Length             | 5.91"                          |
| Light Source Type  | LED                            |
| Power              | 12W                            |
| Input Voltage      | 110-277V, 50-60 Hz             |
| LED Output         | 120 lm/W                       |
| CCT                | 3000K / 4000K / 6000K          |
| CRI                | 80                             |
| Dimming & Driver   | Integral, 0-10V                |
| Light Distribution | Type V – symmetrical, downward |
| IP Rating          | IP 65                          |
| Warranty           | 5 years                        |
| Finishing          | 16 standard finishes           |

## OTHER VERSIONS AVAILABLE

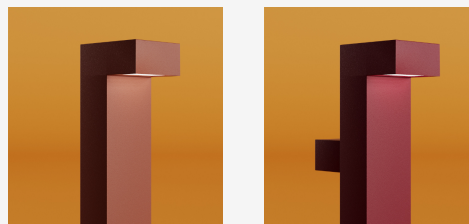

## CERTIFICATION



Project

Notes

## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code  | Height  | Material  | CCT   |
|---|---|---|---|
| <input checked="" type="checkbox"/> <b>TLS</b><br>Bollard                                   | <input type="checkbox"/> <b>23</b><br>23.6"<br><input type="checkbox"/> <b>31</b><br>31.5"<br><input type="checkbox"/> <b>39</b><br>39.4" | <input checked="" type="checkbox"/> <b>AL</b><br>Aluminium  | <input type="checkbox"/> <b>30</b><br>3000K<br><input type="checkbox"/> <b>40</b><br>4000K<br><input type="checkbox"/> <b>60</b><br>6000K |
| Wattage / Lumens  | Light Distribution  | Dimming   | Body Finish Option  |
| <input checked="" type="checkbox"/> <b>14</b><br>12 W / 1440 lm                             | <input checked="" type="checkbox"/> <b>LD5</b><br>Type V – symmetrical,<br>downward   | <input type="checkbox"/> <b>NN</b><br>Non-Dimmable<br><input type="checkbox"/> <b>DM</b><br>0-10V | <input type="checkbox"/> <b>ST</b><br>Standard<br><input type="checkbox"/> <b>Cus</b><br>Custom on request                                |
| Finish Type   | Mounting  |   |   |
| <input type="checkbox"/> <b>GL</b><br>Glossy<br><input type="checkbox"/> <b>MT</b><br>Matte | <input checked="" type="checkbox"/> <b>SM</b><br>Surface-mounted  |   |   |

## Finishes

### Standard finishes

