




GENERAL INFORMATION

ALTIS C is a vertical lighting column defined by its clean architectural form and precise light control. The slender structure integrates linear light elements within a durable aluminum body, creating a strong yet minimal presence in outdoor environments. Designed to deliver controlled directional illumination, ALTIS C offers multiple beam angle options, allowing the light to be tailored for pathways, plazas, and large-scale architectural applications. Its clear glass elements enhance visual clarity while maintaining performance, and its robust construction ensures long-term reliability in exterior conditions. Combining functional lighting with a refined geometric identity, ALTIS C acts as both an illumination tool and an architectural feature within the space.

SPECIFICATIONS

Material	Aluminum
Lens	Clear tempered glass
Length / Width	6" x 6"
Total Height	98" / 118" / 144"
Base Height	34.25" / 54" / 79.5"
Light Source Type	LED
Power	20W / 28W / 42W / 48W / 60W / 70W / 80W / 90W
Input Voltage	110-277V, 50-60 Hz
LED Output	80 lm/W
CCT	3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	20° / 45° / 75°
IP Rating	IP 66
Warranty	5 years
Finishes	16 standard finishes

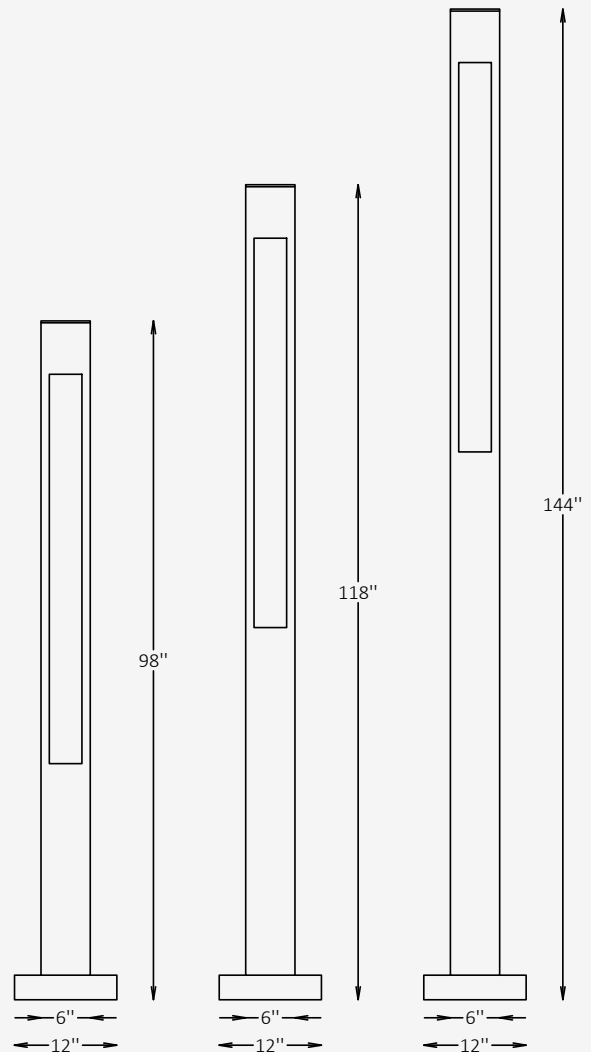

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width	Height	Material
<input checked="" type="checkbox"/> LTS-C Column	<input checked="" type="checkbox"/> 6 6" x 6"	<input type="checkbox"/> 98 98" <input type="checkbox"/> 118 118" <input type="checkbox"/> 144 144"	<input checked="" type="checkbox"/> AL Aluminum
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K	<input type="checkbox"/> 20 20W / 1600 lm <input type="checkbox"/> 28 28W / 2000 lm <input type="checkbox"/> 42 42W / 2500 lm <input type="checkbox"/> 48 48W / 2800 lm <input type="checkbox"/> 60 60W / 3500 lm <input type="checkbox"/> 70 70W / 4000 lm <input type="checkbox"/> 80 80W / 4500 lm <input type="checkbox"/> 90 90W / 5000 lm	<input type="checkbox"/> LD-EN Symmetric Extra Narrow (20°) <input type="checkbox"/> LD-N Symmetric Narrow (45°) <input type="checkbox"/> LD-W Symmetric Wide (75°)	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V
Body Finish Option	Mounting		
<input type="checkbox"/> ST Standard	<input checked="" type="checkbox"/> AB Anchored Base		

Finishes

Standard finishes

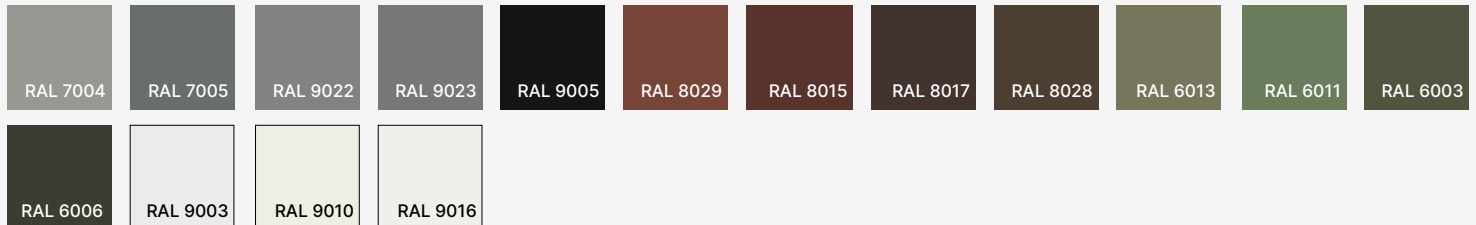

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

