




## GENERAL INFORMATION

ECLUNA SP is a minimal circular pendant defined by its ultra-slim profile and clean, uniform light surface. The refined geometry creates a calm and balanced presence, delivering smooth, glare-controlled illumination through a continuous frosted diffuser. Designed for offices, residential interiors, and hospitality environments, ECLUNA SP provides efficient direct lighting with a soft visual comfort. Its lightweight aluminum construction and wide range of sizes and finishes allow for seamless integration into both standalone and grouped compositions, offering a versatile and timeless lighting solution.

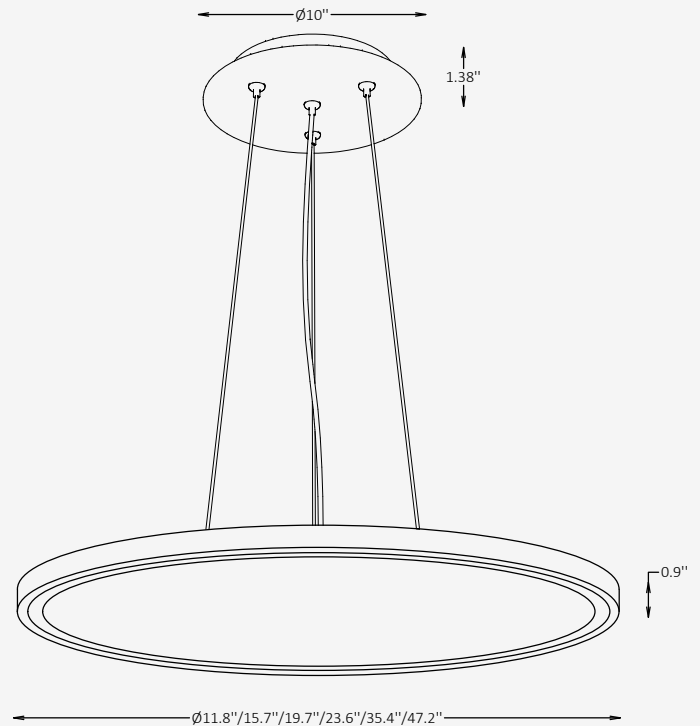

## SPECIFICATIONS

Material	Aluminum
Diffuser	Acrylic, Frosted
Diameter	11.8" / 15.7" / 19.7" / 23.6" / 35.4" / 47.2"
Height	0.9"
Input Voltage	110-277V
Light Source	LED
Power	15W / 20W / 30W / 40W / 90W / 120W
LED Output	80 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct
IP Rating	IP 20
Warranty	5 years
Finishes	White / Black 23 RAL finishes

## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens	CCT	Dimming
<input checked="" type="checkbox"/> <b>ECL-SP</b> Pendant	<input type="checkbox"/> <b>11</b> 11.8" / 15W / ↓1200 lm	<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>NN</b> Non-Dimmable
	<input type="checkbox"/> <b>15</b> 15.7" / 20W / ↓1600 lm	<input type="checkbox"/> <b>35</b> 3500K	<input type="checkbox"/> <b>DM</b> 0-10V
	<input type="checkbox"/> <b>19</b> 19.7" / 30W / ↓2400 lm	<input type="checkbox"/> <b>40</b> 4000K	
	<input type="checkbox"/> <b>23</b> 23.6" / 40W / ↓3200 lm	<input type="checkbox"/> <b>Cus</b> Custom on request	
	<input type="checkbox"/> <b>35</b> 35.4" / 90W / ↓7200 lm		
	<input type="checkbox"/> <b>47</b> 47.2" / 120W / ↓9600 lm		
CRI	Profile Finish Option	Canopy Finish Option	Cord Finish Option
<input type="checkbox"/> <b>CR8</b> 80	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>SVW</b> White
<input type="checkbox"/> <b>CR9</b> 90	<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>RAL</b> RAL finishes	<input type="checkbox"/> <b>SVB</b> Black
Cord Length	Mounting		
<input type="checkbox"/> <b>L6</b> 59" (adjustable)	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension		
<input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension		

## Finishes


### Standard finishes



### RAL finishes

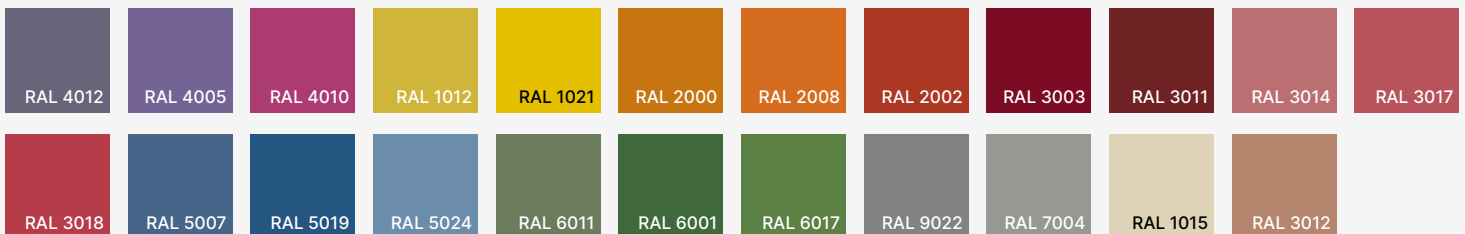

### Cord finishes



DBI  
MILK

**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

