




GENERAL INFORMATION

ECLUNA SM is a surface-mounted ceiling luminaire defined by its slim circular profile and clean, uniform light surface. The minimalist design integrates seamlessly into the ceiling plane, delivering soft and evenly distributed illumination through a continuous frosted diffuser. Designed for offices, residential interiors, and commercial environments, ECLUNA SM provides efficient direct lighting with enhanced visual comfort. Its low-profile aluminum construction and range of sizes and finishes allow for flexible application, making it an ideal solution for both standalone installations and cohesive lighting layouts.

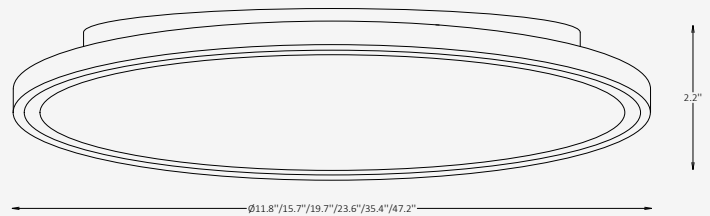

SPECIFICATIONS

Material	Aluminum
Diffuser	Acrylic, Frosted
Diameter	11.8" / 15.7" / 19.7" / 23.6" / 35.4" / 47.2"
Height	2.2"
Input Voltage	110-277V
Light Source	LED
Power	15W / 20W / 30W / 40W / 90W / 120W
LED Output	80 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct
IP Rating	IP 20
Warranty	5 years
Finishes	White / Black 23 RAL finishes

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens	CCT	Dimming
<input checked="" type="checkbox"/> ECL-SM Pendant	<input type="checkbox"/> 11 11.8" / 15W / ↓1200 lm	<input type="checkbox"/> 30 3000K	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V
	<input type="checkbox"/> 15 15.7" / 20W / ↓1600 lm	<input type="checkbox"/> 35 3500K	
	<input type="checkbox"/> 19 19.7" / 30W / ↓2400 lm	<input type="checkbox"/> 40 4000K	
	<input type="checkbox"/> 23 23.6" / 40W / ↓3200 lm	<input type="checkbox"/> Cus Custom on request	
	<input type="checkbox"/> 35 35.4" / 90W / ↓7200 lm		
	<input type="checkbox"/> 47 47.2" / 120W / ↓9600 lm		
CRI	Profile Finish Option	Canopy Finish Option	
<input type="checkbox"/> CR8 80	<input type="checkbox"/> ST Standard	<input type="checkbox"/> ST Standard	
<input type="checkbox"/> CR9 90	<input type="checkbox"/> RAL RAL finishes	<input type="checkbox"/> RAL RAL finishes	

Finishes

Standard finishes



RAL finishes

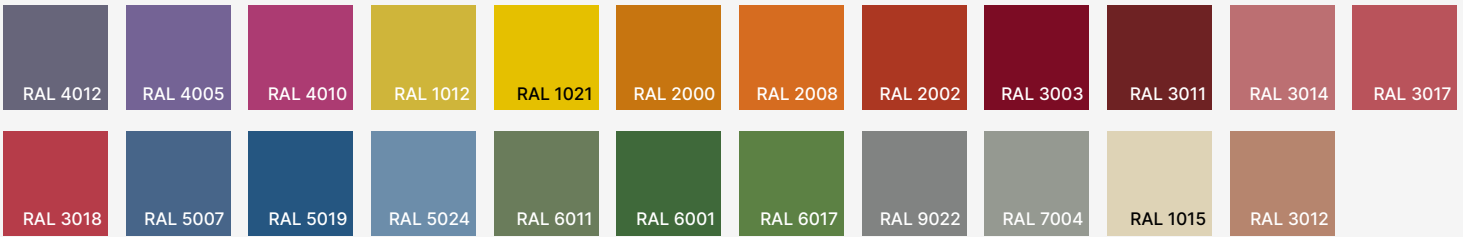

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

