



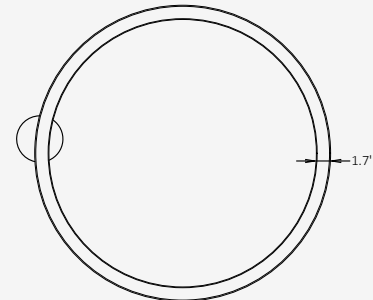

GENERAL INFORMATION

The FELTIS is an acoustic ring pendant developed to balance high-efficiency lighting with elevated spatial comfort. Its generous circular profile combines a sculpted aluminum frame with a full-depth PET felt body, delivering meaningful sound absorption while providing layered up- and down-light for balanced ambient illumination. Tailored for contemporary hospitality, workplace, and education environments, FELTIS is available in multiple diameters, outputs, distributions, and acoustic/metal finish combinations—allowing it to become a quiet yet expressive statement piece in projects that demand both visual refinement and acoustic performance.

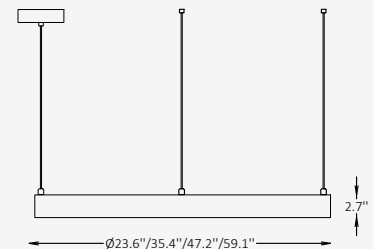

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59"
Height	2.7"
Width	1.7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	65W / 80W / 120W / 135W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE



CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> FLT Acoustic / Pendant	<input type="checkbox"/> 23 23.6" / Up↑ - 25 W, 2125 lm / Down↓ - 40 W, 3400 lm <input type="checkbox"/> 35 35.4" / Up↑ - 24 W, 2040 lm / Down↓ - 56 W, 4760 lm <input type="checkbox"/> 47 47.2" / Up↑ - 36 W, 3060 lm / Down↓ - 84 W, 7140 lm <input type="checkbox"/> 59 59" / Up↑ - 45 W, 3825 lm / Down↓ - 90 W, 7650 lm		<input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K
Light Distribution	Dimming	CRI	Profile Finish Option
<input checked="" type="checkbox"/> BUD Beam Up & Down	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input type="checkbox"/> CR8 80 <input type="checkbox"/> CR9 90	<input type="checkbox"/> ST Standard <input type="checkbox"/> RAL RAL finishes
Acoustic Fiber Finish Option	Canopy Finish Option	Cord Length	Cord Finish Option
<input type="checkbox"/> AF Acoustic fibers	<input type="checkbox"/> ST Standard <input type="checkbox"/> RAL RAL finishes	<input type="checkbox"/> L5 59" (adjustable) <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> SVW White <input type="checkbox"/> SVB Black <input type="checkbox"/> SVT Transparent
Mounting			
<input type="checkbox"/> CT Central Canopy Suspension <input type="checkbox"/> MO Multi-Point Suspension			

Project


Notes

Finishes

Acoustic fiber finishes



Standard finishes



Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

