




## GENERAL INFORMATION

KELTOR is an outdoor bollard defined by its sculpted cylindrical form and controlled accent lighting. Precision-cut openings create focused directional beams, adding depth and visual rhythm while providing functional illumination for pathways and landscape areas. Built from durable aluminum, KELTOR is available in a range of finishes, including wood-effect and metallic options, allowing it to blend naturally into modern outdoor environments. Optional integrated power outlet configurations add practical functionality for exterior applications.

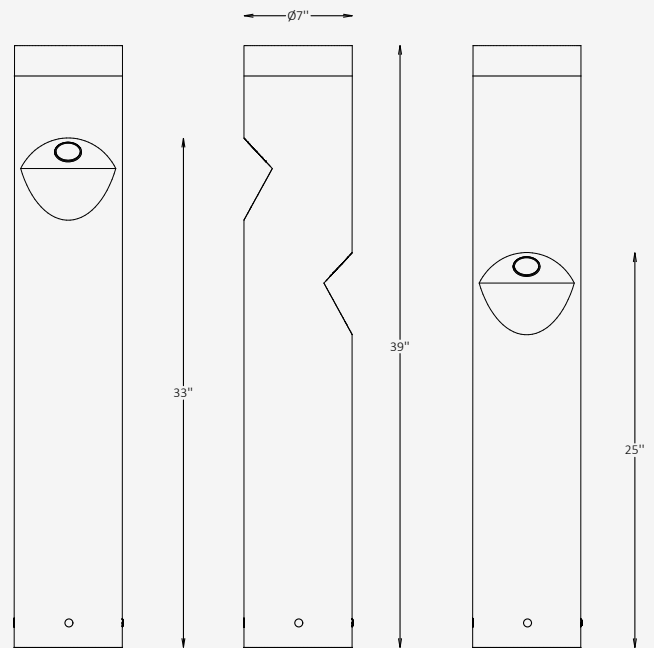

## SPECIFICATIONS

Material	Aluminum
Diffuser	N/A
Diameter	7"
Height	39"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	2 × 4W / 2 × 7W / 2 × 10W / 2 × 12W
LED Output	90 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	16° Narrow / 27° Medium / 43° Wide
IP Rating	IP 65
Warranty	5 years
Finishes	16 RAL finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Outlet Option	120V GFCI duplex receptacle with lockable weatherproof in-use cover. NEMA receptacle option, type by project requirement.

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



Project

Notes

## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> <b>KLT-B</b> Bollard	<input type="checkbox"/> <b>7</b> 7"	<input type="checkbox"/> <b>39</b> 39"	<input type="checkbox"/> <b>AL</b> Aluminum
	<input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>Cus</b> Custom on request
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>4</b> 2 × 4W / 2 x 360 lm	<input type="checkbox"/> <b>N16</b> 2 × 16° Narrow	<input type="checkbox"/> <b>NN</b> Non-Dimmable
<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>8</b> 2 × 7W / 2 x 630 lm	<input type="checkbox"/> <b>M27</b> 2 × 27° Medium	<input type="checkbox"/> <b>DM</b> 0-10V
<input type="checkbox"/> <b>35</b> 3500K	<input type="checkbox"/> <b>10</b> 2 × 10W / 2 x 900 lm	<input type="checkbox"/> <b>W43</b> 2 × 43° Wide	
<input type="checkbox"/> <b>40</b> 4000K	<input type="checkbox"/> <b>12</b> 2 × 12W / 2 x 1080 lm	<input type="checkbox"/> <b>Cus</b> Custom on request	
<input type="checkbox"/> <b>50</b> 5000K	<input type="checkbox"/> <b>Cus</b> Custom on request		
<input type="checkbox"/> <b>AM</b> Amber Light			
Body Finish Option	Cover Finish Option	Mounting	Outlet Option
<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>ST</b> Standard	<input type="checkbox"/> <b>SM</b> Surface-mounted	<input type="checkbox"/> <b>NO</b> No outlet
<input type="checkbox"/> <b>WE</b> Wood effect	<input type="checkbox"/> <b>WE</b> Wood effect	<input type="checkbox"/> <b>AB</b> Anchored Base	<input type="checkbox"/> <b>GFCI</b> 120V GFCI duplex receptacle with lockable weatherproof in- use cover
<input type="checkbox"/> <b>MC</b> Metallic	<input type="checkbox"/> <b>MC</b> Metallic		<input type="checkbox"/> <b>NEMA</b> Project-specific NEMA receptacle; type to be confirmed per project requirement
<input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>Cus</b> Custom on request		


Note: NEMA receptacle options are available upon request. Exact configuration, voltage, amperage, wiring, and cover type must be confirmed prior to production.

Project

Notes

# Finishes

## Standard finishes

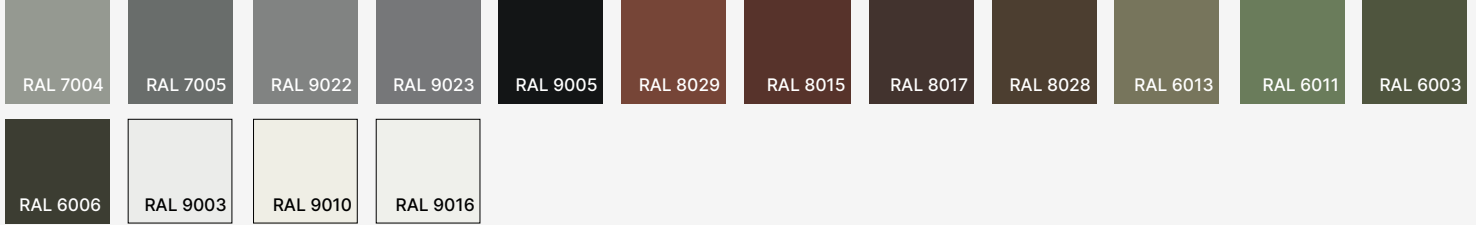

## Wood-effect finishes



## Metallic finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

