




## GENERAL INFORMATION


CIELA CIRCLE is a large-scale circular pendant designed to deliver soft, uniform illumination with a clean architectural presence. The slim aluminum profile and frosted polycarbonate diffuser create a continuous 360° ring of light that enhances the space with balanced ambient illumination. Designed for hospitality environments, commercial interiors, and feature architectural applications, CIELA CIRCLE combines minimalist geometry with high-output performance. Its wide range of diameters allows the fixture to function as both an elegant decorative centerpiece and a functional lighting solution for open interior spaces.

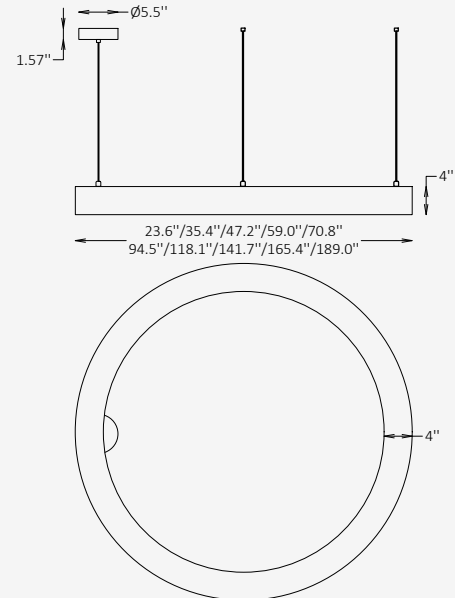

## SPECIFICATIONS

<b>Material</b>	Aluminum + Polycarbonate
<b>Diffuser</b>	Polycarbonate, Frosted
<b>Diameter</b>	23.6" / 35.4" / 47.2" / 59" / 71" / 94.5" / 118" / 141.7" / 165.4" / 189"
<b>Profile Height</b>	4"
<b>Profile Width</b>	4"
<b>Input Voltage</b>	110-277V, 50-60 Hz
<b>Light Source Type</b>	LED
<b>Power</b>	40W / 50W / 80W / 100W / 120W / 160W / 200W / 240W / 300W / 400W
<b>LED Output</b>	105 lm/W
<b>CCT</b>	3000K / 3500K / 4000K
<b>CRI</b>	80 / 90
<b>Dimming &amp; Driver</b>	Integral, 0-10V
<b>Light Distribution</b>	360°, Diffused
<b>IP Rating</b>	IP 20
<b>Warranty</b>	5 years
<b>Finishes</b>	White

## OTHER VERSIONS AVAILABLE

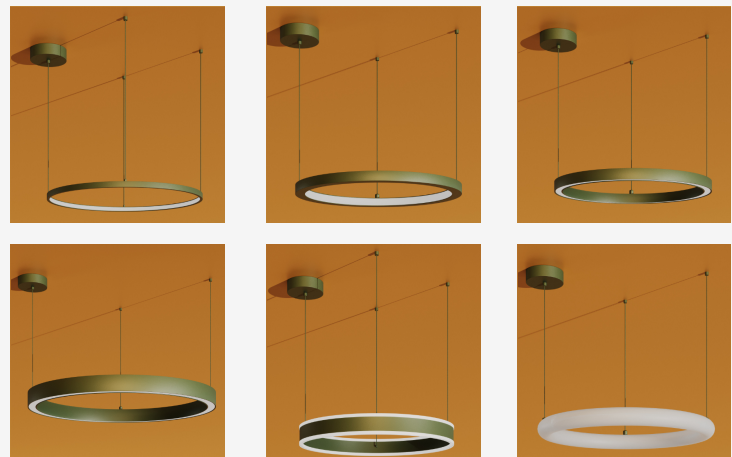

## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>CEL</b> Circle / Pendant	<input type="checkbox"/> <b>23</b> 23.6" / 40 W / 4200 lm	<input type="checkbox"/> <b>94</b> 94.5" / 160W / 16,800 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>35</b> 35.4" / 50 W / 5250 lm	<input type="checkbox"/> <b>118</b> 118" / 200W / 17,000 lm	<input type="checkbox"/> <b>35</b> 3500K
	<input type="checkbox"/> <b>47</b> 47.2" / 80 W / 8400 lm	<input type="checkbox"/> <b>147</b> 141.7" / 240W / 25,200 lm	<input type="checkbox"/> <b>40</b> 4000K
	<input type="checkbox"/> <b>59</b> 59" / 100 W / 10,500 lm	<input type="checkbox"/> <b>165</b> 165.4" / 300W / 31,500 lm	
	<input type="checkbox"/> <b>71</b> 71" / 120 W / 12,600 lm	<input type="checkbox"/> <b>189</b> 189" / 400W / 42,000 lm	
Light Distribution	Dimming	CRI	Profile Finish Option
<input checked="" type="checkbox"/> <b>LD36</b> 360°, Diffused	<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>CR8</b> 80	<input checked="" type="checkbox"/> <b>WH</b> White
	<input type="checkbox"/> <b>DM</b> 0-10V	<input type="checkbox"/> <b>CR9</b> 90	
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
<input type="checkbox"/> <b>WH</b> White	<input type="checkbox"/> <b>SVW</b> White	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension	<input type="checkbox"/> <b>L6</b> 59" (adjustable)
<input type="checkbox"/> <b>BL</b> Black	<input type="checkbox"/> <b>SVB</b> Black	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension	<input type="checkbox"/> <b>Cus</b> Custom on request
<input type="checkbox"/> <b>RAL</b> RAL Finishes		<i>*Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"</i>	

## Finishes


### Standard finishes



### RAL finishes



### Cord finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS):** RAL\_ \_ \_ \_

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

