




GENERAL INFORMATION

LUNEX SM is a surface-mounted ceiling luminaire designed to provide soft, uniform illumination with a clean architectural appearance. The frosted polycarbonate diffuser creates smooth 360° light distribution, while the low-profile circular form integrates seamlessly into contemporary interiors. Designed for residential, hospitality, educational, and commercial environments, LUNEX SM combines minimalist aesthetics with efficient lighting performance. Available in multiple diameters and output levels, the fixture serves as a versatile ambient lighting solution that delivers visual comfort and a refined contemporary presence.

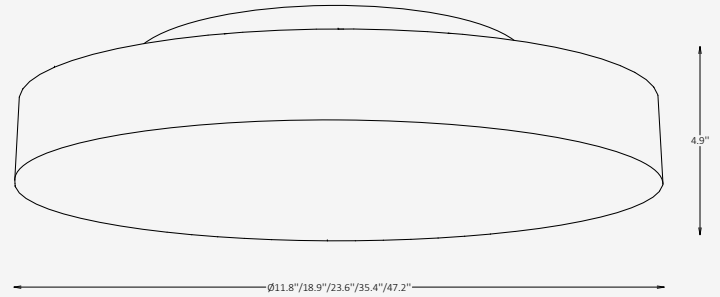

SPECIFICATIONS

Material	Metal + Polycarbonate
Diffuser	Polycarbonate, Frosted
Diameter	11.8" / 18.9" / 23.6" / 35.4" / 47.2"
Profile Height	4.9"
Input Voltage	110-277V
Light Source Type	LED
Power	15W / 25W / 40W / 90W / 150W
LED Output	105 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	360°, Diffused
IP Rating	IP 20
Warranty	5 years
Finishes	White

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens	CCT	Dimming
<input checked="" type="checkbox"/> LNX-SM Ceiling	<input type="checkbox"/> 11 11.8" / 15W / 1575 lm <input type="checkbox"/> 18 18.9" / 25W / 2625 lm <input type="checkbox"/> 23 23.6" / 40W / 4200 lm <input type="checkbox"/> 35 35.4" / 90W / 9450 lm <input type="checkbox"/> 47 47.2" / 150W / 15,750 lm	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V
CRI	Canopy Finish Option		
<input type="checkbox"/> CR8 80 <input type="checkbox"/> CR9 90	<input type="checkbox"/> ST Standard <input type="checkbox"/> RAL RAL finishes		

Finishes

Standard finishes



RAL finishes

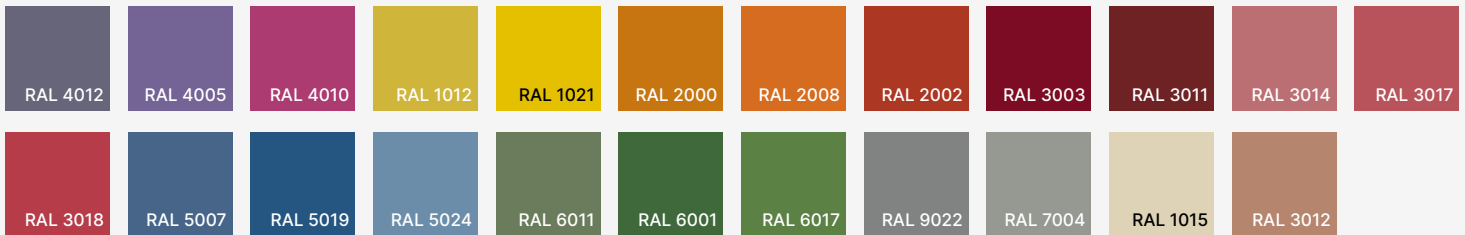

Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

