



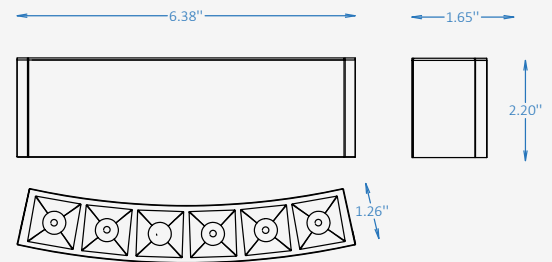

GENERAL INFORMATION


The A-CELL SHIFT module is a precision-engineered linear lighting element designed for the Modari A-Track Core magnetic track system. With a slim aluminum profile and frosted acrylic lens, it delivers controlled, high-efficiency illumination with multiple beam angles for tailored light distribution. Available in a wide range of color temperatures and finishes, A-CELL SHIFT integrates seamlessly into architectural environments, providing both performance and visual refinement in contemporary lighting compositions.

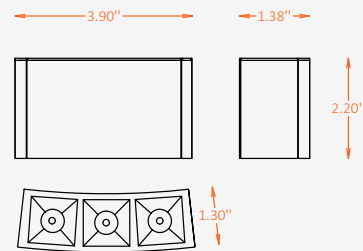

MODULE SPECIFICATIONS

Material	Aluminum
Length	3.90" / 6.38"
Width	1.30"
Height	2.2"
Input Voltage	DC 24V
Light Source Type	LED
Power	4W / 8W
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	12° / 34° / 48°
CRI	80 / 90
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

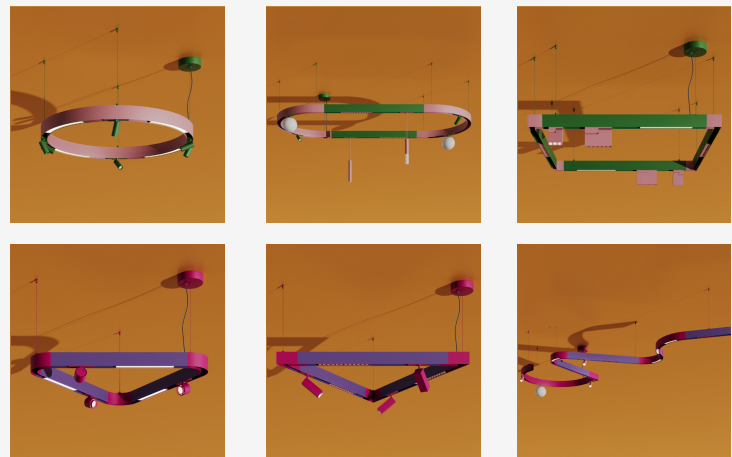

CERTIFICATION




A-Cell Shift Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Length / Wattage / Lumens	CCT
<input checked="" type="checkbox"/> CL-SF A-Cell Shift Module	<input type="checkbox"/> D24 DC 24V	<input type="checkbox"/> 4 3.9" / 4W / 300 lm	<input type="checkbox"/> 27 2700K
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 6 6.38" / 8W / 644 lm	<input type="checkbox"/> 30 3000K
			<input type="checkbox"/> 35 3500K
			<input type="checkbox"/> 40 4000K
			<input type="checkbox"/> Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
<input type="checkbox"/> B12 12°	<input type="checkbox"/> CR8 80	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> ST Standard
<input type="checkbox"/> B34 34°	<input type="checkbox"/> CR9 90	<input type="checkbox"/> DM0 0-10V	<input type="checkbox"/> WE Wood effect
<input type="checkbox"/> B48 48°		<input type="checkbox"/> DM1 1-10V	<input type="checkbox"/> MC Metallic
		<input type="checkbox"/> DL DALI	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> TR TRIAC	

A-Cell Shift Module Finishes


Standard finishes

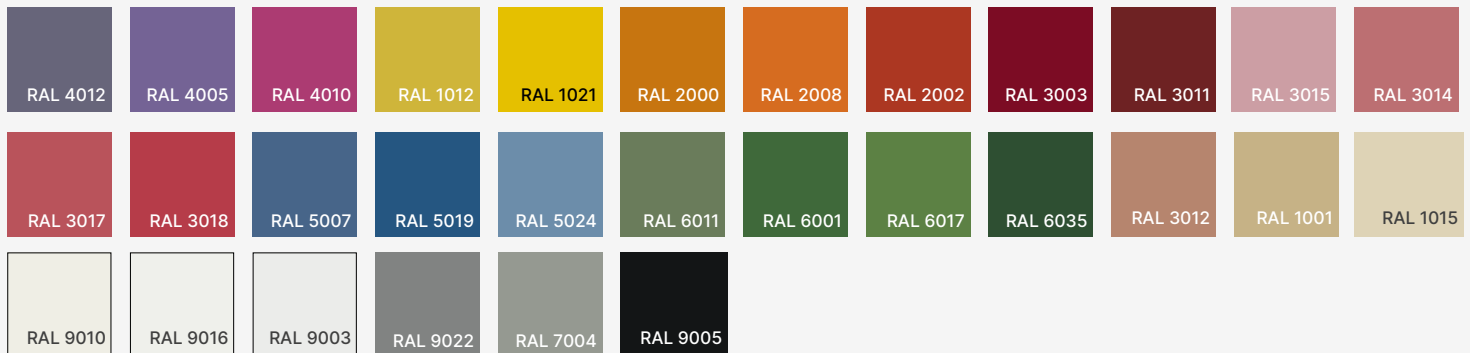

Wood-effect finishes



Metallic finishes




RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Photometric Data

A-Cell Shift 3 / 12°


12°



h(m)	E(lx)	Φ(m)
1	2963	Φ0.16
2	740	Φ0.33
3	329	Φ0.55
4	185	Φ0.66
5	118	Φ0.83

A-Cell Shift 6 / 12°


12°



h(m)	E(lx)	Φ(m)
1	6645	Φ0.17
2	1661	Φ0.34
3	738	Φ0.51
4	415	Φ0.68
5	265	Φ0.85

A-Cell Shift 3 / 34°


34°



h(m)	E(lx)	Φ(m)
1	895	Φ0.56
2	223	Φ1.13
3	99	Φ1.70
4	55	Φ2.27
5	35	Φ2.84

A-Cell Shift 6 / 34°


34°



h(m)	E(lx)	Φ(m)
1	1947	Φ0.55
2	486	Φ1.11
3	216	Φ1.67
4	121	Φ2.22
5	77	Φ2.78

A-Cell Shift 3 / 48°


48°



h(m)	E(lx)	Φ(m)
1	938	Φ0.58
2	234	Φ1.17
3	104	Φ1.76
4	58	Φ2.35
5	37	Φ2.94

A-Cell Shift 6 / 48°

48°



h(m)	E(lx)	Φ(m)
1	1999	Φ0.58
2	499	Φ1.16
3	222	Φ1.75
4	124	Φ2.33
5	79	Φ2.92