



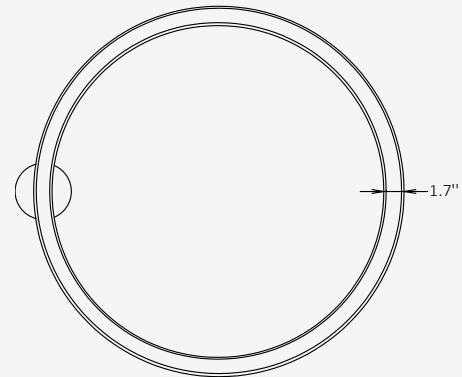

GENERAL INFORMATION

The Orbita Core Circle is a high-output architectural pendant designed to deliver powerful and balanced illumination in downlight and uplight directions. Featuring a bold, dimensional profile with precision-engineered aluminum construction, this fixture offers outstanding performance for large-scale commercial interiors, lobbies, and public spaces. Available in a range of diameters up to 197", the Core Circle supports Beam Up & Down configuration, enabling design flexibility across varied ceiling heights and lighting needs. Its refined aesthetic and clean finish options make it ideal for projects requiring both function and visual impact.

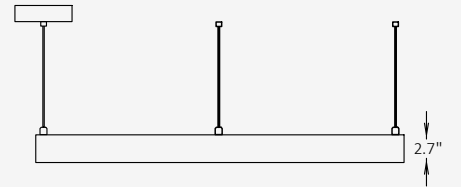


→ Ø23.6"/35.4"/47.2"/59.1"/78.7"/98.4"/118.1"/157.5"/196.9" ←

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59.1" / 78.7" / 98.4" / 118.1" / 157.5" / 196.9"
Profile Height	2.7"
Profile Width	1.7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	65W / 80W / 120W / 135W / 150W / 200W / 300W / 400W / 480W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
Circuiting	Dual-circuit, uplight and downlight separately controlled
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

OTHER VERSIONS AVAILABLE

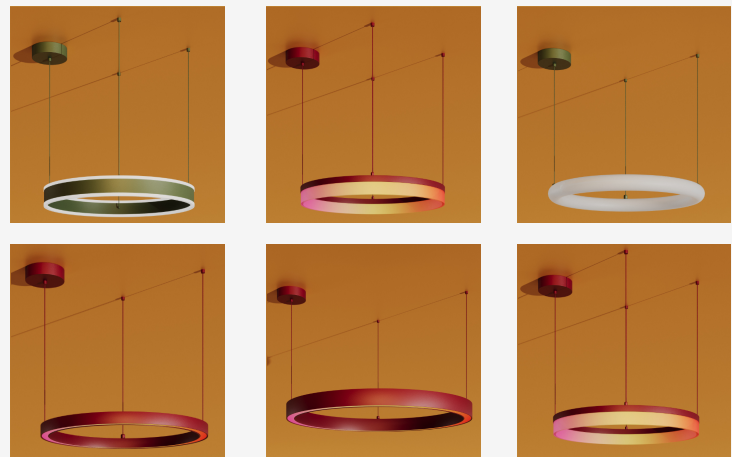

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> OTC Circle / Pendant	<input type="checkbox"/> 23 23.6" / 65 W / 3400 + 2125 lm	<input type="checkbox"/> 98 98.4" / 200 W / 12,750 + 4250 lm	<input type="checkbox"/> 30 3000K
	<input type="checkbox"/> 35 35.4" / 80 W / 4760 + 2040 lm	<input type="checkbox"/> 118 118.1" / 300 W / 17,850 + 7650 lm	<input type="checkbox"/> 35 3500K
	<input type="checkbox"/> 47 47.2" / 120 W / 7140 + 3060 lm	<input type="checkbox"/> 157 157.5" / 400 W / 25,500 + 8500 lm	<input type="checkbox"/> 40 4000K
	<input type="checkbox"/> 59 59.1" / 135 W / 7650 + 3825 lm	<input type="checkbox"/> 196 196.9" / 480 W / 28,560 + 12,240 lm	
	<input type="checkbox"/> 78 78.7" / 150 W / 8925 + 3825 lm		
Light Distribution	Dimming	CRI	Profile Finish Option
<input checked="" type="checkbox"/> BUD Beam Up & Down <small>*Standard configuration includes separate uplight and downlight circuits for independent control.</small>	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input checked="" type="checkbox"/> CR9 90	<input type="checkbox"/> SW Satin White <input type="checkbox"/> SB Satin Black <input type="checkbox"/> RAL RAL Finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
<input type="checkbox"/> WH White <input type="checkbox"/> BL Black <input type="checkbox"/> RAL RAL Finishes	<input type="checkbox"/> SVW White <input type="checkbox"/> SVB Black	<input type="checkbox"/> CT Central Canopy Suspension <input type="checkbox"/> MO Multi-Point Suspension <small>*Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"</small>	<input type="checkbox"/> L6 59" (adjustable) <input type="checkbox"/> Cus Custom on request

Finishes


Standard finishes



RAL finishes



Cord finishes



RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Project

Notes

Photometric Data

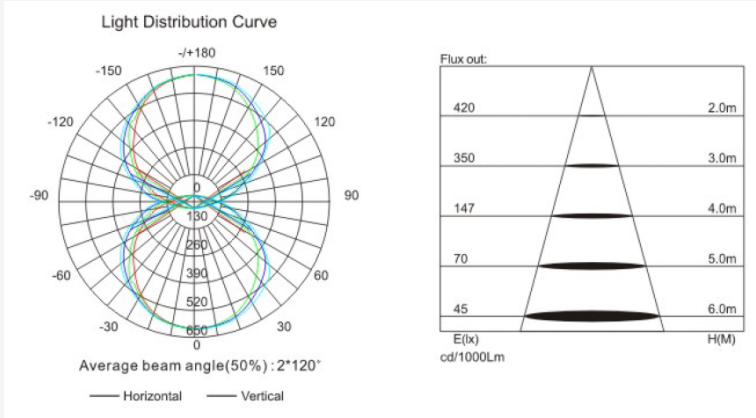

DBI MILK