




GENERAL INFORMATION


ALUNA is a decorative globe pendant available in both glass and acrylic versions, offering a clean spherical form with soft, uniform illumination. Its timeless geometry and minimalist detailing create a refined visual presence that complements a wide range of architectural and interior styles. Designed for residential interiors, hospitality environments, lounges, and feature applications, ALUNA delivers comfortable 360° diffused ambient lighting. Available in an extensive range of diameters, finishes, and light source options, the collection provides exceptional design flexibility while maintaining a simple and elegant aesthetic.

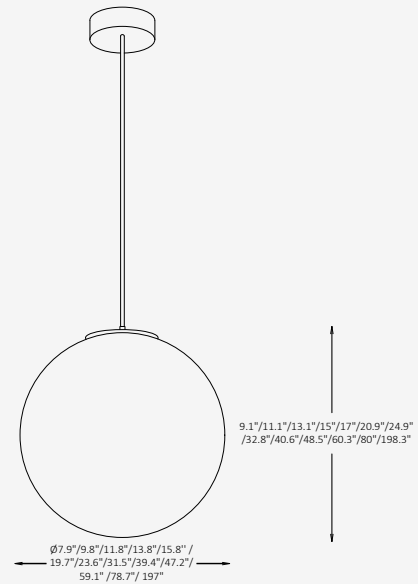

SPECIFICATIONS

Material	Glass or Acrylic + Aluminum
Glass Diameter	11.8" / 15.8"
Acrylic Diameter	7.9" / 9.8" / 11.8" / 13.8" / 15.8" / 19.7" / 23.6" / 31.5" / 39.4" / 47.2" / 59.1" / 78.7" / 197.0"
Overall Height	9.1" / 11.1" / 13.1" / 15" / 17" / 20.9" / 24.9" / 32.8" / 40.6" / 48.5" / 60.3" / 80" / 198.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED / E26 (1 x max. 60W, bulb not included)
Power	3W / 5W / 7W / 10W / 12W / 20W / 30W / 50W / 80W / 110W / 175W / 300W / 480W / (available for LED version only)
LED Output	120 m/W / 90 lm/W (available for LED version only)
CCT	2700K / 3000K / 3500K / 4000K (available for LED version only*)
Dimming & Driver	Integral, 0-10V (available only for LED version*)
CRI	90 (available for LED version only*)
Light Distribution	360° Soft Diffused Ambient
IP Rating	IP20
Warranty	5 years
Finishes	34 RAL finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

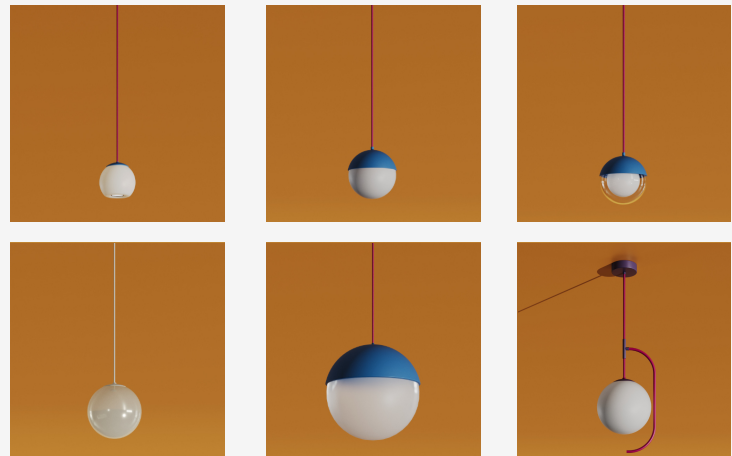

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Height / Light Source		CCT	
<input checked="" type="checkbox"/> ALN Pendant	Glass Version <input type="checkbox"/> 11-LW 11.8" / 13.1" / LED, 5W / 600 lm <input type="checkbox"/> 11-HG 11.8" / 13.1" / LED, 7W / 840 lm <input type="checkbox"/> 15-LW 15.8" / 17" / LED, 5W / 600 lm <input type="checkbox"/> 15-HG 15.8" / 17" / LED, 7W / 840 lm <input type="checkbox"/> 60 E26 / 1 x max. 60W <input type="checkbox"/> Cus Custom on request	Acrylic Version <input type="checkbox"/> 7 7.9" / 9.1" / LED, 3W / 270 lm <input type="checkbox"/> 9 9.8" / 11.1" / LED, 5W / 450 lm <input type="checkbox"/> 11 11.8" / 13.1" / LED, 7W / 630 lm <input type="checkbox"/> 13 13.8" / 15" / LED, 10W / 900 lm <input type="checkbox"/> 15 15.8" / 17" / LED, 12W / 1,080 lm <input type="checkbox"/> 19 19.7" / 20.9" / LED, 20W / 1,800 lm <input type="checkbox"/> 23 23.6" / 24.9" / LED, 30W / 2,700 lm <input type="checkbox"/> 31 31.5" / 32.8" / LED, 50W / 4,500 lm <input type="checkbox"/> 39 39.4" / 40.6" / LED, 80W / 7,200 lm <input type="checkbox"/> 47 47.2" / 48.5" / LED, 110W / 9,900 lm <input type="checkbox"/> 59 59.1" / 60.3" / LED, 175W / 15,750 lm <input type="checkbox"/> 78 78.7" / 80" / LED, 300W / 27,000 lm <input type="checkbox"/> 197 197" / 198.3" / LED, 480W / 43,200 lm <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> Cus Custom on request <i>Available for LED version only*</i>	
	Dimming	Glass Type	Metal Cap Finish Option	Canopy Finish Option
	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V <i>Available for LED version only*</i>	<input type="checkbox"/> CL Clear <input type="checkbox"/> FR Frosted <input type="checkbox"/> Cus Custom on request <i>Glass type options apply to glass version only*</i>	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request
	Cord Length	Cord Finish Option	Mounting	
	<input type="checkbox"/> L59 59" (adjustable) <input type="checkbox"/> L118 118" (adjustable) <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> SVC Standard Vinyl <input type="checkbox"/> DB Decorative Braided <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> SP Single-Point Pendant <input type="checkbox"/> MS Multi-Point Suspension <input type="checkbox"/> CS Custom Structural Suspension	SP mounting is recommended for Ø7.9"–Ø23.6". MS mounting is recommended for Ø31.5"–Ø47.2". CS mounting is required for Ø59.1" and larger. Final mounting configuration must be confirmed based on fixture weight, ceiling condition, and project requirements.

Project


Notes

Finishes

Standard finishes

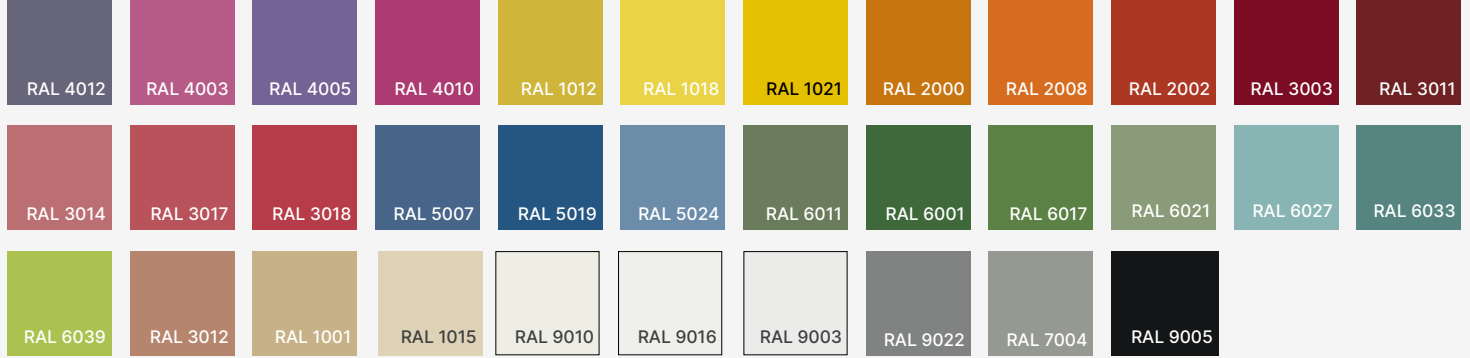


Metallic finishes



Cord finishes

Standard Vinyl



Decorative Braided



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

