




GENERAL INFORMATION


A-LOOP POINT SHIFT is an adjustable spotlight module for the MODARI magnetic track system, designed to provide precise accent illumination within flexible lighting layouts. Its compact circular form integrates smoothly with both curved and linear track configurations. Designed for residential, hospitality, retail, gallery, and commercial interiors, the module can be repositioned along the track to highlight artwork, merchandise, architectural details, or focal points. Available in multiple beam angles and finishes, it combines directional control with clean MODARI system integration.

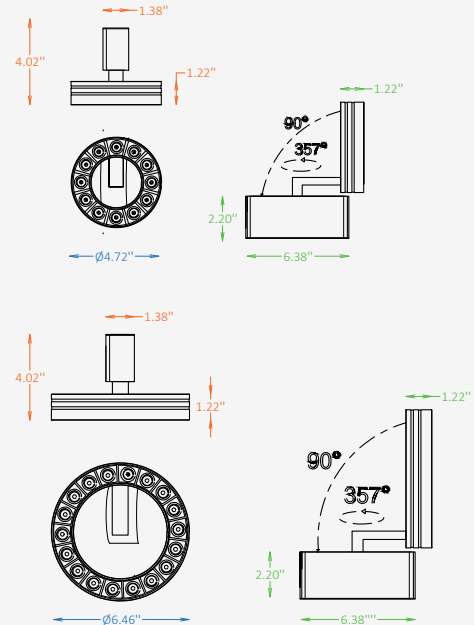

MODULE SPECIFICATIONS

Material	Aluminum
Diameter	4.72" / 6.46"
Height	1.22"
Input Voltage	DC 24V
Light Source Type	LED
Power	12W / 18W
CCT	2700K / 3000K / 3500K / 4000K
CRI	80 / 90
Beam Angle	24° / 34° / 48°
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

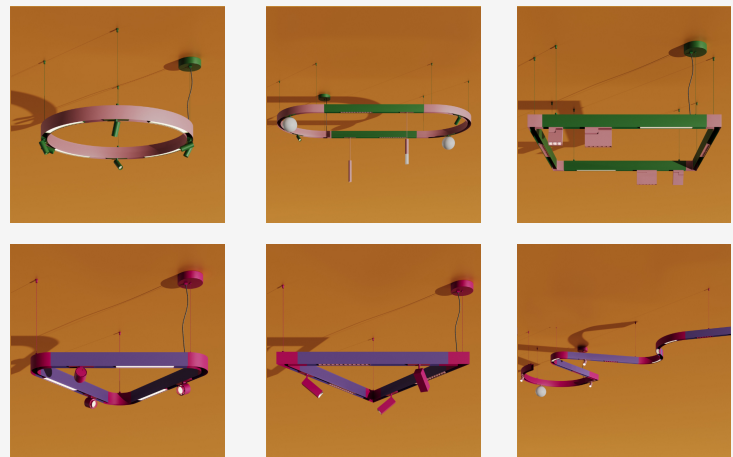

CERTIFICATION




A-Loop Point Shift Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Height / Wattage / Lumens	CCT
<input checked="" type="checkbox"/> LPT-SF A-Loop Point Shift Module	<input type="checkbox"/> D24 DC 24V	<input type="checkbox"/> 4 4.72" / 1.22" / 12W / 950 lm	<input type="checkbox"/> 27 2700K
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 6 6.46" / 1.22" / 18W / 1562 lm	<input type="checkbox"/> 30 3000K
			<input type="checkbox"/> 35 3500K
			<input type="checkbox"/> 40 4000K
			<input type="checkbox"/> Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
<input type="checkbox"/> B20 20°	<input type="checkbox"/> CR8 80	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> ST Standard
<input type="checkbox"/> B34 34°	<input type="checkbox"/> CR9 90	<input type="checkbox"/> DM0 0-10V	<input type="checkbox"/> WE Wood effect
<input type="checkbox"/> B48 48°		<input type="checkbox"/> DM1 1-10V	<input type="checkbox"/> MC Metallic
		<input type="checkbox"/> DL DALI	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> TR TRIAC	

A-Loop Point Shift Module Finishes


Standard finishes

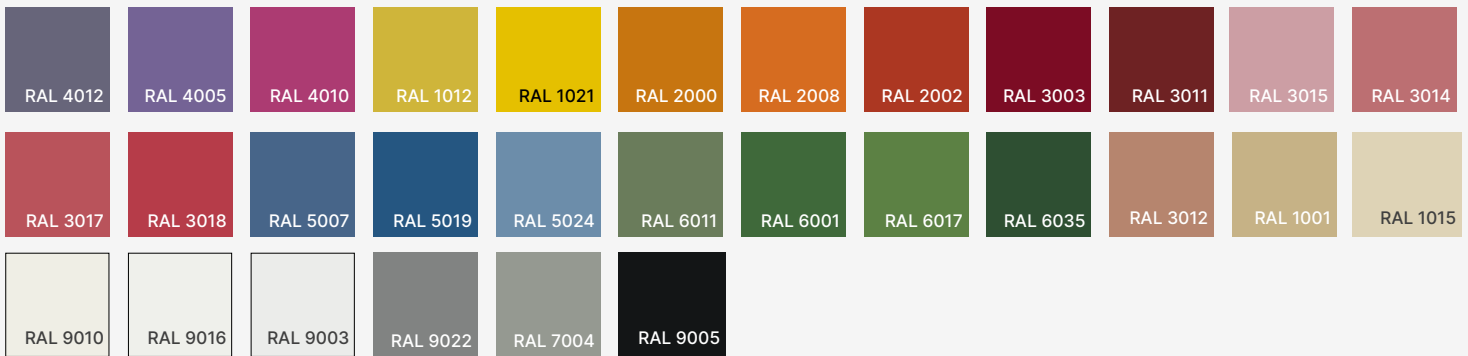

Wood-effect finishes



Metallic finishes




RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _


All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).




Photometric Data


A-Loop Point Shift 4 / 20°

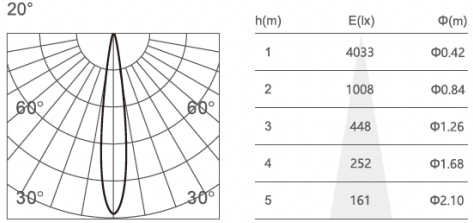


A-Loop Point Shift 4 / 34°

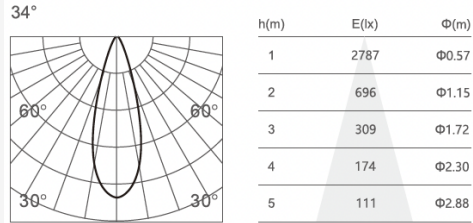


A-Loop Point Shift 4 / 48°

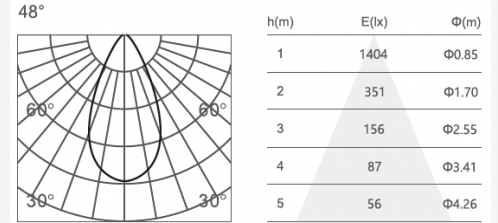

A-Loop Point Shift 6 / 20°

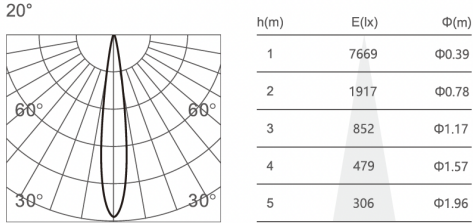

A-Loop Point Shift 6 / 34°

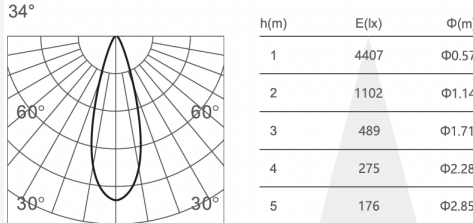

A-Loop Point Shift 6 / 48°

