



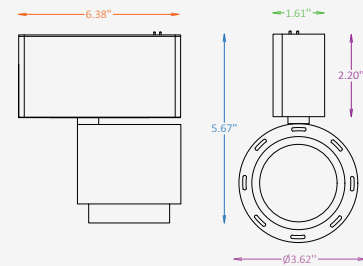

GENERAL INFORMATION


A-VUE SHIFT is an adjustable spotlight module for the MODARI magnetic track system, designed to deliver precise accent illumination within flexible architectural lighting layouts. Its compact form and multiple beam angle options allow light to be directed accurately toward architectural features, artwork, displays, and focal points. Designed for residential, hospitality, retail, gallery, and commercial interiors, A-VUE SHIFT can be easily repositioned within the magnetic track system to adapt to changing lighting requirements. The module combines directional performance, compact proportions, and seamless integration within the MODARI platform.

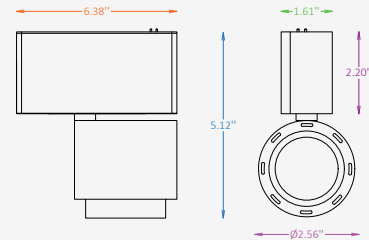

MODULE SPECIFICATIONS

| | |
|-------------------|--|
| Material | Aluminum |
| Diameter | 2.56" / 3.62" |
| Height | 2.92" / 3.47" |
| Input Voltage | DC 24V |
| Light Source Type | LED |
| Power | 8W / 15W |
| CCT | 2700K / 3000K / 3500K / 4000K |
| CRI | 80 / 90 |
| Beam Angle | 10° / 20° / 30° |
| Dimming | Non-Dim / 0-10V / 1-10V / DALI / TRIAC |
| IP Rating | IP 20 |
| Warranty | 5 years |
| Finishes | 30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request* |

OTHER VERSIONS AVAILABLE

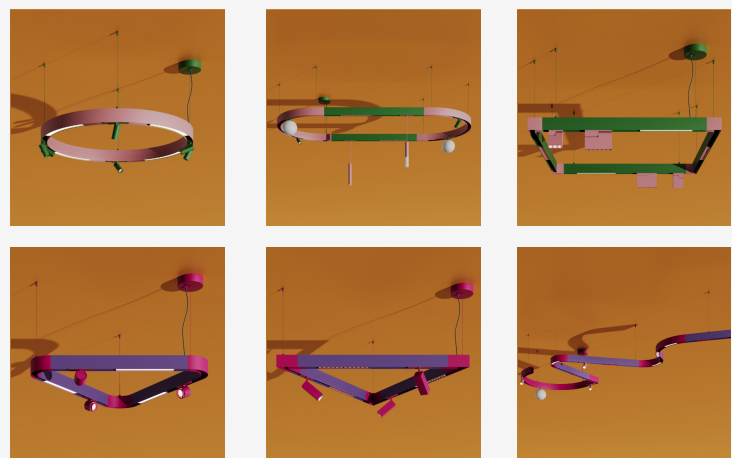

CERTIFICATION




A-Vue Shift Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code | Voltage | Diameter / Height / Wattage / Lumens | CCT |
|---|--|---|--|
| <input checked="" type="checkbox"/> VUE-SF A-Vue Shift Module | <input type="checkbox"/> D24 DC 24V | <input type="checkbox"/> 2 2.56" / 2.92" / 8W / 251 lm | <input type="checkbox"/> 27 2700K |
| | <input type="checkbox"/> Cus Custom on request | <input type="checkbox"/> 3 3.62" / 3.47" / 15W / 481 lm | <input type="checkbox"/> 30 3000K |
| | | | <input type="checkbox"/> 35 3500K |
| | | | <input type="checkbox"/> 40 4000K |
| | | | <input type="checkbox"/> Cus Custom on request |
| Beam Angle | CRI | Dimming | Finish Option |
| <input type="checkbox"/> B10 10° | <input type="checkbox"/> CR8 80 | <input type="checkbox"/> NN Non-Dimmable | <input type="checkbox"/> ST Standard |
| <input type="checkbox"/> B20 20° | <input type="checkbox"/> CR9 90 | <input type="checkbox"/> DM0 0-10V | <input type="checkbox"/> WE Wood effect |
| <input type="checkbox"/> B30 30° | | <input type="checkbox"/> DM1 1-10V | <input type="checkbox"/> MC Metallic |
| | | <input type="checkbox"/> DL DALI | <input type="checkbox"/> Cus Custom on request |
| | | <input type="checkbox"/> TR TRIAC | |

A-Vue Shift Module Finishes


Standard finishes

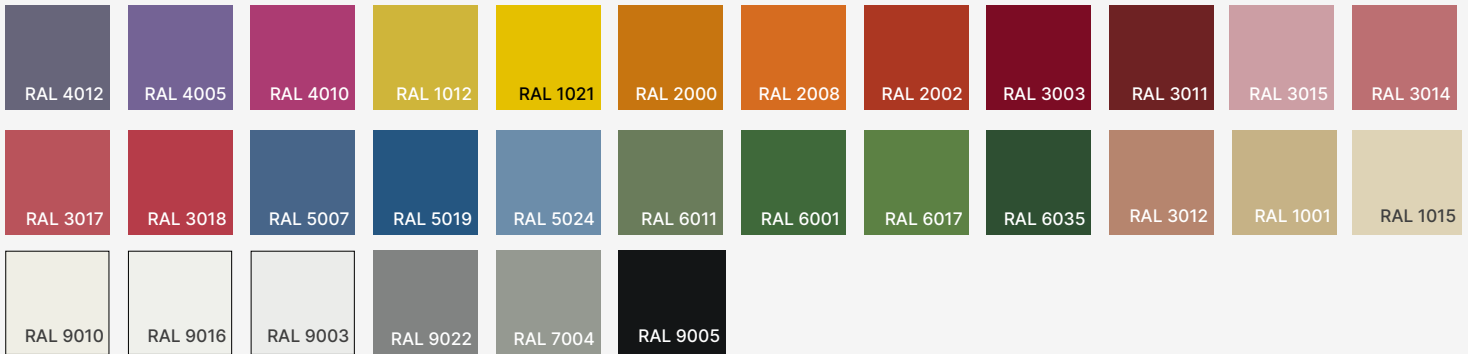

Wood-effect finishes



Metallic finishes




RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Photometric Data

A-Vue Shift 2 / 10°


10°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 4109 | Φ0.20 |
| 2 | 1027 | Φ0.40 |
| 3 | 456 | Φ0.61 |
| 4 | 256 | Φ0.81 |
| 5 | 164 | Φ1.02 |

A-Vue Shift 2 / 20°


20°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 2805 | Φ0.27 |
| 2 | 701 | Φ0.55 |
| 3 | 311 | Φ0.82 |
| 4 | 175 | Φ1.10 |
| 5 | 112 | Φ1.37 |

A-Vue Shift 2 / 30°


30°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 645 | Φ0.58 |
| 2 | 161 | Φ1.16 |
| 3 | 71 | Φ1.74 |
| 4 | 40 | Φ2.32 |
| 5 | 25 | Φ2.91 |

A-Vue Shift 3 / 10°


10°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 9750 | Φ0.20 |
| 2 | 2437 | Φ0.40 |
| 3 | 1083 | Φ0.60 |
| 4 | 609 | Φ0.80 |
| 5 | 390 | Φ1.00 |

A-Vue Shift 3 / 20°


20°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 6022 | Φ0.25 |
| 2 | 1505 | Φ0.50 |
| 3 | 669 | Φ0.75 |
| 4 | 376 | Φ1.00 |
| 5 | 240 | Φ1.25 |

A-Vue Shift 3 / 30°

30°



| h(m) | E(lx) | Φ(m) |
|------|-------|-------|
| 1 | 2204 | Φ0.39 |
| 2 | 551 | Φ0.79 |
| 3 | 244 | Φ1.19 |
| 4 | 137 | Φ1.59 |
| 5 | 88 | Φ1.99 |