




GENERAL INFORMATION


The SLYTE is a contemporary architectural bollard defined by its sculpted asymmetrical form and warm, forward-projected illumination, creating both visual elegance and refined pathway guidance. Crafted from extruded aluminum with a recessed light chamber, it delivers controlled Type III forward-asymmetric distribution ideal for landscapes, entryways, and pedestrian environments. With multiple heights, color temperatures, and finish options, SLYTE offers a versatile, design-driven solution for exterior spaces seeking a balance of aesthetics, performance, and durability.

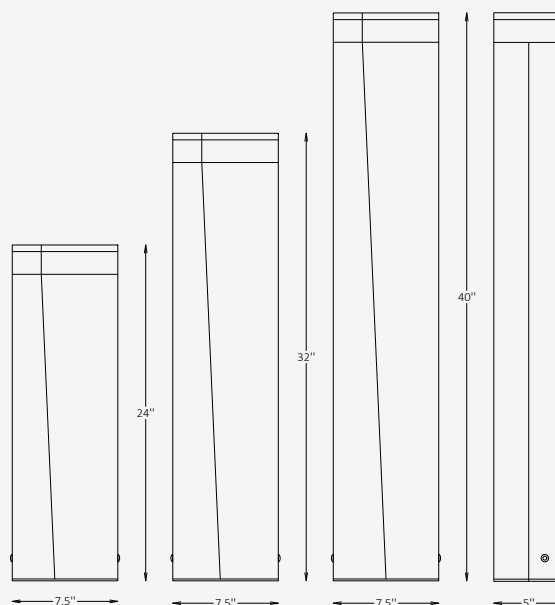

SPECIFICATIONS

Material	Extruded Aluminum
Lens	PMMA
Height	24" / 32" / 40"
Length	7.5"
Width	5"
Light Source Type	LED
Power	9W / 18W / 25W
Input Voltage	110-277V, 50-60 Hz
LED Output	90 lm/W
CCT	2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Type III, Forward Asymmetric
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE

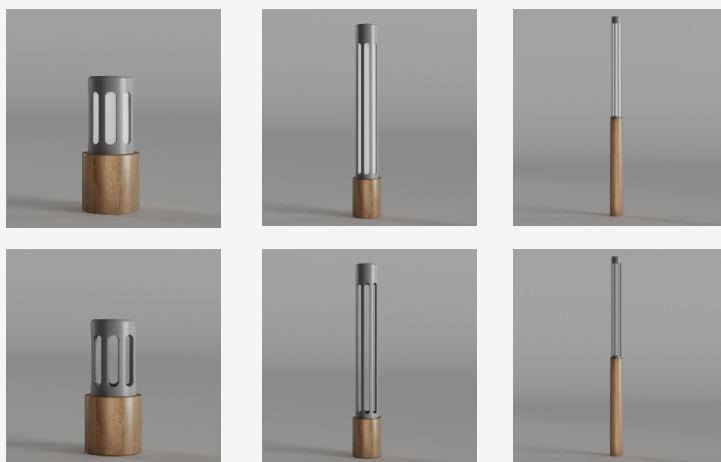

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height	Material	CCT
☒ SLT Bollard	☐ 24 24" ☐ 32 32" ☐ 40 40" ☐ Cus Custom on request	☐ AL Extruded Aluminum ☐ Cus Custom on request	☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ 50 5000K
Wattage / Lumens	Light Distribution	Dimming	Interior Panel Finish Option
☐ 8 9 W / 810 lm ☐ 16 18 W / 1620 lm ☐ 22 25 W / 2250 lm ☐ Cus Custom on request	☒ LD3 Type III Forward Asymmetric	☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request
Main Body Finish Option	Mounting		
☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request	☒ AB Anchored Base		

Finishes

Standard finishes

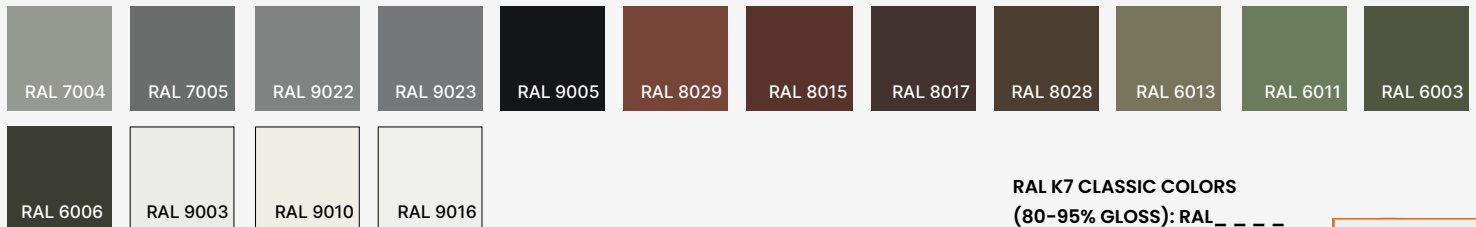

RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes



Metallic finishes




Project

Notes

Bolt Patterns

for Surface-mounted Installation

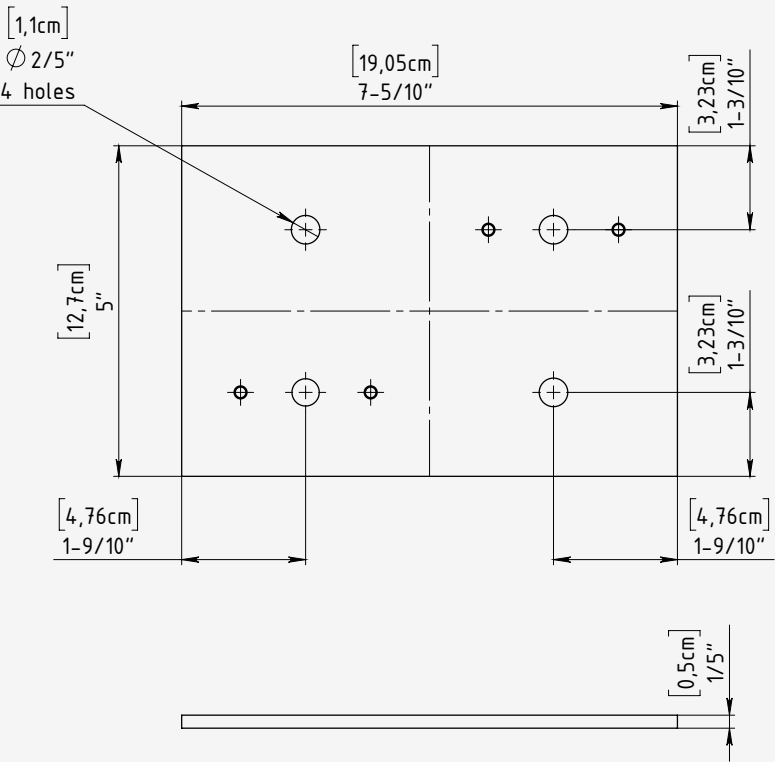

Mounting Type	Surface-mounted
Base Plate Material	Stainless Steel
Bolt Mounting Circle	$\varnothing$: 4-7/10"
Number of Anchor Bolt	4 equally holes (90° apart)
Bolt Size	1/4"-20 x 3 1/4" concrete anchor bolt

- Installation Notes:
- Use a manufacturer-supplied base plate to position anchor bolts accurately.
 - Ensure bolts are embedded vertically and aligned to avoid fixture tilt.
 - Grouting under the base plate is recommended for leveling and load distribution.
 - Allow clearance for wiring through the center opening and access to bolt heads if concealed.