




## GENERAL INFORMATION

PLIN is an outdoor bollard luminaire defined by a clean cylindrical form and a durable die-cast aluminum body with a clear acrylic diffuser. The minimalist design delivers a balanced visual presence while ensuring long-lasting performance in outdoor environments. Its refined geometry integrates naturally into contemporary architectural and landscape settings. Designed to provide uniform 360° symmetrical illumination, PILL is well suited for pathways, walkways, gardens, and public outdoor spaces where reliable and visually comfortable lighting is required.

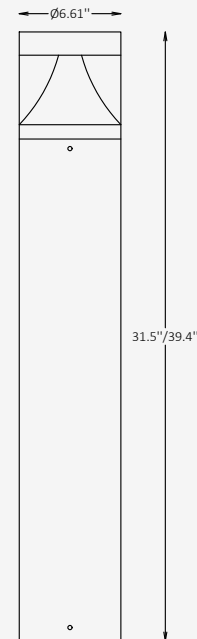

## SPECIFICATIONS

Material	Die-cast aluminium + PMMA
Lens	Clear, Acrylic
Diameter	6.6"
Total Height	31.5" / 39.4"
Light Source Type	LED
Power	20W / 25W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	70 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V / PWM / DALI
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> <b>PLN-B</b> Bollard	<input checked="" type="checkbox"/> <b>6</b> 6.6"	<input type="checkbox"/> <b>31</b> 31.5" <input type="checkbox"/> <b>39</b> 39.4"	<input checked="" type="checkbox"/> <b>AL</b> Die-cast aluminium
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> <b>22</b> 2200K	<input type="checkbox"/> <b>14</b> 20 W / 1400 lm	<input checked="" type="checkbox"/> <b>LD5</b> Type V 360° symmetrical light distribution	<input type="checkbox"/> <b>NN</b> Non-Dimmable
<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>17</b> 25 W / 1750 lm		<input type="checkbox"/> <b>DM</b> 0-10V
<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>21</b> 30 W / 2100 lm		<input type="checkbox"/> <b>PWM</b> PWM
<input type="checkbox"/> <b>40</b> 4000K			<input type="checkbox"/> <b>DL</b> DALI
<input type="checkbox"/> <b>50</b> 5000K			
Appliance Class	Body Finish Option	Mounting	
<input type="checkbox"/> <b>AC-I</b> Class I	<input checked="" type="checkbox"/> <b>RAL 9005</b> RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> <b>SM</b> Surface-mounted	
<input type="checkbox"/> <b>AC-II</b> Class II			

## Finishes

### Standard finishes



RAL 9005