

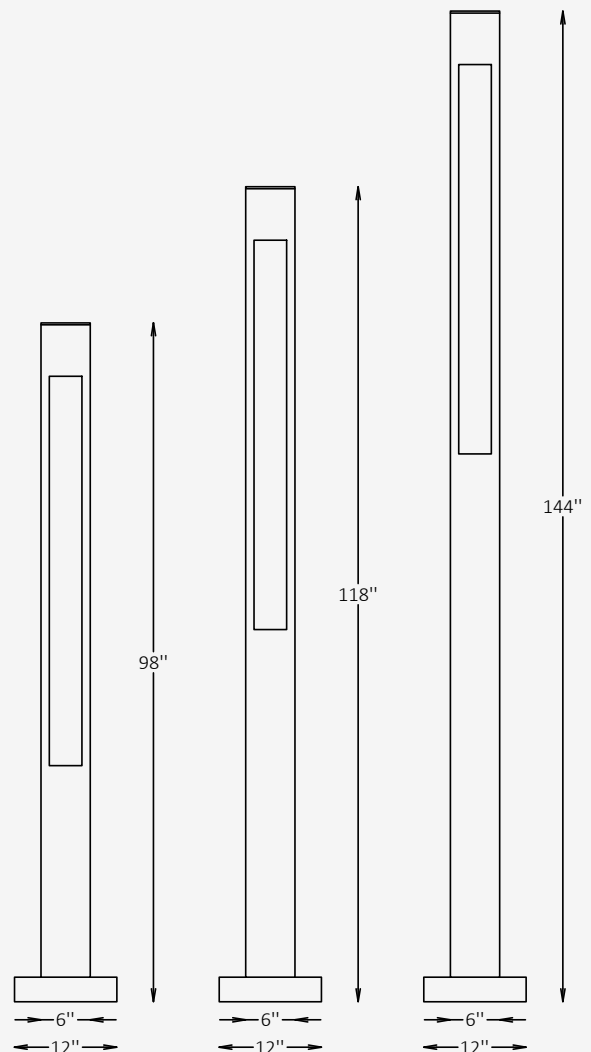


GENERAL INFORMATION

ALTIS C is a vertical lighting column defined by its clean architectural form and precise light control. The slender structure integrates linear light elements within a durable aluminum body, creating a strong yet minimal presence in outdoor environments. Designed to deliver controlled directional illumination, ALTIS C offers multiple beam angle options, allowing the light to be tailored for pathways, plazas, and large-scale architectural applications. Its clear glass elements enhance visual clarity while maintaining performance, and its robust construction ensures long-term reliability in exterior conditions. Combining functional lighting with a refined geometric identity, ALTIS C acts as both an illumination tool and an architectural feature within the space.

SPECIFICATIONS

Material	Aluminum
Lens	Clear tempered glass
Length / Width	6" x 6"
Total Height	98" / 118" / 144"
Base Height	34.25" / 54" / 79.5"
Light Source Type	LED
Power	20W / 28W / 42W / 48W / 60W / 70W / 80W / 90W
Input Voltage	110-277V, 50-60 Hz
LED Output	80 lm/W
CCT	3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	20° / 45° / 75°
IP Rating	IP 66
Warranty	5 years
Finishes	16 standard finishes
Operating Temp.	-40°C to +50°C (-40°F to +122°F)



CERTIFICATION

















Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width	Height	Material
☒ LTS-C Column	☒ 6 6" x 6"	☐ 98 98" ☐ 118 118" ☐ 144 144"	☒ AL Aluminum
CCT	Wattage / Lumens	Light Distribution	Dimming
☐ 30 3000K ☐ 40 4000K ☐ 50 5000K	☐ 20 20W / 1600 lm ☐ 28 28W / 2000 lm ☐ 42 42W / 2500 lm ☐ 48 48W / 2800 lm ☐ 60 60W / 3500 lm ☐ 70 70W / 4000 lm ☐ 80 80W / 4500 lm ☐ 90 90W / 5000 lm	☐ LD-EN Symmetric Extra Narrow (20°) ☐ LD-N Symmetric Narrow (45°) ☐ LD-W Symmetric Wide (75°)	☐ NN Non-Dimmable ☐ DM 0-10V
Body Finish Option	Mounting		
☐ ST Standard	☒ AB Anchored Base		

Finishes

Standard finishes

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

