




GENERAL INFORMATION

TIDON is a slender outdoor bollard luminaire defined by its cylindrical silhouette and softly contoured head, creating a balanced and timeless architectural presence. The stainless-steel body and clear diffuser emphasize material clarity while ensuring durability in demanding exterior environments. Designed to provide uniform ambient illumination with a symmetrical Type V, 360° light distribution, TIDON is well suited for pathways, open landscapes, and perimeter lighting where consistent coverage, visual comfort, and a refined contemporary character are required.

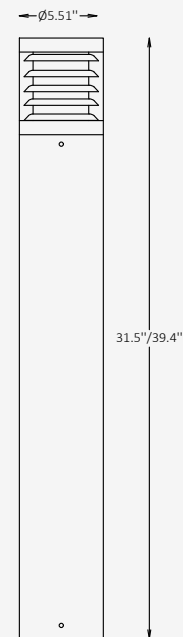

SPECIFICATIONS

Material	316 stainless steel + PMMA
Lens	Clear, Acrylic
Diameter	5.5
Total Height	31.5" / 39.4"
Light Source Type	LED
Power	15W / 20W
Input Voltage	110-277V, 50-60 Hz
LED Output	100 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
IK Rating	IK 08
Warranty	1 years
Finishing	Silver Smooth
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> TDN-B Bollard	<input checked="" type="checkbox"/> 5 5.5"	<input type="checkbox"/> 31 31.5" <input type="checkbox"/> 39 39.4"	<input checked="" type="checkbox"/> SS 316 Stainless Steel
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K	<input type="checkbox"/> 15 15 W / 1500 lm	<input checked="" type="checkbox"/> LD5 Type V	<input type="checkbox"/> NN Non-Dimmable
<input type="checkbox"/> 27 2700K	<input type="checkbox"/> 20 20 W / 2000 lm	360° symmetrical light distribution	<input type="checkbox"/> DM 0-10V
<input type="checkbox"/> 30 3000K			
<input type="checkbox"/> 40 4000K			
<input type="checkbox"/> 50 5000K			
Appliance Class	Body Finish Option	Mounting	
<input type="checkbox"/> AC-I Class I	<input checked="" type="checkbox"/> SL Silver Smooth	<input checked="" type="checkbox"/> SM Surface-mounted	
<input type="checkbox"/> AC-II Class II			

Finishes

Standard finishes

