




## GENERAL INFORMATION


NODEX RUST is an outdoor bollard defined by its sharp, architectural form and directional light expression. The asymmetrical head design creates a controlled downward illumination, delivering focused light while minimizing glare and light spill. Crafted from durable metal with a rust-effect finish, NODEX RUST introduces a warm, natural texture that integrates seamlessly into landscape and architectural environments. Designed for pathways, gardens, and perimeter lighting, the fixture combines functional performance with a strong visual identity, acting as both a lighting element and a sculptural feature within the space.

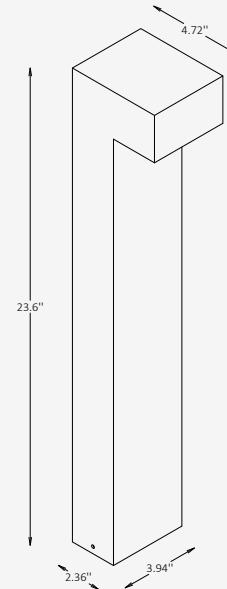

## SPECIFICATIONS

|                    |                                  |
|--------------------|----------------------------------|
| Material           | Metal                            |
| Lens               | Acrylic                          |
| Height             | 23.6"                            |
| Length             | 3.94"                            |
| Width              | 2.36"                            |
| Light Source Type  | LED                              |
| Power              | 5W                               |
| Input Voltage      | 110-277V, 50-60 Hz               |
| LED Output         | 120 lm/W                         |
| CCT                | 3000K / 4000K / 6000K            |
| CRI                | 80                               |
| Dimming & Driver   | Integral, 0-10V                  |
| Light Distribution | Type V – symmetrical, downward   |
| IP Rating          | IP 65                            |
| Warranty           | 5 years                          |
| Finishing          | Rust Effect                      |
| Operating Temp.    | -40°C to +50°C (-40°F to +122°F) |

## OTHER VERSIONS AVAILABLE

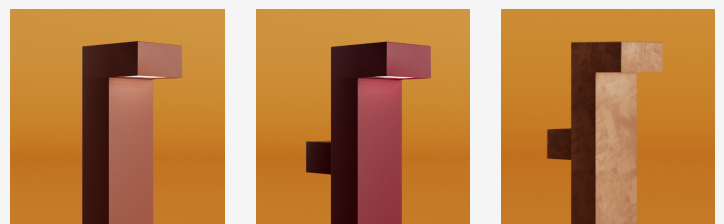

## CERTIFICATION



Project

Notes

## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code   | Height / Length / Width   | Material  | CCT   |
|--|---|---|---|
| <input checked="" type="checkbox"/> <b>NDX-R</b><br>Bollard      | <input checked="" type="checkbox"/> <b>23</b><br>23.6" / 3.94" / 2.36"              | <input checked="" type="checkbox"/> <b>ML</b><br>Metal  | <input type="checkbox"/> <b>30</b><br>3000K<br><input type="checkbox"/> <b>40</b><br>4000K<br><input type="checkbox"/> <b>60</b><br>6000K |
| Wattage / Lumens   | Light Distribution  | Dimming   | Body Finish Option  |
| <input checked="" type="checkbox"/> <b>6</b><br>5 W / 600 lm     | <input checked="" type="checkbox"/> <b>LD5</b><br>Type V – symmetrical,<br>downward | <input type="checkbox"/> <b>NN</b><br>Non-Dimmable<br><input type="checkbox"/> <b>DM</b><br>0-10V | <input checked="" type="checkbox"/> <b>REF</b><br>Rust Effect   |
| Mounting   |   |   |   |
| <input checked="" type="checkbox"/> <b>SM</b><br>Surface-mounted |   |   |   |

## Finishes

