




GENERAL INFORMATION


PARK is an architectural outdoor bollard luminaire defined by its bold cantilevered form and clear directional intent. The solid stainless-steel body and sharp horizontal overhang create a confident, sculptural presence while emphasizing durability and material integrity. Designed to deliver controlled, downward illumination with a symmetrical Type V distribution, PARK is ideal for pathways, public spaces, and landscape applications where clear visual guidance, glare control, and a strong contemporary identity are required.

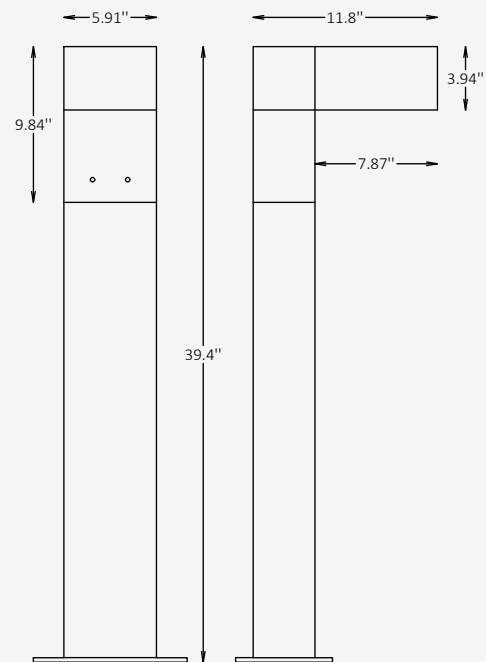

SPECIFICATIONS

Material	Aluminium + PMMA
Lens	Acrylic
Total Height	39.4"
Length	5.91"
Light Source Type	LED
Power	20W / 25W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	110 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 66
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE

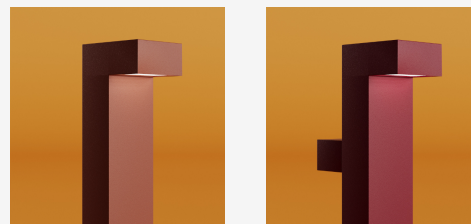

CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length	Material	CCT
<input checked="" type="checkbox"/> TDN-B Bollard	<input checked="" type="checkbox"/> 23 39.4" / 5.91"	<input checked="" type="checkbox"/> AL Aluminium	<input type="checkbox"/> 22 2200K
			<input type="checkbox"/> 27 2700K
			<input type="checkbox"/> 30 3000K
			<input type="checkbox"/> 40 4000K
			<input type="checkbox"/> 50 5000K
Wattage / Lumens	Light Distribution	Dimming	Appliance Class
<input type="checkbox"/> 22 20 W / 2200 lm	<input checked="" type="checkbox"/> LD5 Type V – symmetrical, downward	<input type="checkbox"/> NN Non-Dimmable	<input checked="" type="checkbox"/> AC-I Class I
<input type="checkbox"/> 27 25 W / 2750 lm		<input type="checkbox"/> DM 0-10V	
<input type="checkbox"/> 33 30 W / 3300 lm			
Body Finish Option	Mounting		
<input checked="" type="checkbox"/> RAL 9005 RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> SM Surface-mounted		

Finishes

Standard finishes

RAL 9005