




GENERAL INFORMATION


BRIQ RUST B is an outdoor bollard defined by its clean, geometric form and balanced light output. The fixture features a diffused top section that delivers a uniform 360° illumination, creating a soft and welcoming ambient glow. Designed for pathways, gardens, and architectural landscapes, BRIQ RUST B provides consistent visibility while minimizing glare. Its rust-effect metal body introduces a warm, natural texture that integrates seamlessly with outdoor materials, combining durability with a refined aesthetic. Both functional and visually grounded, the fixture serves as a subtle architectural element within the space.

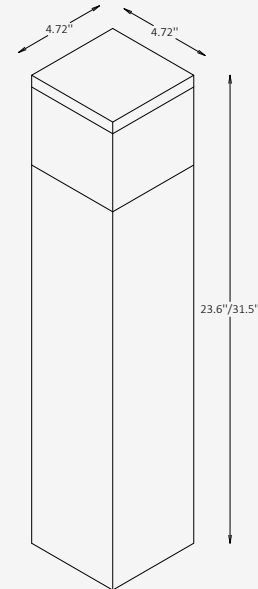

SPECIFICATIONS

Material	Metal
Lens	Acrylic
Height	23.6" / 31.5"
Length	4.72"
Width	4.72"
Light Source Type	LED
Power	5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical
IP Rating	IP 65
Warranty	5 years
Finishing	Rust Effect
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE

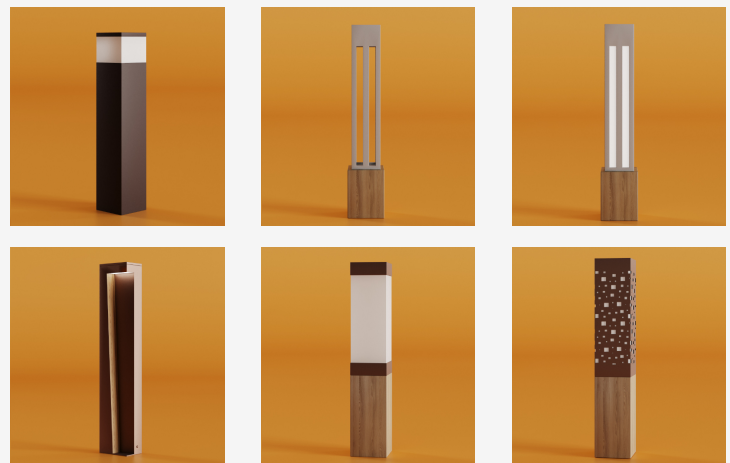

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height	Material	CCT
<input checked="" type="checkbox"/> BRQR-B Bollard	<input type="checkbox"/> 23 23.6" <input type="checkbox"/> 31 31.5"	<input checked="" type="checkbox"/> ML Metal	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 60 6000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
<input checked="" type="checkbox"/> 6 5W / 600 lm	<input checked="" type="checkbox"/> LD5 Type V 360° symmetrical	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input checked="" type="checkbox"/> REF Rust Effect
Mounting			
<input checked="" type="checkbox"/> SM Surface-mounted			

Finishes

