




## GENERAL INFORMATION


The BRUME LASER G is a decorative garden bollard featuring a laser-cut aluminum shade over a frosted acrylic diffuser, creating patterned 360° ambient illumination. Combining sculptural aesthetics with functional light output, it offers IP65 protection, dimmable LED performance, and finish options suited for modern outdoor environments.

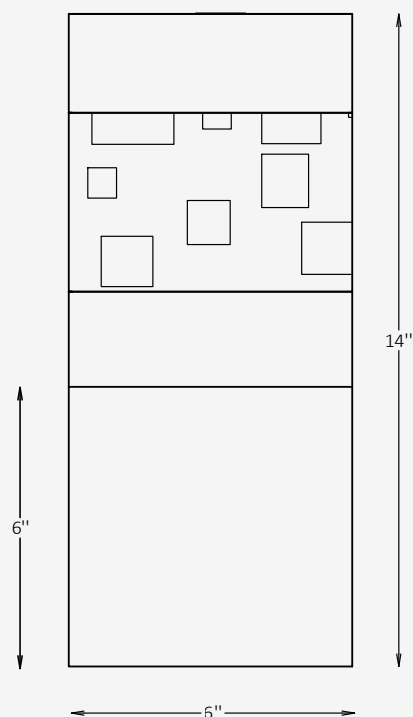

## SPECIFICATIONS

|                    |                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------|
| Material           | Extruded Aluminum + PMMA                                                                     |
| Lens               | Frosted, Acrylic                                                                             |
| Length / Width     | 6" x 6" / Custom on request*                                                                 |
| Total Height       | 14"                                                                                          |
| Base Height        | 8"                                                                                           |
| Light Source Type  | LED                                                                                          |
| Power              | 9.5W / 17W                                                                                   |
| Input Voltage      | 110-277V, 50-60 Hz                                                                           |
| LED Output         | 48 lm/W                                                                                      |
| CCT                | 2200K / 2700K / 3000K / 4000K / 5000K                                                        |
| CRI                | 90                                                                                           |
| Dimming & Driver   | Integral, 0-10V                                                                              |
| Light Distribution | Type V 360° symmetrical light distribution                                                   |
| IP Rating          | IP 65                                                                                        |
| Warranty           | 5 years                                                                                      |
| Finishes           | 16 standard finishes<br>8 wood-effect finishes<br>12 metallic finishes<br>Custom on request* |
| Operating Temp.    | -40°C to +50°C (-40°F to +122°F)                                                             |

## OTHER VERSIONS AVAILABLE

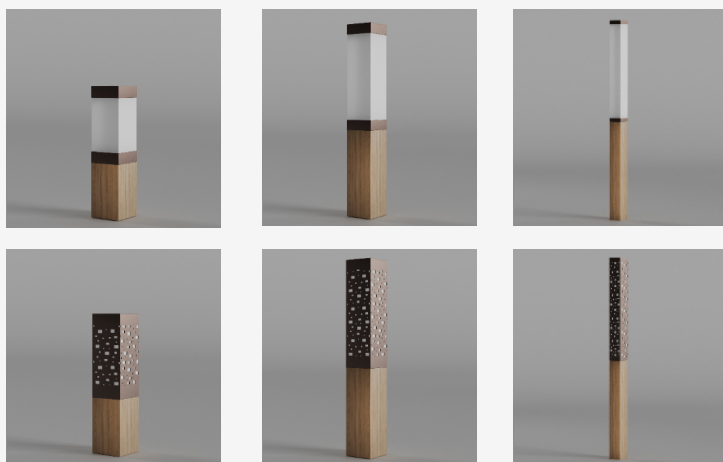

## CERTIFICATION




## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code                                                                                                                                                                                                                          | Length / Width                                                                                                                                                                                                                | Height                                                                                                    | Material                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> <b>BRML-G</b><br>Garden                                                                                                                                                                   | <input type="checkbox"/> <b>6</b><br>6" x 6"<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request                                                                                                                  | <input type="checkbox"/> <b>14</b><br>14"<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request | <input checked="" type="checkbox"/> <b>AL</b><br>Extruded Aluminum                                                                                                                                                                                                                                                                                                              |
| CCT                                                                                                                                                                                                                           | Wattage / Lumens                                                                                                                                                                                                              | Light Distribution                                                                                        | Dimming                                                                                                                                                                                                                                                                                                                                                                         |
| <input type="checkbox"/> <b>22</b><br>2200K<br><br><input type="checkbox"/> <b>30</b><br>3000K<br><br><input type="checkbox"/> <b>40</b><br>4000K<br><br><input type="checkbox"/> <b>50</b><br>5000K                          | <input type="checkbox"/> <b>45</b><br>9,5 W / 450 lm<br><br><input type="checkbox"/> <b>81</b><br>17 W / 815 lm<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request                                               | <input checked="" type="checkbox"/> <b>LD5</b><br>Type V<br><br>360° symmetrical light distribution       | <input type="checkbox"/> <b>NN</b><br>Non-Dimmable<br><br><input type="checkbox"/> <b>DM</b><br>0-10V                                                                                                                                                                                                                                                                           |
| Body Finish Options                                                                                                                                                                                                           | Base Finish Options                                                                                                                                                                                                           | Mounting                                                                                                  | Laser-Cut Pattern                                                                                                                                                                                                                                                                                                                                                               |
| <input type="checkbox"/> <b>ST</b><br>Standard<br><br><input type="checkbox"/> <b>WE</b><br>Wood effect<br><br><input type="checkbox"/> <b>MC</b><br>Metallic<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request | <input type="checkbox"/> <b>ST</b><br>Standard<br><br><input type="checkbox"/> <b>WE</b><br>Wood effect<br><br><input type="checkbox"/> <b>MC</b><br>Metallic<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request | <input checked="" type="checkbox"/> <b>SM</b><br>Surface-mounted                                          | <div> <input type="checkbox"/> <b>NB</b><br/>Nebula           <input type="checkbox"/> <b>PS</b><br/>Pulse         </div> <div> <input type="checkbox"/> <b>SR</b><br/>Strata           <input type="checkbox"/> <b>DR</b><br/>Drift         </div> <div> <input type="checkbox"/> <b>OB</b><br/>Orbis           <input type="checkbox"/> <b>FR</b><br/>Fragment         </div> |

## Finishes

### Standard finishes

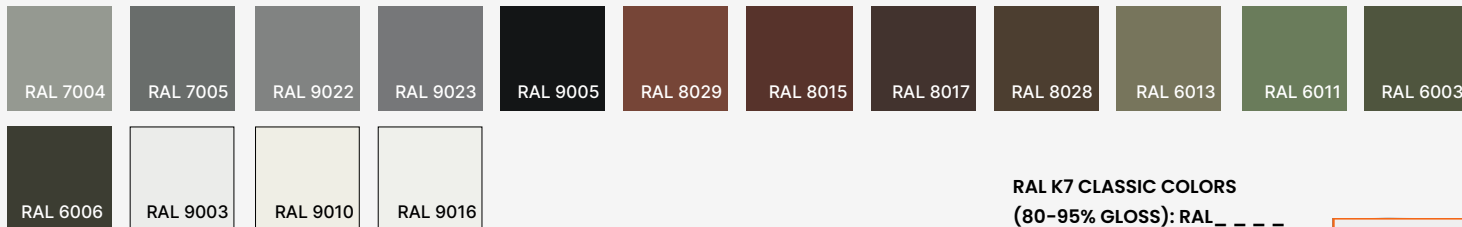

**RAL K7 CLASSIC COLORS**  
(80-95% GLOSS): RAL\_ \_ \_ \_

All RAL Classic colors are available with no setup fee.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



### Wood-effect finishes




### Metallic finishes




# Standard Laser-Cut Shield Designs

Shields are available in both 180° and 360° formats, with options ranging from standardized perforation patterns to fully bespoke designs. Solid 180° configurations can also be provided.

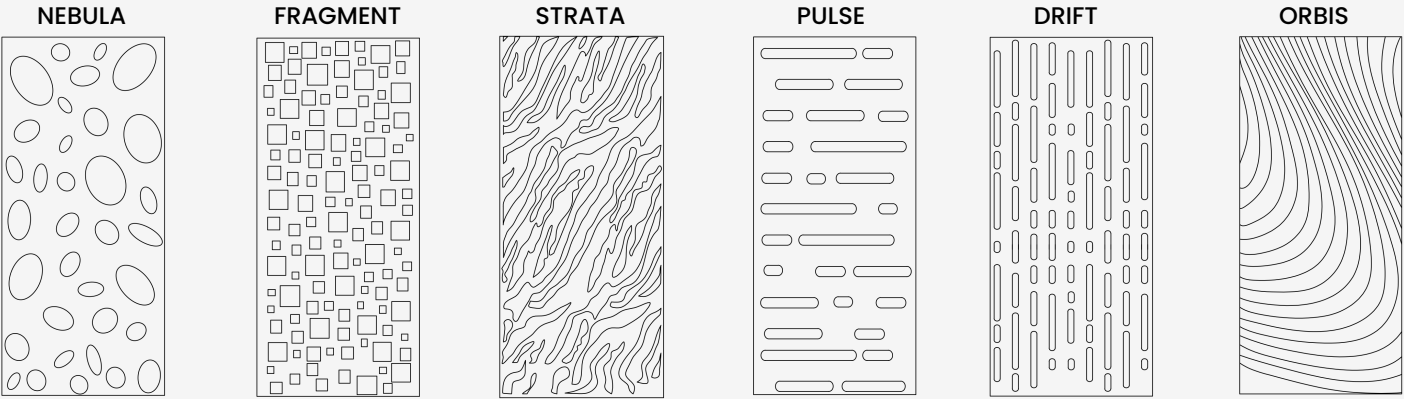

## Bolt Patterns

for Surface-mounted Installation

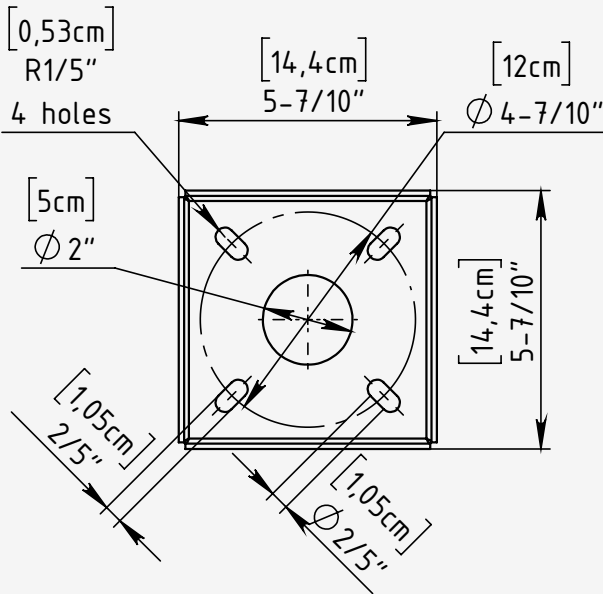

|                       |                                          |
|-----------------------|------------------------------------------|
| Mounting Type         | Surface-mounted                          |
| Base Plate Material   | Stainless Steel                          |
| Bolt Mounting Circle  | Ø: 4-7/10"                               |
| Number of Anchor Bolt | 4 equally holes (90° apart)              |
| Bolt Size             | 1/4"-20 x 3 1/4"<br>concrete anchor bolt |

- Installation Notes:**
- Use a manufacturer-supplied base plate to position anchor bolts accurately.
  - Ensure bolts are embedded vertically and aligned to avoid fixture tilt.
  - Grouting under the base plate is recommended for leveling and load distribution.
  - Allow clearance for wiring through the center opening and access to bolt heads if concealed.