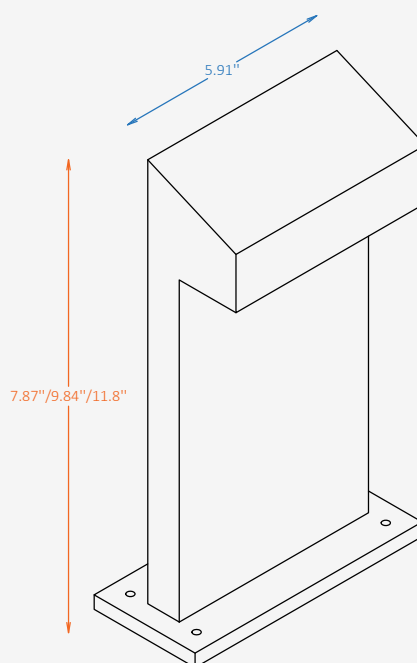




GENERAL INFORMATION

TALUS G is a compact architectural garden luminaire designed to provide precise downward illumination with a bold geometric appearance. Its clean angular form creates a strong visual presence while delivering comfortable, glare-controlled lighting for outdoor environments. Constructed from aluminum with a tempered glass lens, TALUS G is ideal for pathways, gardens, courtyards, and landscape applications. Available in multiple heights and finishes, the fixture combines durable outdoor performance with a refined contemporary aesthetic that complements both residential and commercial settings.



SPECIFICATIONS

Material	Aluminium
Lens	Tempered glass
Height	7.9" / 9.8" / 11.8"
Width	5.91"
Light Source Type	LED
Power	4W / 5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 65
Warranty	5 years
Finishing	16 standard finishes 8 wood-effect finishes 12 metallic finishes
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

CERTIFICATION











Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height	Material	CCT
☒ TLS-G Garden	☐ 8 7.9" ☐ 10 9.8" ☐ 12 11.8"	☒ AL Aluminium	☐ 30 3000K ☐ 40 4000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
☐ 4 4W / 480 lm ☐ 5 5W / 620 lm	☒ LD5 Type V – symmetrical, downward	☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard ☐ Cus Custom on request
Finish Type	Mounting		
☐ GL Glossy ☐ MT Matte	☒ SM Surface-mounted		

Finishes

Standard finishes

 RAL 7004	 RAL 7005	 RAL 9022	 RAL 9023	 RAL 9005	 RAL 8029	 RAL 8015	 RAL 8017	 RAL 8028	 RAL 6013	 RAL 6011	 RAL 6003
 RAL 6006	 RAL 9003	 RAL 9010	 RAL 9016								

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

