




GENERAL INFORMATION

NODEX G is a compact architectural garden luminaire designed to provide precise downward illumination with a bold geometric appearance. Its distinctive offset form creates a modern sculptural presence while delivering efficient pathway and landscape lighting. Constructed from aluminum and engineered for outdoor durability, NODEX G is ideal for walkways, gardens, courtyards, and residential or commercial landscapes. Available in multiple heights and finishes, the fixture combines clean contemporary styling, reliable performance, and comfortable glare-controlled illumination for exterior environments.

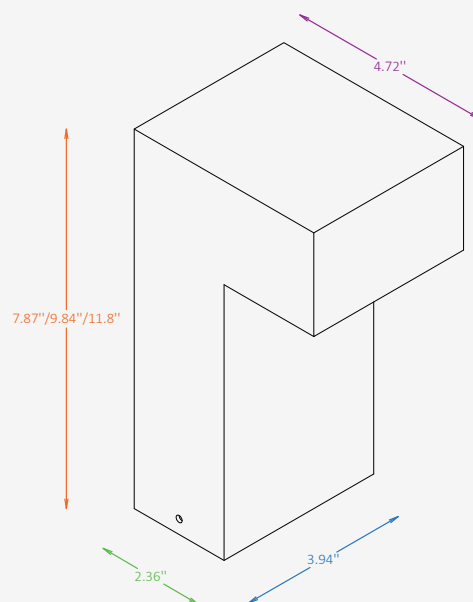

SPECIFICATIONS

Material	Aluminium
Lens	Acrylic
Height	7.9" / 9.8" / 11.8"
Width	3.94"
Depth	2.36"
Light Source Type	LED
Power	4W / 5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 65
Warranty	5 years
Finishing	16 standard finishes
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height	Material	CCT
☒ NDX-G Garden	☐ 8 7.9" ☐ 10 9.8" ☐ 12 11.8"	☒ AL Aluminium	☐ 30 3000K ☐ 40 4000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
☐ 4 4W / 480 lm ☐ 5 5W / 620 lm	☒ LD5 Type V – symmetrical, downward	☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard ☐ Cus Custom on request
Finish Type	Mounting		
☐ GL Glossy ☐ MT Matte	☒ SM Surface-mounted		

Finishes

Standard finishes

RAL 7004	RAL 7005	RAL 9022	RAL 9023	RAL 9005	RAL 8029	RAL 8015	RAL 8017	RAL 8028	RAL 6013	RAL 6011	RAL 6003
RAL 6006	RAL 9003	RAL 9010	RAL 9016								