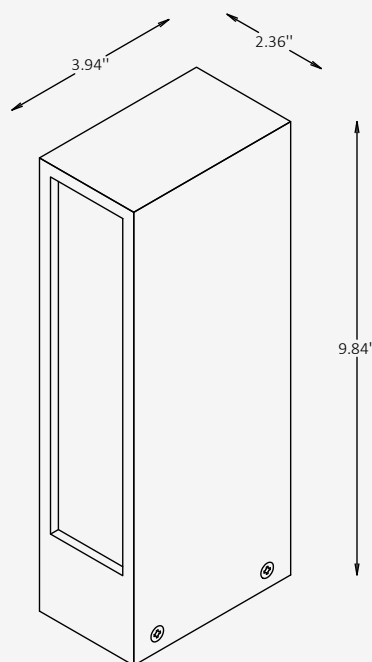




GENERAL INFORMATION

VECTA G is a compact outdoor bollard luminaire defined by its slim rectangular profile and precise linear geometry. The minimalist aluminum body emphasizes vertical clarity and restraint, creating a subtle architectural presence with a reduced visual footprint. Designed to deliver controlled, downward illumination with an asymmetric Type II light distribution, VECTA G is ideal for pathways, edges, and landscape borders where directional guidance, glare control, and clean visual definition are required.



SPECIFICATIONS

Material	Aluminium
Lens	Acrylic
Height	9.84"
Length	2.36"
Width	3.94"
Light Source Type	LED
Power	6W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type II – asymmetric, downward
IP Rating	IP 65
Warranty	5 years
Finishing	16 standard finishes
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION















Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length / Width	Material	CCT
☒ VCT-G Bollard	☒ 9 9.84" / 2.36" / 3.94"	☒ AL Aluminium	☐ 30 3000K ☐ 40 4000K ☐ 60 6000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
☒ 7 6 W / 720 lm	☒ LD2 Type II – asymmetric, downward	☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard ☐ Cus Custom on request
Finish Type	Mounting		
☐ GL Glossy ☐ MT Matte	☒ SM Surface-mounted		

Finishes

Standard finishes

 RAL 7004	 RAL 7005	 RAL 9022	 RAL 9023	 RAL 9005	 RAL 8029	 RAL 8015	 RAL 8017	 RAL 8028	 RAL 6013	 RAL 6011	 RAL 6003
 RAL 6006	 RAL 9003	 RAL 9010	 RAL 9016								

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

