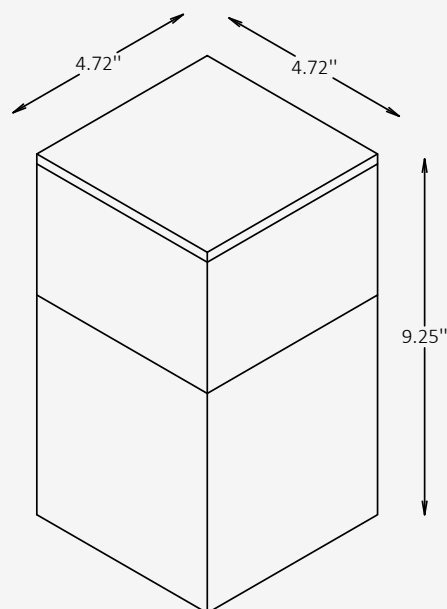




GENERAL INFORMATION

BRIQ G is a low-profile outdoor bollard luminaire defined by its compact cubic form and clear architectural proportions. The solid aluminum housing and continuous luminous top create a grounded, monolithic presence while maintaining visual simplicity and durability for exterior use. Designed to deliver uniform ambient illumination with a symmetrical Type V, 360° light distribution, BRIQ G is ideal for courtyards, terraces, pathways, and landscape settings where subtle guidance, visual comfort, and a refined contemporary character are required.



SPECIFICATIONS

Material	Aluminium
Lens	Acrylic
Height	9.25"
Length	4.72"
Width	4.72"
Light Source Type	LED
Power	5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical
IP Rating	IP 65
Warranty	5 years
Finishing	16 standard finishes
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION















Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length / Width	Material	CCT
☒ BRQ-G Bollard	☒ 9 9.25" / 4.72" / 4.72"	☒ AL Aluminium	☐ 30 3000K ☐ 40 4000K ☐ 60 6000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
☒ 6 5 W / 600 lm	☒ LD5 Type V 360° symmetrical	☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard ☐ Cus Custom on request
Finish Type	Mounting		
☐ GL Glossy ☐ MT Matte	☒ SM Surface-mounted		

Finishes

Standard finishes

 RAL 7004	 RAL 7005	 RAL 9022	 RAL 9023	 RAL 9005	 RAL 8029	 RAL 8015	 RAL 8017	 RAL 8028	 RAL 6013	 RAL 6011	 RAL 6003
 RAL 6006	 RAL 9003	 RAL 9010	 RAL 9016								

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

