




GENERAL INFORMATION

PHAROS G is a compact outdoor bollard luminaire defined by its cylindrical form and layered head detail, creating a refined balance between classic proportion and contemporary design. The solid die-cast aluminum body and controlled light aperture emphasize durability while maintaining a calm, architectural presence. Designed to provide uniform ambient illumination with a symmetrical Type V, 360° light distribution, PHAROS G is well suited for pathways, entrances, and landscape applications where visual comfort, glare control, and consistent light coverage are essential.

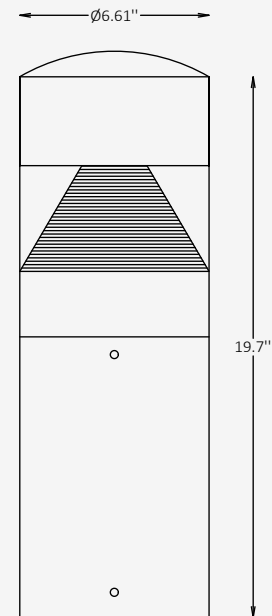

SPECIFICATIONS

Material	Die-cast aluminium + PMMA
Lens	Clear, Acrylic
Diameter	6.6"
Total Height	19.7"
Light Source Type	LED
Power	20W / 25W
Input Voltage	110-277V, 50-60 Hz
LED Output	60 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V / PWM / DALI
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> PHR-B Bollard	<input checked="" type="checkbox"/> 6 6.6"	<input checked="" type="checkbox"/> 19 19.7"	<input checked="" type="checkbox"/> AL Die-cast aluminium
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K	<input type="checkbox"/> 12 20 W / 1200 lm	<input checked="" type="checkbox"/> LD5 Type V	<input type="checkbox"/> NN Non-Dimmable
<input type="checkbox"/> 27 2700K	<input type="checkbox"/> 15 25 W / 1500 lm	360° symmetrical light distribution	<input type="checkbox"/> DM 0-10V
<input type="checkbox"/> 30 3000K			<input type="checkbox"/> PWM PWM
<input type="checkbox"/> 40 4000K			<input type="checkbox"/> DL DALI
<input type="checkbox"/> 50 5000K			
Appliance Class	Body Finish Option	Mounting	
<input type="checkbox"/> AC-I Class I	<input checked="" type="checkbox"/> RAL 9005 RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> SM Surface-mounted	
<input type="checkbox"/> AC-II Class II			

Finishes

Standard finishes

RAL 9005