




GENERAL INFORMATION

The RADIA outdoor pendant showcases a harmonious blend of form and illumination. Crafted from extruded aluminum with a frosted acrylic diffuser, it delivers a soft, even 360° glow that enhances exterior spaces with inviting warmth. Designed for architectural resilience with an IP65 rating, Radia is ideal for patios, terraces, and hospitality environments. Its balanced geometry and refined material palette—available in a wide range of standard, metallic, and wood-effect finishes—bring both performance and aesthetic continuity to outdoor lighting compositions.

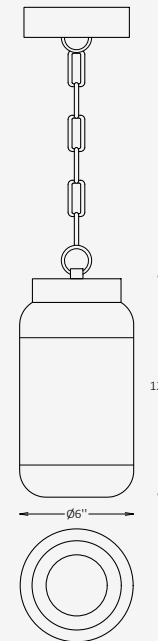

SPECIFICATIONS

Material	Extruded Aluminum
Diffuser	Frosted, Acrylic
Diameter	6"
Height	12"
Light Source Type	LED
Power	15W / 20W / 25W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	2200K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Soft Diffused Ambient + Direct Downlight
IP Rating	IP 65
Warranty	5 years
Finishes	28 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-25°C to +45°C (-13°F to +113°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> RDA Outdoor Pendant	<input type="checkbox"/> 6 6" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 12 12" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> AL Extruded Aluminum <input type="checkbox"/> Cus Custom on request
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 15 15W / 1800 lm <input type="checkbox"/> 20 20 W / 2400 lm <input type="checkbox"/> 25 25W / 3000 lm <input type="checkbox"/> Cus Custom on request	<input checked="" type="checkbox"/> SDA-DL Soft Diffused Ambient + Direct Downlight	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V
Top Housing Finish Option	Main Body Finish Option	Canopy Finish Option	Suspension Option
<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> RGS Rigid Stem <input type="checkbox"/> MCH Metal Chain
Stem/Chain Finish Option	Stem/Chain Length		
<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> L8 8" <input type="checkbox"/> L16 16" <input type="checkbox"/> L24 24" <input type="checkbox"/> L32 32" <input type="checkbox"/> Cus Custom on request		

Project

Notes

Finishes


Standard finishes

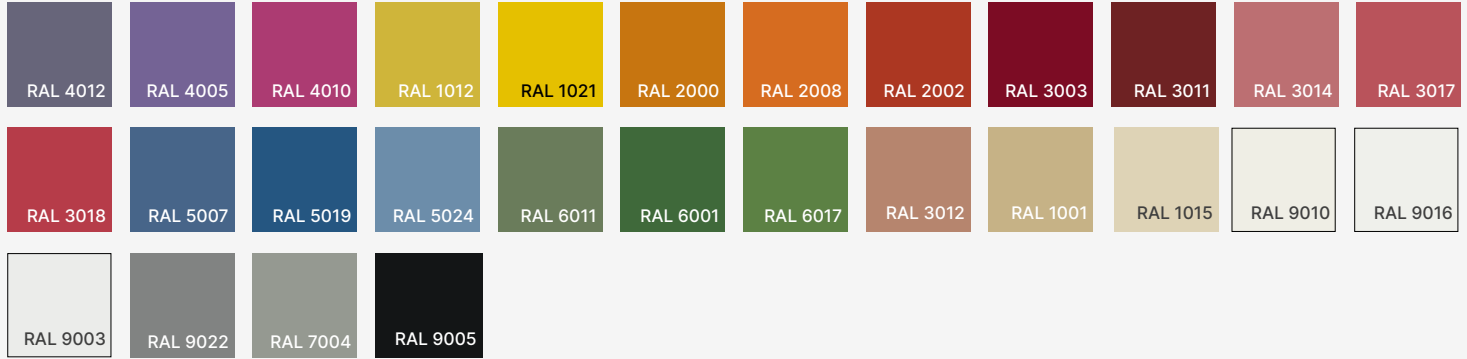

Wood-effect finishes



Metallic finishes

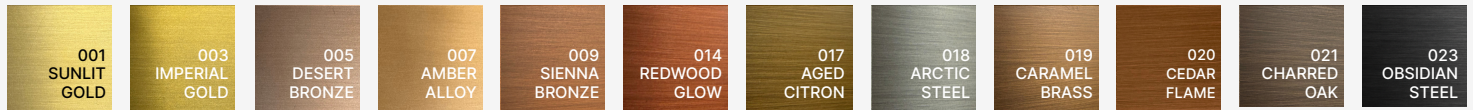

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

