




## GENERAL INFORMATION

The SYLVA FROSTED W is a refined outdoor wall luminaire characterized by its vertical frosted acrylic panels, delivering soft and uniform 360° Type V symmetrical illumination. Designed for architectural façades and landscape accents, it combines the durability of extruded aluminum with IP65 protection and integral 0–10 V dimming. Available in multiple finishes and color temperatures, SYLVA FROSTED W enhances outdoor environments with balanced light and contemporary form.

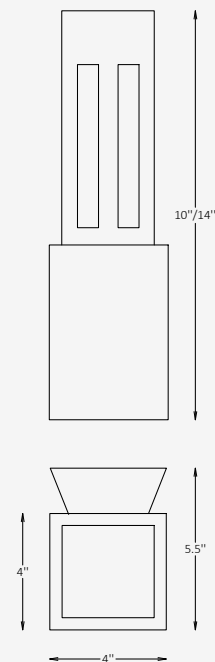

## SPECIFICATIONS

Material	Extruded Aluminum
Lens	Frosted, Acrylic
Length / Width	4" x 4" / Custom on request*
Height	10" / 14"
Depth	5.5"
Light Source Type	LED
Power	10W / 18W / 23W
Input Voltage	110-277V, 50-60 Hz
LED Output	48 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-25°C to +45°C (-13°F to +113°F)

## OTHER VERSIONS AVAILABLE



## CERTIFICATION




## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width	Height	Material
<input checked="" type="checkbox"/> <b>SLVF-W</b> Outdoor Wall	<input type="checkbox"/> <b>4</b> 4" x 4" <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>10</b> 10" <input type="checkbox"/> <b>14</b> 14" <input type="checkbox"/> <b>Cus</b> Custom on request	<input checked="" type="checkbox"/> <b>AL</b> Extruded Aluminum
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> <b>22</b> 2200K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>50</b> 5000K	<input type="checkbox"/> <b>4</b> 10 W / 480 lm <input type="checkbox"/> <b>8</b> 18 W / 864 lm <input type="checkbox"/> <b>11</b> 23 W / 1104 lm <input type="checkbox"/> <b>Cus</b> Custom on request	<input checked="" type="checkbox"/> <b>LD5</b> Type V  360° symmetrical light distribution	<input type="checkbox"/> <b>NN</b> Non-Dimmable <input type="checkbox"/> <b>DM</b> 0-10V
Body Finish Options	Base Finish Options		
<input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>WE</b> Wood effect <input type="checkbox"/> <b>MC</b> Metallic <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>WE</b> Wood effect <input type="checkbox"/> <b>MC</b> Metallic <input type="checkbox"/> <b>Cus</b> Custom on request		

## Finishes

### Standard finishes

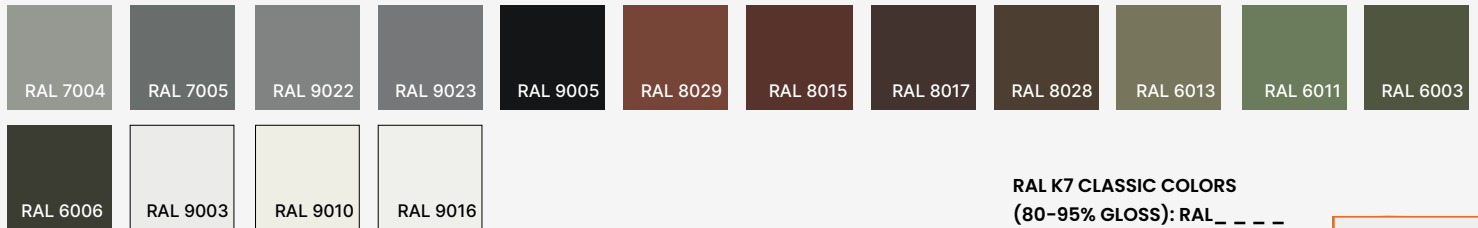

**RAL K7 CLASSIC COLORS**  
(80-95% GLOSS): RAL\_ \_ \_ \_

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



### Wood-effect finishes



### Metallic finishes

