




GENERAL INFORMATION


THORNE LASER W DUAL is an expressive outdoor wall luminaire that combines a cylindrical architectural form with a precision laser-cut upper section, creating a distinctive interplay of light, shadow, and texture. The solid aluminum body is enhanced by decorative perforations that add visual depth while maintaining a refined, contemporary character. Designed to provide both upward and downward illumination, THORNE LASER W DUAL delivers functional façade lighting alongside subtle decorative effects. Ideal for exterior walls, entrances, and hospitality settings, it offers a balanced blend of durability, visual comfort, and architectural detail.

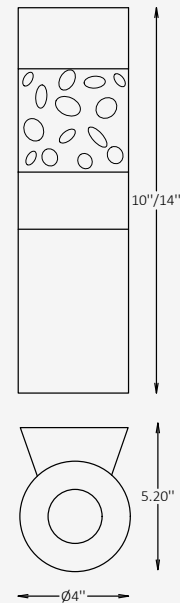

SPECIFICATIONS

Material	Extruded Aluminum
Lens	Frosted, Acrylic
Diameter	4" / Custom on request*
Height	10" / 14"
Depth	5.2"
Light Source Type	LED
Power	12W / 20W / 26W
Input Voltage	110-277V, 50-60 Hz
LED Output	48 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-25°C to +45°C (-13°F to +113°F)

OTHER VERSIONS AVAILABLE

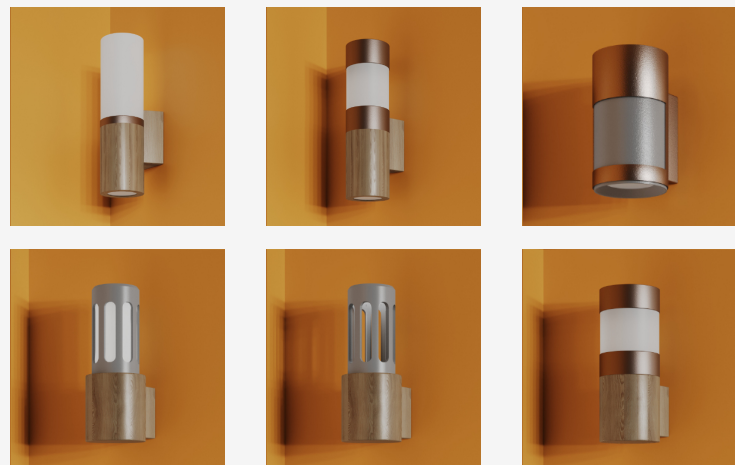

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> THRL-WD Outdoor Wall	<input type="checkbox"/> 4 4"	<input type="checkbox"/> 10 10"	<input checked="" type="checkbox"/> AL Extruded Aluminum
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 14 14"	
		<input type="checkbox"/> Cus Custom on request	
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K	<input type="checkbox"/> 2 12 W / 290 lm (up) / 290 lm (down)	<input checked="" type="checkbox"/> BUD Beam Up & Down	<input type="checkbox"/> NN Non-Dimmable
<input type="checkbox"/> 30 3000K	<input type="checkbox"/> 5 20 W / 500 lm (up) / 500 lm (down)		<input type="checkbox"/> DM 0-10V
<input type="checkbox"/> 40 4000K	<input type="checkbox"/> 6 26 W / 620 lm (up) / 620 lm (down)		
<input type="checkbox"/> 50 5000K	<input type="checkbox"/> Cus Custom on request		
Body Finish Option	Base Finish Option		
<input type="checkbox"/> ST Standard	<input type="checkbox"/> ST Standard		
<input type="checkbox"/> WE Wood effect	<input type="checkbox"/> WE Wood effect		
<input type="checkbox"/> MC Metallic	<input type="checkbox"/> MC Metallic		
<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> Cus Custom on request		

Finishes

Standard finishes

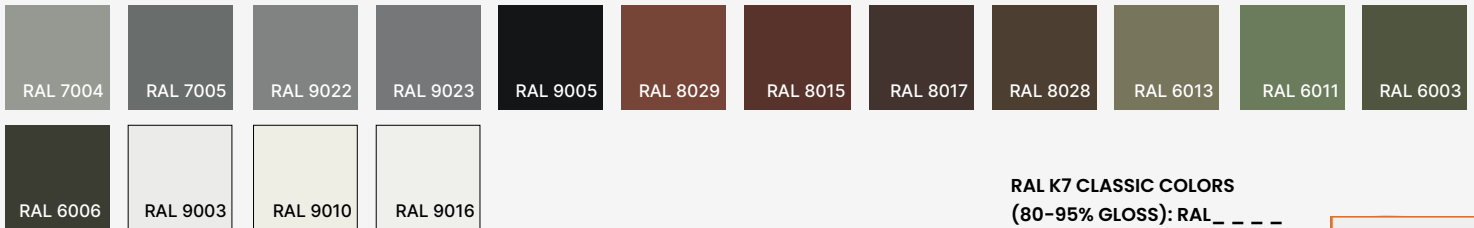

RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes



Metallic finishes

