




GENERAL INFORMATION


NODAL DUAL is a contemporary outdoor wall luminaire defined by its cylindrical form and balanced material composition, combining a solid aluminum body with a softly diffused upper element. The clear geometry and restrained detailing create a refined architectural presence suitable for a wide range of exterior settings. Designed to deliver both upward and downward illumination, NODAL DUAL provides functional façade lighting while enhancing surface depth and spatial rhythm. Ideal for entrances, exterior walls, and hospitality environments, it offers visual comfort, durability, and a timeless modern character.

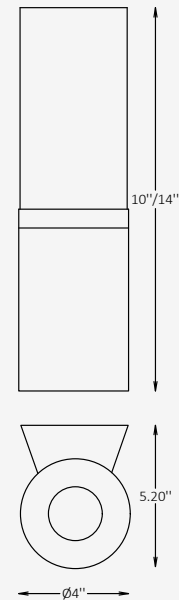

SPECIFICATIONS

Material	Extruded Aluminum
Lens	Frosted, Acrylic
Diameter	4" / Custom on request*
Height	10" / 14"
Depth	5.2"
Light Source Type	LED
Power	12W / 20W / 26W
Input Voltage	110-277V, 50-60 Hz
LED Output	48 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-25°C to +45°C (-13°F to +113°F)

OTHER VERSIONS AVAILABLE

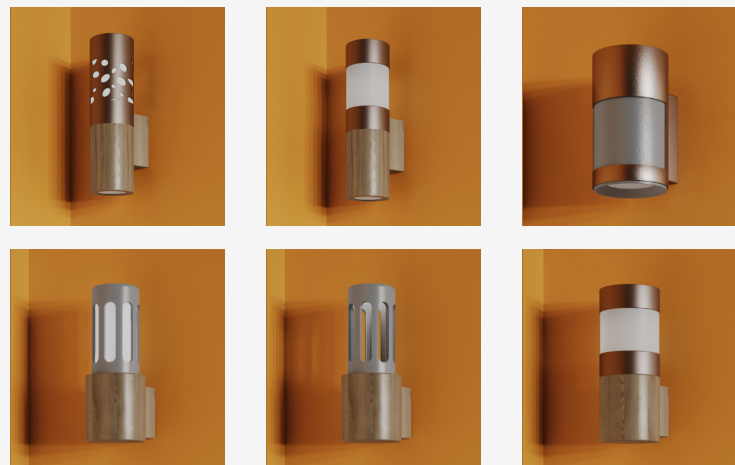

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> NDL-D Outdoor Wall	<input type="checkbox"/> 4 4"	<input type="checkbox"/> 10 10"	<input checked="" type="checkbox"/> AL Extruded Aluminum
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 14 14"	
		<input type="checkbox"/> Cus Custom on request	
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K	<input type="checkbox"/> 2 12 W / 290 lm (up) / 290 lm (down)	<input checked="" type="checkbox"/> BUD Beam Up & Down	<input type="checkbox"/> NN Non-Dimmable
<input type="checkbox"/> 30 3000K	<input type="checkbox"/> 5 20 W / 500 lm (up) / 500 lm (down)		<input type="checkbox"/> DM 0-10V
<input type="checkbox"/> 40 4000K	<input type="checkbox"/> 6 26 W / 620 lm (up) / 620 lm (down)		
<input type="checkbox"/> 50 5000K	<input type="checkbox"/> Cus Custom on request		
Metal Ring Finish Option	Base Finish Option		
<input type="checkbox"/> ST Standard	<input type="checkbox"/> ST Standard		
<input type="checkbox"/> WE Wood effect	<input type="checkbox"/> WE Wood effect		
<input type="checkbox"/> MC Metallic	<input type="checkbox"/> MC Metallic		
<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> Cus Custom on request		

Finishes

Standard finishes

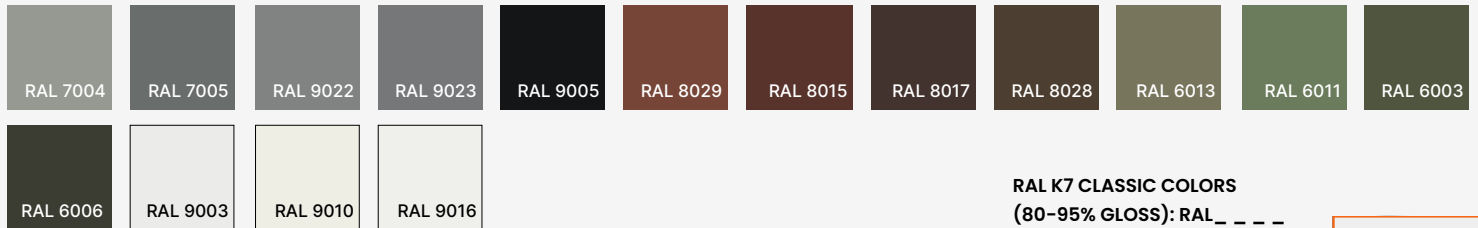

RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes



Metallic finishes

