




## GENERAL INFORMATION

The VELTO is a sculptural acoustic pendant that combines refined illumination with effective sound absorption, using its elongated geometric form to enhance both visual clarity and acoustic comfort. Crafted from a precision-formed aluminum body with high-density acoustic fiber, it offers flexible downlight or up-and-down distributions and multiple size, output, and finish options—providing a versatile, design-forward solution for modern hospitality, workspace, and residential interiors.

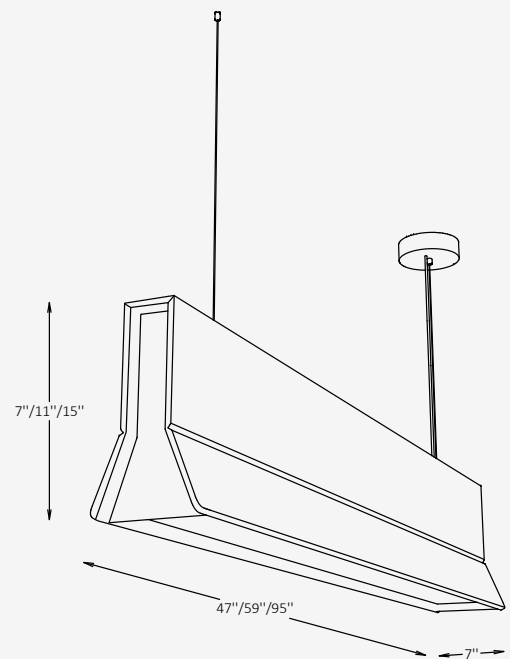

## SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length	47" / 59" / 95"
Height	7" / 11" / 15"
Width	7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	60W / 80W / 120W / 40W+60W / 50W+80W / 80W+120W
LED Output	105 lm/W
CCT	3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down / Beam Up & Down
IP Rating	IP 20
Finishes	27 acoustic fiber finishes
Warranty	5 years

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Height / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>VLT</b> Acoustic / Pendant	<b>*Direct emission</b> <input type="checkbox"/> <b>47-7D</b> 47" / 7" / 60W / 6300 lm <input type="checkbox"/> <b>47-11D</b> 47" / 11" / 60W / 6300 lm <input type="checkbox"/> <b>47-15D</b> 47" / 15" / 60W / 6300 lm <input type="checkbox"/> <b>59-7D</b> 59" / 7" / 80W / 8400 lm <input type="checkbox"/> <b>59-11D</b> 59" / 11" / 80W / 8400 lm <input type="checkbox"/> <b>59-15D</b> 59" / 15" / 80W / 6300 lm <input type="checkbox"/> <b>95-7D</b> 95" / 7" / 120W / 12,600 lm <input type="checkbox"/> <b>95-11D</b> 95" / 11" / 120W / 12,600 lm <input type="checkbox"/> <b>95-15D</b> 95" / 15" / 120W / 12,600 lm	<b>*Direct &amp; Indirect emission</b> <input type="checkbox"/> <b>47-7DI</b> 47" / 7" / 60W, 6300 lm / 40W, 4200 lm <input type="checkbox"/> <b>47-11DI</b> 47" / 11" / 60W, 6300 lm / 40W, 4200 lm <input type="checkbox"/> <b>47-15DI</b> 47" / 15" / 60W, 6300 lm / 40W, 4200 lm <input type="checkbox"/> <b>59-7DI</b> 59" / 7" / 80W / 8400 lm / 40W, 4250 lm <input type="checkbox"/> <b>59-11DI</b> 59" / 11" / 80W / 8400 lm / 40W, 4250 lm <input type="checkbox"/> <b>59-15DI</b> 59" / 15" / 80W / 6300 lm / 40W, 4250 lm <input type="checkbox"/> <b>95-7DI</b> 95" / 7" / 120W / 12,600 lm / 80W / 8400 lm <input type="checkbox"/> <b>95-11DI</b> 95" / 11" / 120W / 12,600 lm / 80W / 8400 lm <input type="checkbox"/> <b>95-15DI</b> 95" / 15" / 120W / 12,600 lm / 80W / 8400 lm	<input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>35</b> 3500K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>50</b> 5000K
<b>Dimming</b> <input type="checkbox"/> <b>NN</b> Non-Dimmable <input type="checkbox"/> <b>DM</b> 0-10V	<b>Acoustic Fiber Finish Option</b> <input type="checkbox"/> <b>AF</b> Acoustic fibers	<b>Canopy Finish Option</b> <input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>MC</b> Metallic <input type="checkbox"/> <b>Cus</b> Custom on request	<b>Cord Length</b> <input type="checkbox"/> <b>L5</b> 59" (adjustable) <input type="checkbox"/> <b>L11</b> 118" (adjustable) <input type="checkbox"/> <b>Cus</b> Custom on request
<b>Cord Finish Option</b> <input type="checkbox"/> <b>SV</b> Standard Vinyl <input type="checkbox"/> <b>DB</b> Decorative Braided <input type="checkbox"/> <b>Cus</b> Custom on request	<b>Mounting</b> <input checked="" type="checkbox"/> <b>MO</b> Multi-Point Suspension		

Project


Notes

# Finishes


## Acoustic fiber finishes



## Standard finishes

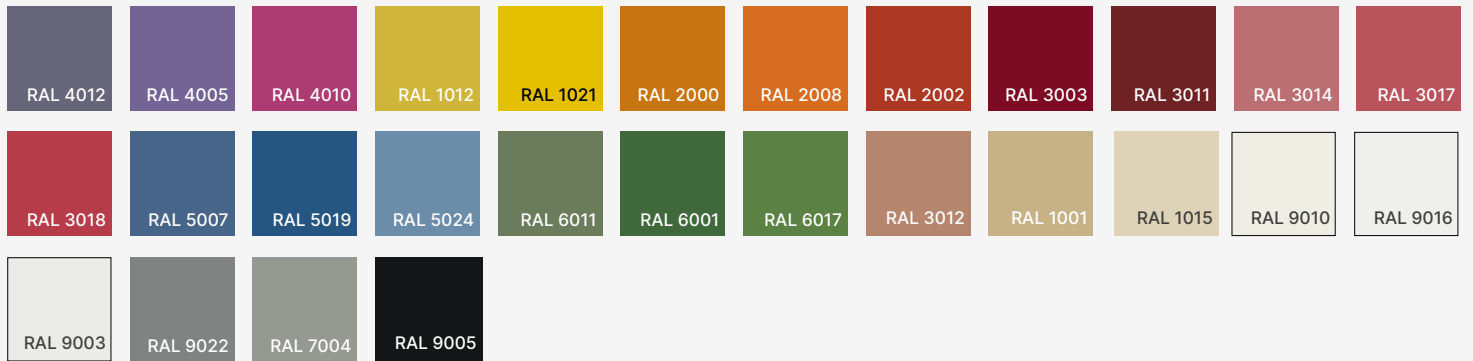


## Metallic finishes



## Cord finishes

### Standard Vinyl



### Decorative Braided



**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

