




## GENERAL INFORMATION

DRUMUL is an acoustic pendant luminaire that combines high-performance illumination with effective sound absorption in a clean cylindrical form. Crafted from 100% PET felt with an integrated LED light source, it enhances both visual comfort and acoustic performance, making it ideal for spaces where aesthetics and functionality are equally important. Designed for offices, hospitality, educational, and collaborative environments, DRUMUL delivers soft, uniform illumination while helping reduce ambient noise and reverberation. Available in multiple diameters, heights, and acoustic felt finishes, it offers a versatile solution for creating comfortable, productive, and visually refined interiors.

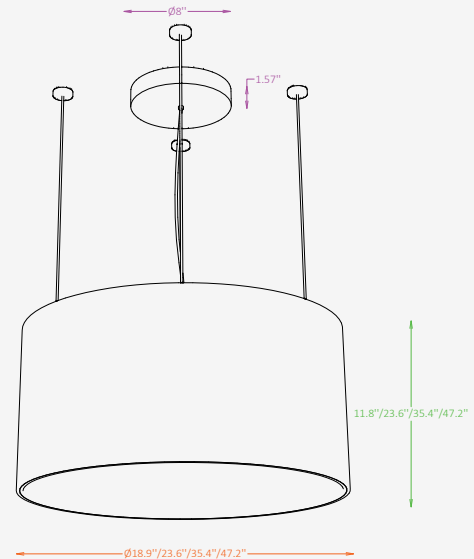

## SPECIFICATIONS

Material	Aluminum , 100% P.E.T. Felt
Diffuser	Acrylic, Frosted
Diameter	18.9" / 23.6" / 35.4" / 47.2"
Height	11.8" / 23.6" / 35.4" / 47.2"
Input Voltage	110-277V, 50-60 Hz
Light Source	LED
Power	25W / 40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct / Direct + Indirect
IP Rating	IP 20
Warranty	5 years
Finishes	38 acoustic fiber finishes

## OTHER VERSIONS AVAILABLE



## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Height / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>DRM</b> Acoustic / Pendant	<input type="checkbox"/> <b>18-11</b> 18.9" / 11.8" / 25W / 2125 lm	<input type="checkbox"/> <b>35-11</b> 35.4" / 11.8" / 90W / 7650 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>18-23</b> 18.9" / 23.6" / 25W / 2125 lm	<input type="checkbox"/> <b>35-23</b> 35.4" / 23.6" / 90W / 7650 lm	<input type="checkbox"/> <b>35</b> 3500K
	<input type="checkbox"/> <b>18-35</b> 18.9" / 35.4" / 25W / 2125 lm	<input type="checkbox"/> <b>35-35</b> 35.4" / 35.4" / 90W / 7650 lm	<input type="checkbox"/> <b>40</b> 4000K
	<input type="checkbox"/> <b>18-47</b> 18.9" / 47.2" / 25W / 2125 lm	<input type="checkbox"/> <b>35-47</b> 35.4" / 47.2" / 90W / 7650 lm	
	<input type="checkbox"/> <b>23-11</b> 23.6" / 11.8" / 40W / 3400 lm	<input type="checkbox"/> <b>47-11</b> 47.2" / 11.8" / 180W / 15,300 lm	
	<input type="checkbox"/> <b>23-23</b> 23.6" / 23.6" / 40W / 3400 lm	<input type="checkbox"/> <b>47-23</b> 47.2" / 23.6" / 180W / 15,300 lm	
	<input type="checkbox"/> <b>23-35</b> 23.6" / 35.4" / 40W / 3400 lm	<input type="checkbox"/> <b>47-35</b> 47.2" / 35.4" / 180W / 15,300 lm	
	<input type="checkbox"/> <b>23-47</b> 23.6" / 47.2" / 40W / 3400 lm	<input type="checkbox"/> <b>47-47</b> 47.2" / 47.2" / 180W / 15,300 lm	
Light Distribution	Dimming	Acoustic Fiber Finish Option	Canopy Finish Option
<input type="checkbox"/> <b>DR</b> Direct	<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input type="checkbox"/> <b>AF</b> Acoustic fibers	<input type="checkbox"/> <b>ST</b> Standard
<input type="checkbox"/> <b>DI</b> Direct + Indirect	<input type="checkbox"/> <b>DM</b> 0-10V		<input type="checkbox"/> <b>CUS</b> Custom on request
Cord Length	Cord Finish Option	Mounting	
<input type="checkbox"/> <b>L59</b> 59" (adjustable)	<input type="checkbox"/> <b>SVW</b> White	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension	
<input type="checkbox"/> <b>CUS</b> Custom on request	<input type="checkbox"/> <b>SVB</b> Black	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension	
	<input type="checkbox"/> <b>SVT</b> Transparent		

Project

Notes

# Finishes

## Acoustic fiber finishes



## Standard finishes



## Cord finishes



DBI  
MILK

**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

