




GENERAL INFORMATION

HARBOR is a premium architectural bollard designed to provide reliable pathway illumination while enhancing safety and the visual appeal of outdoor environments. Its durable stainless steel construction and weather-resistant design ensure long-lasting performance in demanding exterior applications. Ideal for walkways, parks, commercial landscapes, residential developments, and public spaces, HARBOR delivers uniform 360° illumination with excellent visual comfort. An integrated weatherproof GFCI outlet adds convenient access to power for outdoor equipment, making it a practical solution for multifunctional landscape lighting projects.

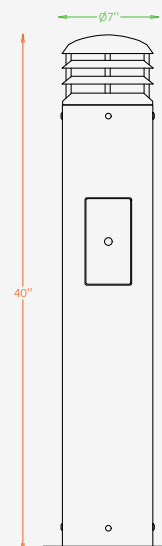

SPECIFICATIONS

Material	Stainless Steel + Acrylic
Diffuser	Acrylic, Frosted
Diameter	7"
Height	40"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	7W / 10W / 16W
LED Output	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V — 360° Symmetrical
IP Rating	IP 65
Warranty	5 years
Finishes	16 RAL finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Outlet Option	120V GFCI duplex receptacle with lockable weatherproof in-use cover. NEMA receptacle option, type by project requirement.
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information


Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
☒ HRB-B Bollard	☐ 7 7"	☐ 40 40"	☐ SSA Stainless Steel + Acrylic
	☐ CUS Custom on request	☐ CUS Custom on request	☐ CUS Custom on request
CCT	Wattage / Lumens	Dimming	Luminaire Head Finish Option
☐ 27 2700K	☐ 7 7W / 560 lm	☐ NN Non-Dimmable	☐ ST Standard
☐ 30 3000K	☐ 10 10W / 800 lm	☐ DM 0-10V	☐ WE Wood effect
☐ 35 3500K	☐ 16 16W / 1280 lm		☐ MC Metallic
☐ 40 4000K	☐ CUS Custom on request		☐ CUS Custom on request
☐ 50 5000K			
☐ CUS Custom on request			
Bollard Body Finish Option	Mounting	Outlet Option	
☐ ST Standard	☐ SM Surface-mounted	☐ NO No outlet	
☐ WE Wood effect	☐ AB Anchored Base	☐ GFCI 120V GFCI duplex receptacle with lockable flush weatherproof cover	
☐ MC Metallic	☐ CUS Custom on request	☐ NEMA Project-specific NEMA receptacle; type to be confirmed per project requirement	
☐ CUS Custom on request			

Note: NEMA receptacle options are available upon request. Exact configuration, voltage, amperage, wiring, and cover type must be confirmed prior to production.

Finishes


Standard finishes

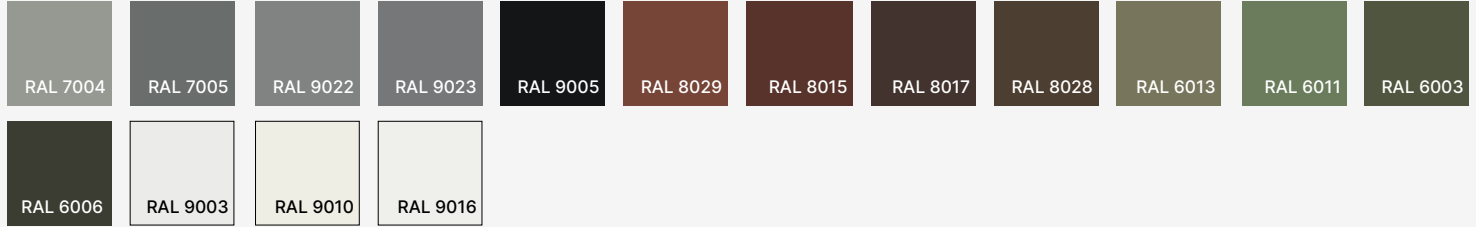

Wood-effect finishes



Metallic finishes

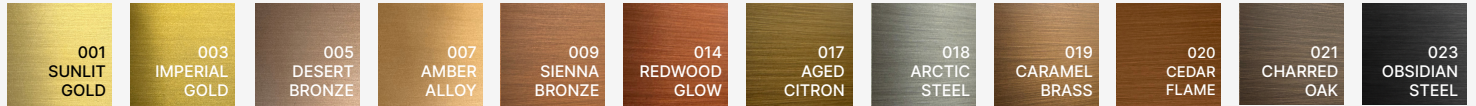

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

