




GENERAL INFORMATION

The SQUIRA RD Ceiling is a low-profile architectural LED luminaire defined by clean geometry, softly rounded corners, and a minimal surface-mounted form. A broad acrylic diffuser delivers uniform direct illumination with reduced glare and comfortable visual performance, while the shallow 3.7" profile integrates cleanly into contemporary ceilings. Available in five sizes with 90 CRI, multiple CCT options, integral 0-10V dimming, and customizable RAL finishes, SQUIRA RD is ideal for commercial, hospitality, workplace, residential, and circulation spaces.

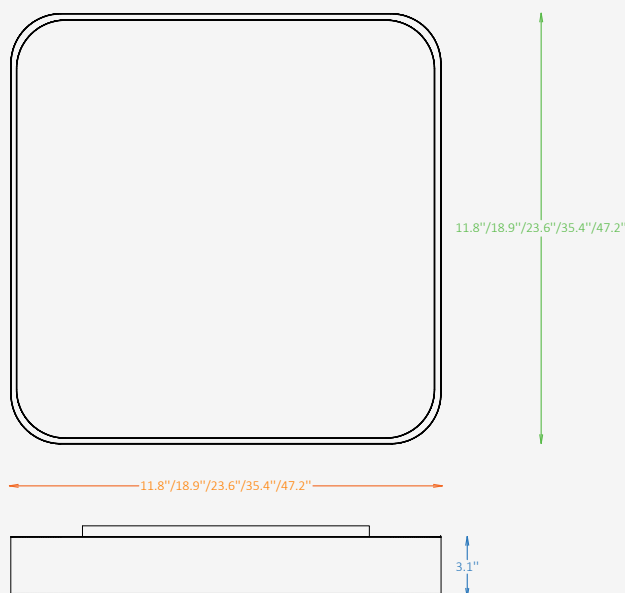

SPECIFICATIONS

Material	Aluminum, Acrylic
Diffuser	Acrylic
Length & Width	11.8" / 18.9" / 23.6" / 35.4" / 47.2"
Height	3.7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	20W / 25W / 40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct, Diffused
IP Rating	IP 20
Warranty	5 years
Finishes	White / Black 23 RAL finishes

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Lenght & Width / Wattage / Lumens	CCT	Dimming
☒ SQR-RD Ceiling	☐ 11 11.8" / 20W / ↓1,700 lm ☐ 18 18.9" / 25W / ↓2,125 lm ☐ 23 23.6" / 40W / ↓3,400 lm ☐ 35 35.4" / 90W / ↓7,650 lm ☐ 47 47.2" / 180W / ↓15,300 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ Cus Custom on request	☐ NN Non-Dimmable ☐ DM 0-10V
CRI	Housing Finish Option		
☐ CR8 80 ☐ CR9 90	☐ ST Standard ☐ RAL RAL finishes		

Finishes

Standard finishes



RAL finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

