





GENERAL INFORMATION

The MODARI VIRELLE is a magnetic track system designed with a distinctive curved linear form, merging geometric precision with creative flexibility. Constructed from high-quality aluminum, it supports multiple magnetic lighting modules that can be easily repositioned or interchanged. Ideal for modern interiors, the VIRELLE system enables both functional illumination and expressive design through customizable configurations and finish options.

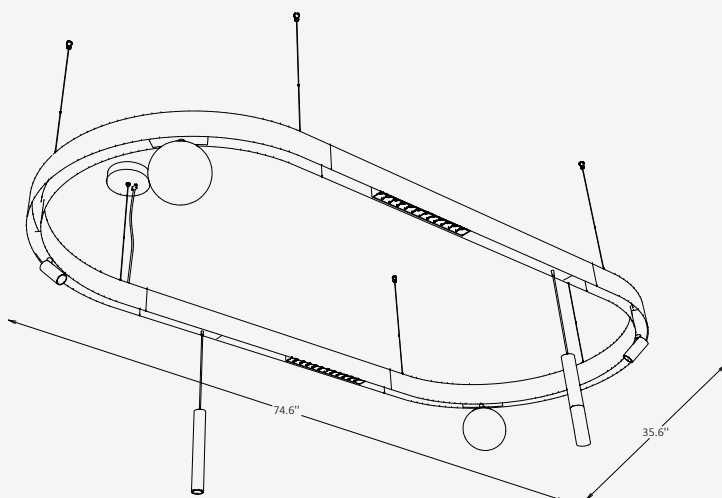


SPECIFICATIONS

Material	Aluminum
Width	35.6"
Length	74.6"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	62W
LED Output	5610 lm
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V / DALI
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 2 metallic finishes Custom on request*

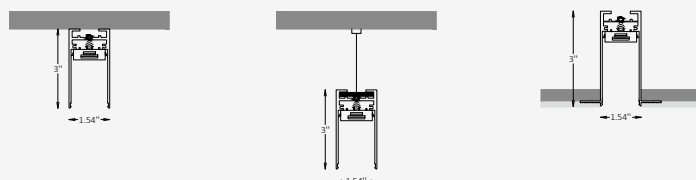

OTHER VERSIONS AVAILABLE

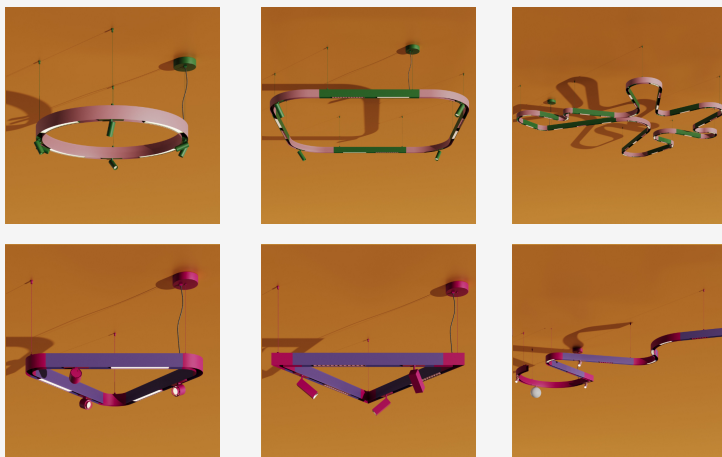

CERTIFICATION



Ordering Information


Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Width / Length	Wattage / Lumens	CCT
☒ VRL-MT Magnetic Track System	☐ 74 35.6" / 74.6"	☐ 62 62W / 5610 lm	☐ 27 2700K
	☐ Cus Custom on request	☐ Cus Custom on request	☐ 30 3000K
			☐ 40 4000K
			☐ Cus Custom on request
Dimming	CRI	Profile Finish Option	Heads Finish Option
☐ NN Non-Dimmable	☐ CR8 80	☐ ST Standard	☐ ST Standard
☐ DM 0-10V	☐ CR9 90	☐ MC Metallic	☐ MC Metallic
☐ DL DALI		☐ AWE A We Lighting Palette*	☐ AWE A We Lighting Palette*
		☐ Cus Custom on request	☐ Cus Custom on request
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
☐ ST Standard	☐ WH White	☐ PN Pendant	☐ L118 118" (adjustable)
☐ MC Metallic	☐ BL Black	☐ MM Surface-mounted	☐ Cus Custom on request
☐ AWE A We Lighting Palette*	☐ Cus Custom on request	☐ RD Recessed	*Available for Pendant models only.
☐ Cus Custom on request	*Available for Pendant models only.		
A-CELL 12 Beam Angle Option	A-FOCUS SHIFT 1 Beam Angle Option	A-DROP Beam Angle Option	A-GLOW 13 Beam Angle Option
☐ CL-12-12 12°	☐ FCS-SF-1-20 20°	☐ DRP-1-20 20°	☐ GLW-13-20 20°
☐ CL-12-34 34°	☐ FCS-SF-1-30 30°	☐ DRP-1-30 30°	
☐ CL-12-48 48°	☐ FCS-SF-1-40 40°	☐ DRP-1-40 40°	

Note: The color combination shown in the photo on the first page of this spec sheet is part of the exclusive A We Lighting Design Palette. This custom palette reflects our brand's identity and is available as a special finish option — A We Lighting Palette*.

Compatible Heads for This Track System

A-CELL 12




A-FOCUS SHIFT 1




A-DROP 1



A-GLOW 13




A-SPHERE SHIFT 6C




Finishes

Standard finishes

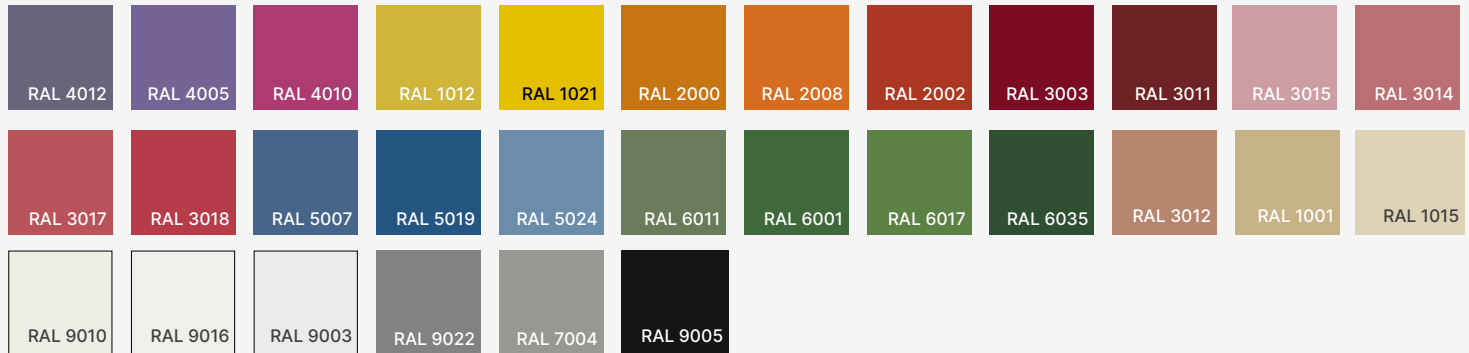

Metallic finishes



RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

