





GENERAL INFORMATION

The Modari Spirra Magnetic Track System features a dynamic modular structure that allows full flexibility in lighting design. Engineered for architectural environments, it supports multiple head types and configurations to achieve customized illumination schemes. With its large-scale geometric form and dual-axis magnetic track connection, Spirra combines visual sophistication with functional precision. Ideal for commercial, hospitality, and modern residential interiors, it provides seamless integration of ambient and accent lighting within a single system.

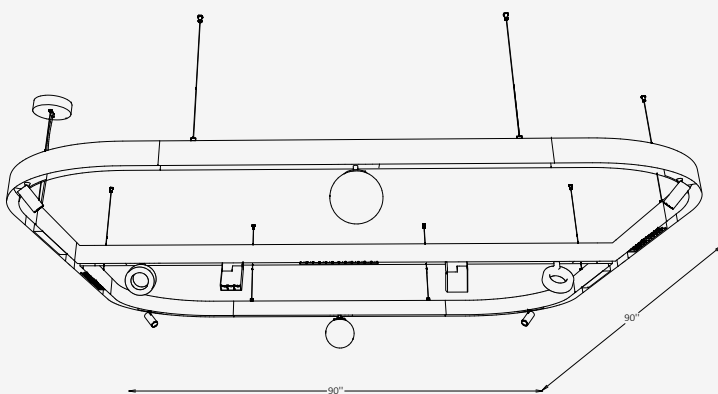


SPECIFICATIONS

Material	Aluminum
Width	90"
Length	90"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	136W
LED Output	10,610 lm
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V / DALI
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 2 metallic finishes Custom on request*

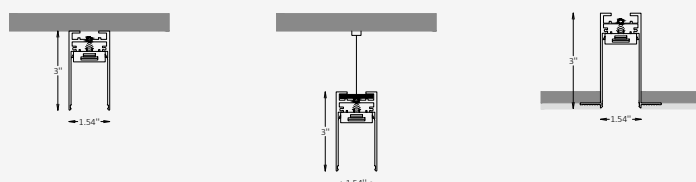

OTHER VERSIONS AVAILABLE

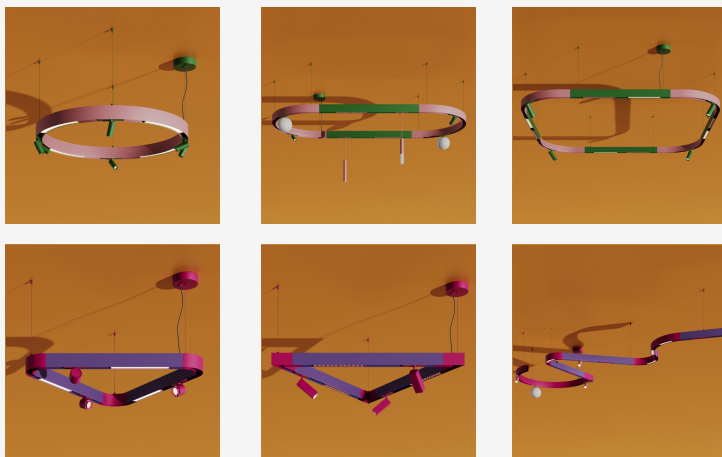

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Width / Length	Wattage / Lumens	CCT
☒ SPR-MT Magnetic Track System	☐ 90 90" / 90" ☐ Cus Custom on request	☐ 136 136 W / 10,610 lm ☐ Cus Custom on request	☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ Cus Custom on request
Dimming	CRI	Profile Finish Option	Heads Finish Option
☐ NN Non-Dimmable ☐ DM 0-10V ☐ DL DALI	☐ CR8 80 ☐ CR9 90	☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request	☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request	☐ WH White ☐ BL Black ☐ Cus Custom on request <i>Available only for the Pendant version*</i>	☐ PN Pendant ☐ MM Surface-mounted ☐ RD Recessed	☐ L118 118" (adjustable) ☐ Cus Custom on request <i>Available only for the Pendant version*</i>
A-CELL 12 Beam Angle Option	A-FOCUS SHIFT 1 Beam Angle Option	A-TILT CELL-3 Beam Angle Option	
☐ AC-12 12° ☐ AC-34 34° ☐ AC-48 48°	☐ FCS-SF-1-20 20° ☐ FCS-SF-1-30 30° ☐ FCS-SF-1-40 40°	☐ TCL-3-12 12° ☐ TCL-3-34 34° ☐ TCL-3-48 48°	Note: The color combination shown in the photo on the first page of this spec sheet is part of the exclusive A We Lighting Design Palette. This custom palette reflects our brand's identity and is available as a special finish option — A We Lighting Palette*.

Compatible Heads for This Track System

A-CELL 12




A-FOCUS 1




A-TILT CELL 3




A-LOOP SOFT 4



A-SPHERE 6C



LINE-X 12



Project

Notes

Finishes

Standard finishes

RAL 4012

RAL 4005

RAL 4010

RAL 1012

RAL 1021

RAL 2000

RAL 2008

RAL 2002

RAL 3003

RAL 3011

RAL 3015

RAL 3014

RAL 3017

RAL 3018

RAL 5007

RAL 5019

RAL 5024

RAL 6011

RAL 6001

RAL 6017

RAL 6035

RAL 3012

RAL 1001

RAL 1015

RAL 9010

RAL 9016

RAL 9003

RAL 9022

RAL 7004

RAL 9005

RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Metallic finishes

SB
SHINY
BRONZE

GL
GOLD