




GENERAL INFORMATION

The SQUIRA S RD Pendant brings the clean geometry of the SQUIRA family into a suspended architectural format. Its slim aluminum housing with softly rounded corners and an acrylic diffuser delivers broad, uniform direct illumination while maintaining a minimal visual profile. Available in five sizes, multiple output levels, 80 or 90 CRI, integral 0–10V dimming, and an extensive selection of RAL finishes, SQUIRA S RD is well suited for commercial, hospitality, workplace, and contemporary residential applications.

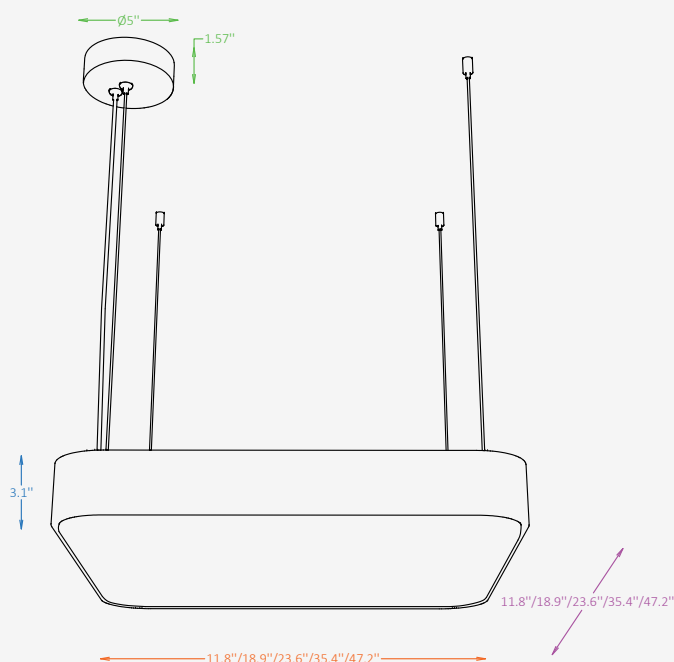

SPECIFICATIONS

Material	Aluminum, Acrylic
Diffuser	Acrylic
Length & Width	11.8" / 18.9" / 23.6" / 35.4" / 47.2"
Height	3.1"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	20W / 25W / 40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct, Diffused
IP Rating	IP 20
Warranty	5 years
Finishes	White / Black 23 RAL finishes

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens	CCT	Dimming
☒ SQR-SRD Pendant	☐ 11 11.8" / 20W / ↓1,700 lm ☐ 18 18.9" / 25W / ↓2,125 lm ☐ 23 23.6" / 40W / ↓3,400 lm ☐ 35 35.4" / 90W / ↓7,650 lm ☐ 47 47.2" / 180W / ↓15,300 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ Cus Custom on request	☐ NN Non-Dimmable ☐ DM 0-10V
CRI	Canopy Finish Option	Cord Finish Option	Cord Length
☐ CR8 80 ☐ CR9 90	☐ ST Standard ☐ RAL RAL finishes	☐ SVW White ☐ SVB Black	☐ L60 60" (adjustable) ☐ Cus Custom on request
Mounting			
☐ CT Central Canopy Suspension ☐ MO Multi-Point Suspension			

Finishes


Standard finishes



RAL finishes

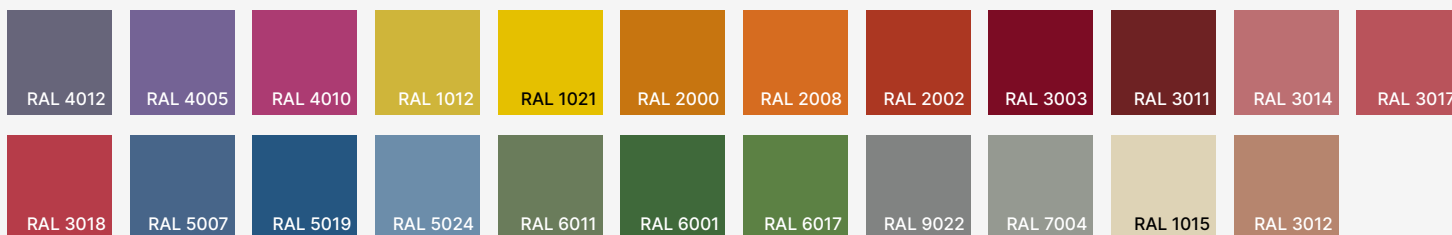

Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

