




GENERAL INFORMATION


PARK is an architectural outdoor bollard luminaire defined by its bold cantilevered form and clear directional intent. The solid stainless-steel body and sharp horizontal overhang create a confident, sculptural presence while emphasizing durability and material integrity. Designed to deliver controlled, downward illumination with a symmetrical Type V distribution, PARK is ideal for pathways, public spaces, and landscape applications where clear visual guidance, glare control, and a strong contemporary identity are required.

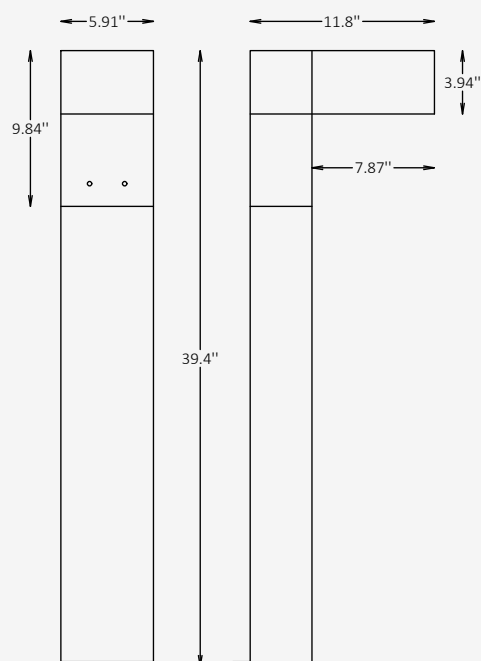

SPECIFICATIONS

Material	Aluminium + PMMA
Lens	Acrylic
Total Height	39.4"
Length	5.91"
Light Source Type	LED
Power	20W / 25W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	110 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 66
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE

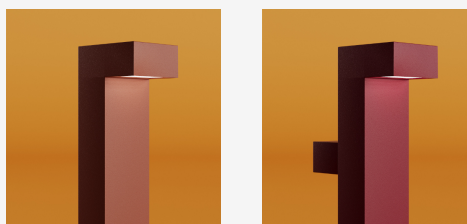

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length	Material	CCT
☒ PRK-B Bollard	☒ 23 39.4" / 5.91"	☒ AL Aluminium	☐ 22 2200K ☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ 50 5000K
Wattage / Lumens	Light Distribution	Dimming	Appliance Class
☐ 22 20 W / 2200 lm ☐ 27 25 W / 2750 lm ☐ 33 30 W / 3300 lm	☒ LD5 Type V – symmetrical, downward	☐ NN Non-Dimmable ☐ DM 0-10V	☒ AC-I Class I
Body Finish Option	Mounting		
☒ RAL 9005 RAL 9005 (smooth glossy)	☒ SM Surface-mounted		

Finishes

Standard finishes

