




## GENERAL INFORMATION

PARALLAX is a contemporary wall luminaire defined by its balanced linear composition and softly diffused illumination. The cylindrical acrylic diffuser is intersected by a refined central mounting element, creating a clean geometric contrast that gives the fixture a subtle architectural character. Designed for residential interiors, hospitality environments, and decorative wall applications, PARALLAX delivers comfortable 360° diffused light with a warm ambient presence. Its minimalist form and wide range of finishes allow the fixture to integrate seamlessly into both modern and timeless interior spaces.

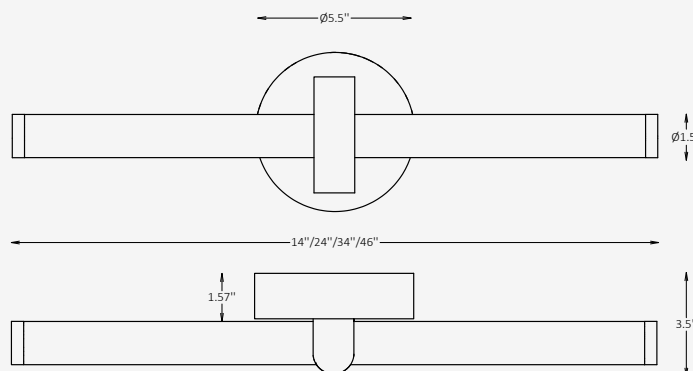

## SPECIFICATIONS

|                    |                                              |
|--------------------|----------------------------------------------|
| Material           | Aluminum + Acrylic                           |
| Diffuser           | Acrylic, Frosted                             |
| Diameter           | 1.5"                                         |
| Length             | 14" / 24" / 34" / 46"                        |
| Input Voltage      | 110-277V, 50-60 Hz                           |
| Light Source Type  | LED                                          |
| Power              | 8W / 12W / 18W / 24W                         |
| LED Output         | 90 lm/W                                      |
| CCT                | 2700K / 3000K / 3500K / 4000K                |
| CRI                | 90                                           |
| Dimming & Driver   | Integral, 0-10V                              |
| Light Distribution | 360°, Diffused                               |
| IP Rating          | IP 44                                        |
| Warranty           | 5 years                                      |
| Finishes           | 34 standard finishes<br>12 metallic finishes |

## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code                                                           | Tube Diameter Ø                                                | Length                                                         | Wattage / Lumens                                               |
|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| <input checked="" type="checkbox"/> <b>PRX</b><br>Wall         | <input type="checkbox"/> <b>1</b><br>1.5"                      | <input type="checkbox"/> <b>14</b><br>14"                      | <input type="checkbox"/> <b>8</b><br>8W / 720 lm               |
|                                                                | <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ | <input type="checkbox"/> <b>24</b><br>24"                      | <input type="checkbox"/> <b>12</b><br>12W / 1080 lm            |
|                                                                |                                                                | <input type="checkbox"/> <b>34</b><br>34"                      | <input type="checkbox"/> <b>18</b><br>18W / 1620 lm            |
|                                                                |                                                                | <input type="checkbox"/> <b>46</b><br>46"                      | <input type="checkbox"/> <b>24</b><br>24W / 2160 lm            |
|                                                                |                                                                | <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ | <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ |
| CCT                                                            | Dimming                                                        | End Caps Finish Option                                         | Canopy Finish Option                                           |
| <input type="checkbox"/> <b>27</b><br>2700K                    | <input type="checkbox"/> <b>NN</b><br>Non-Dimmable             | <input type="checkbox"/> <b>ST</b><br>Standard _____           | <input type="checkbox"/> <b>ST</b><br>Standard _____           |
| <input type="checkbox"/> <b>30</b><br>3000K                    | <input type="checkbox"/> <b>DM</b><br>0-10V                    | <input type="checkbox"/> <b>MC</b><br>Metallic _____           | <input type="checkbox"/> <b>MC</b><br>Metallic _____           |
| <input type="checkbox"/> <b>35</b><br>3500K                    |                                                                | <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ | <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ |
| <input type="checkbox"/> <b>40</b><br>4000K                    |                                                                |                                                                |                                                                |
| <input type="checkbox"/> <b>Cus</b><br>Custom on request _____ |                                                                |                                                                |                                                                |

## Finishes

### Standard finishes

|          |          |          |          |          |          |          |          |          |          |          |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
|          |          |          |          |          |          |          |          |          |          |          |          |
| RAL 4012 | RAL 4003 | RAL 4005 | RAL 4010 | RAL 1012 | RAL 1018 | RAL 1021 | RAL 2000 | RAL 2008 | RAL 2002 | RAL 3003 | RAL 3011 |
|          |          |          |          |          |          |          |          |          |          |          |          |
| RAL 3014 | RAL 3017 | RAL 3018 | RAL 5007 | RAL 5019 | RAL 5024 | RAL 6011 | RAL 6001 | RAL 6017 | RAL 6021 | RAL 6027 | RAL 6033 |
|          |          |          |          |          |          |          |          |          |          |          |          |
| RAL 6039 | RAL 3012 | RAL 1001 | RAL 1015 | RAL 9010 | RAL 9016 | RAL 9003 | RAL 9022 | RAL 7004 | RAL 9005 |          |          |

### Metallic finishes

|                       |                         |                         |                       |                         |                        |                       |                        |                         |                       |                       |                          |
|-----------------------|-------------------------|-------------------------|-----------------------|-------------------------|------------------------|-----------------------|------------------------|-------------------------|-----------------------|-----------------------|--------------------------|
|                       |                         |                         |                       |                         |                        |                       |                        |                         |                       |                       |                          |
| 001<br>SUNLIT<br>GOLD | 003<br>IMPERIAL<br>GOLD | 005<br>DESERT<br>BRONZE | 007<br>AMBER<br>ALLOY | 009<br>SIENNA<br>BRONZE | 014<br>REDWOOD<br>GLOW | 017<br>AGED<br>CITRON | 018<br>ARCTIC<br>STEEL | 019<br>CARAMEL<br>BRASS | 020<br>CEDAR<br>FLAME | 021<br>CHARRED<br>OAK | 023<br>OBSIDIAN<br>STEEL |

**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

