




GENERAL INFORMATION


ALUNA is a decorative globe pendant available in both glass and acrylic versions, offering a clean spherical form with soft, uniform illumination. Its timeless geometry and minimalist detailing create a refined visual presence that complements a wide range of architectural and interior styles. Designed for residential interiors, hospitality environments, lounges, and feature applications, ALUNA delivers comfortable 360° diffused ambient lighting. Available in an extensive range of diameters, finishes, and light source options, the collection provides exceptional design flexibility while maintaining a simple and elegant aesthetic.

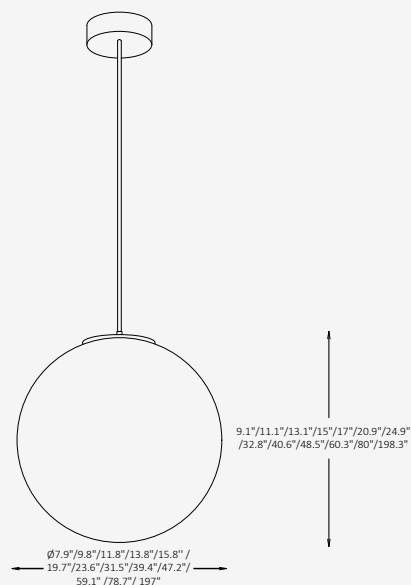

SPECIFICATIONS

Material	Glass or Acrylic + Aluminum
Glass Diameter	11.8" / 15.8"
Acrylic Diameter	7.9" / 9.8" / 11.8" / 13.8" / 15.8" / 19.7" / 23.6" / 31.5" / 39.4" / 47.2" / 59.1" / 78.7" / 197.0"
Overall Height	9.1" / 11.1" / 13.1" / 15" / 17" / 20.9" / 24.9" / 32.8" / 40.6" / 48.5" / 60.3" / 80" / 198.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED / E26 (1 x max. 60W, bulb not included)
Power	3W / 5W / 7W / 10W / 12W / 20W / 30W / 50W / 80W / 110W / 175W / 300W / 480W / (available for LED version only)
LED Output	120 m/W / 90 lm/W (available for LED version only)
CCT	2700K / 3000K / 3500K / 4000K (available for LED version only*)
Dimming & Driver	Integral, 0-10V (available only for LED version*)
CRI	90 (available for LED version only*)
Light Distribution	360° Soft Diffused Ambient
IP Rating	IP20
Warranty	5 years
Finishes	34 RAL finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

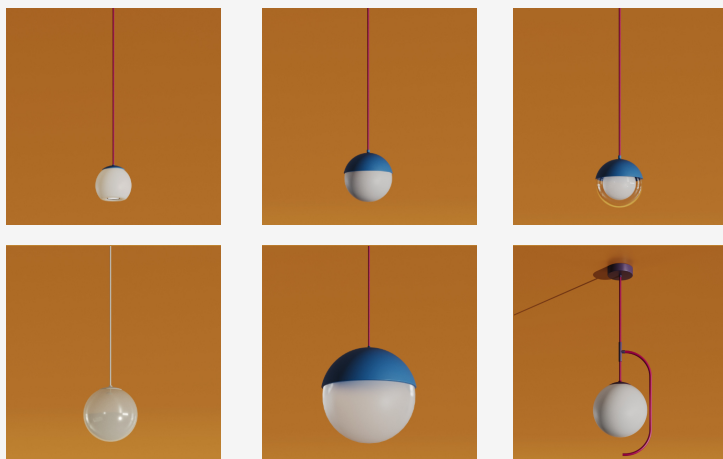

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Height / Light Source		CCT
☒ ALN Pendant	Glass Version ☐ 11-LW 11.8" / 13.1" / LED, 5W / 600 lm ☐ 11-HG 11.8" / 13.1" / LED, 7W / 840 lm ☐ 15-LW 15.8" / 17" / LED, 5W / 600 lm ☐ 15-HG 15.8" / 17" / LED, 7W / 840 lm ☐ 11-E26 11.8" / 13.1" / E26, 1 x max. 60W ☐ 15-E26 15.8" / 17" / E26, 1 x max. 60W ☐ Cus Custom on request	Acrylic Version ☐ 7 7.9" / 9.1" / LED, 3W / 270 lm ☐ 9 9.8" / 11.1" / LED, 5W / 450 lm ☐ 11 11.8" / 13.1" / LED, 7W / 630 lm ☐ 13 13.8" / 15" / LED, 10W / 900 lm ☐ 15 15.8" / 17" / LED, 12W / 1,080 lm ☐ 19 19.7" / 20.9" / LED, 20W / 1,800 lm ☐ 23 23.6" / 24.9" / LED, 30W / 2,700 lm ☐ 31 31.5" / 32.8" / LED, 50W / 4,500 lm ☐ 39 39.4" / 40.6" / LED, 80W / 7,200 lm ☐ 47 47.2" / 48.5" / LED, 110W / 9,900 lm ☐ 59 59.1" / 60.3" / LED, 175W / 15,750 lm ☐ 78 78.7" / 80" / LED, 300W / 27,000 lm ☐ 197 197" / 198.3" / LED, 480W / 43,200 lm ☐ Cus Custom on request	☐ 27 2700K ☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ Cus Custom on request Available for LED version only*
Dimming	Glass Type	Metal Cap Finish Option	Canopy Finish Option
☐ NN Non-Dimmable ☐ DM 0-10V Available for LED version only*	☐ CL Clear ☐ FR Frosted ☐ Cus Custom on request Glass type options apply to glass version only*	☐ ST Standard ☐ MC Metallic ☐ Cus Custom on request	☐ ST Standard ☐ MC Metallic ☐ Cus Custom on request
Cord Length	Cord Finish Option	Mounting	
☐ L59 59" (adjustable) ☐ L118 118" (adjustable) ☐ Cus Custom on request	☐ SVC Standard Vinyl ☐ DB Decorative Braided ☐ Cus Custom on request	☐ SP Single-Point Pendant ☐ MS Multi-Point Suspension ☐ CS Custom Structural Suspension	SP mounting is recommended for Ø7.9"–Ø23.6". MS mounting is recommended for Ø31.5"–Ø47.2". CS mounting is required for Ø59.1" and larger. Final mounting configuration must be confirmed based on fixture weight, ceiling condition, and project requirements.

Finishes

Standard finishes

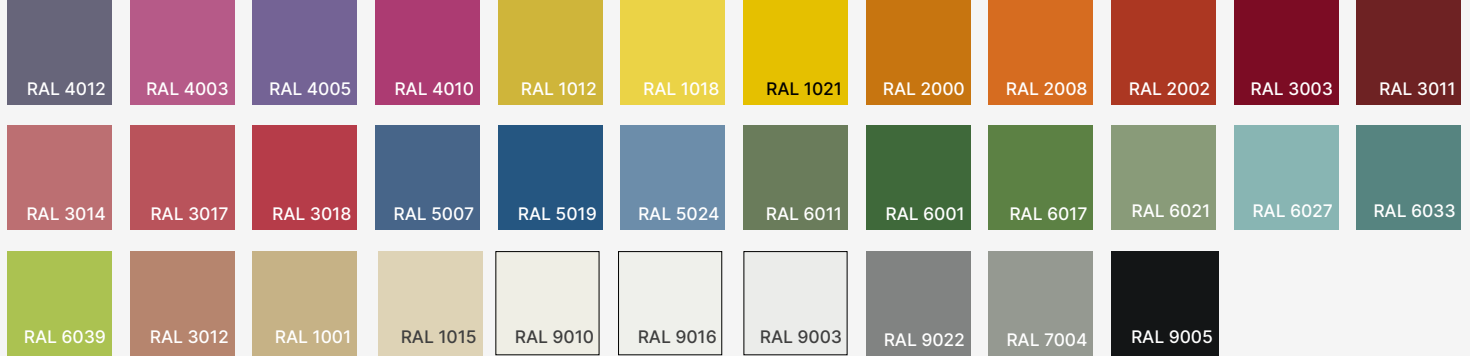


Metallic finishes



Cord finishes

Standard Vinyl



Decorative Braided



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

